

Product datasheet

Specifications



40mm Tower RO Pole 100-240VAC

XVC4M2

⚠ Discontinued on: 9 Oct 2023

⚠ Discontinued

Main

Range Of Product	Harmony XVC4
Product Or Component Type	Complete pre-wired monolithic tower light
Beacon Or Indicator Bank Unit Type	2 illuminated units
Sound Signalling	Without
Mounting Diamete	40 mm
Component Name	XVC
Device Short Name	XVC
Light Source	LED steady red LED steady orange
Supply Circuit Type	AC

Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover SGP (chromium-plated): support tube
Mounting Location	On support tube, 17 mm
Product Mounting	On support tube, 17 mm
[Us] Rated Supply Voltage	100...240 V
[Us] Rated Supply Voltage	100...240 V
Cable Cross Section	0.83 mm ² 0.33 mm ²
Awg Gauge	AWG 22 AWG 18
Cable Length	450 mm
Marking	CE
[Uimp] Rated Impulse Withstand Voltage	4 kV
Current Consumption	45 mA
Net Weight	0.75 kg
Height	602.2 mm

Environment

Standards	EN/IEC 60947-5-1 EN/IEC 60947-1
-----------	------------------------------------

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Certifications	UL
Protective Treatment	TC
Ambient Air Temperature For Storage	-35...70 °C
Ambient Air Temperature For Operation	-10...50 °C
Electrical Shock Protection Class	Class I conforming to EN/IEC 61140
Overvoltage Category	Class I conforming to EN/IEC 61140
Ip Degree Of Protection	IP23 vertical surface installation conforming to EN/IEC 60529

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	7.000 cm
Package 1 Width	80.000 cm
Package 1 Length	7.000 cm
Package 1 Weight	883.000 g
Unit Type Of Package 2	BB1
Number Of Units In Package 2	10
Package 2 Height	34.700 cm
Package 2 Width	75.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	8.833 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	30
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	35.000 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

Well-being performance


	Mercury Free	
	Rohs Exemption Information	Yes
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b1** dimension.

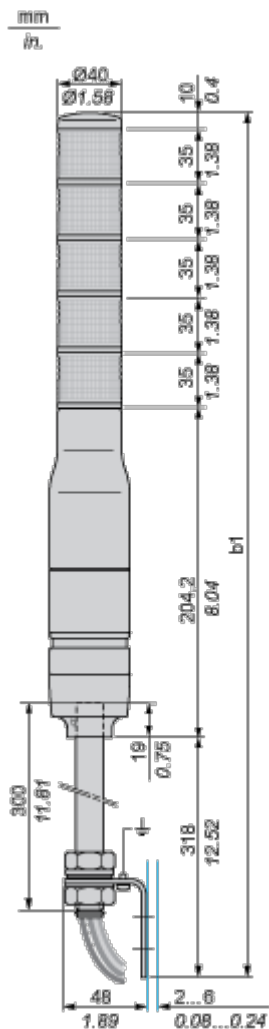

No. of illuminated units	b1 Without buzzer (mm)	b1 Without buzzer (in.)
1 stage	567.20	22.33
2 stages	602.20	23.71
3 stages	637.20	25.09
4 stages	672.20	26.46
5 stages	707.20	27.84

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

