

Product data sheet

Specifications



Harmony XVC, Monolithic precabled tower light, plastic, red orange, Ø40, tube mounting, steady or flashing, buzzer, IP23, 100...240 V AC

XVC4M25S

! Discontinued

! Discontinued on: Dec 2, 2020

! End-of-service on: Dec 31, 2020

Main

Range Of Product	Harmony XVC4
Product Or Component Type	Complete pre-wired monolithic tower light
Beacon Or Indicator Bank Unit Type	2 illuminated units
Sound Signalling	Buzzer
Mounting Diamete	1.57 in (40 mm)
Component Name	XVC
Device Short Name	XVC
Light Source	LED steady or flashing red LED steady or flashing orange
Supply Circuit Type	AC
Noise Level	70...85 dB continuous or intermittent tone)1 m

Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover SGP (chromium-plated): support tube
Mounting Location	On support tube, 17 mm
Product Mounting	On support tube, 17 mm
[Us] Rated Supply Voltage	100...240 V
[Us] Rated Supply Voltage	100...240 V
Cable Cross Section	0.00 in² (0.83 mm²) 0.00 in² (0.33 mm²)
Awg Gauge	AWG 22 AWG 18
Cable Length	17.72 in (450 mm)
Marking	CE
[Uimp] Rated Impulse Withstand Voltage	4 kV
Current Consumption	65 mA
Fundamental Frequency	2.23 kHz
Flashing Frequency	1 Hz

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Net Weight	1.70 lb(US) (0.77 kg)
Height	23.71 in (602.2 mm)

Environment

Standards	EN/IEC 60947-5-1 EN/IEC 60947-1
Product Certifications	UL
Protective Treatment	TC
Ambient Air Temperature For Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature For Operation	14...122 °F (-10...50 °C)
Electrical Shock Protection Class	Class I EN/IEC 61140
Overvoltage Category	Class I EN/IEC 61140
Ip Degree Of Protection	IP23 vertical surface installation EN/IEC 60529

Ordering and shipping details

Category	22617-XVC TOWER LIGHTS
Discount Schedule	XV
Gtin	00785901118725
Returnability	No
Country Of Origin	ID

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile

[End of Life Information](#)

California Proposition 65


WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b1** dimension.

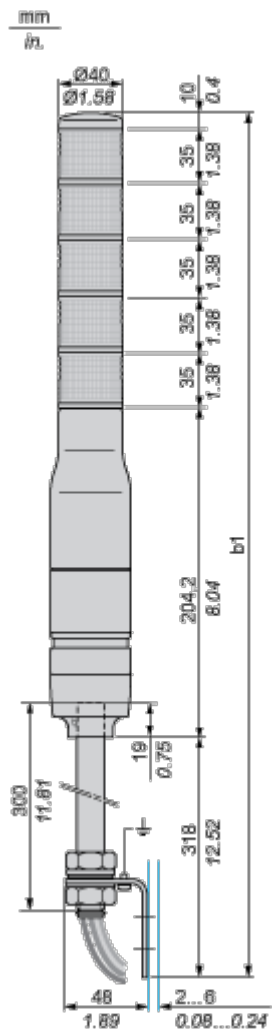

No. of illuminated units	b1 Without buzzer (mm)	b1 Without buzzer (in.)
1 stage	567.20	22.33
2 stages	602.20	23.71
3 stages	637.20	25.09
4 stages	672.20	26.46
5 stages	707.20	27.84

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

