

Product data sheet

Specifications



Complete pre wired monolithic tower light, Harmony XVC, plastic, red orange green, 40mm, tube mounting, steady or flashing, buzzer, 100...240V AC

XVC4M35S

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 418.00 USD

Main

Range Of Product	Harmony XVC4
Product Or Component Type	Complete pre-wired monolithic tower light
Beacon Or Indicator Bank Unit Type	3 illuminated units
Sound Signalling	Buzzer
Mounting Diamete	1.57 in (40 mm)
Component Name	XVC
Device Short Name	XVC
Light Source	LED steady or flashing red LED steady or flashing orange LED steady or flashing green
Supply Circuit Type	AC
Noise Level	70...85 dB continuous or intermittent tone)1 m

Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover SGP (chromium-plated): support tube
Mounting Location	On support tube, 17 mm
Product Mounting	On support tube, 17 mm
[Us] Rated Supply Voltage	100...240 V
[Us] Rated Supply Voltage	100...240 V
Cable Cross Section	0.00 in ² (0.33 mm ²) 0.00 in ² (0.83 mm ²)
Awg Gauge	AWG 22 AWG 18
Cable Length	17.72 in (450 mm)
Marking	CE
[Uimp] Rated Impulse Withstand Voltage	4 kV
Current Consumption	80 mA
Fundamental Frequency	2.23 kHz

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Flashing Frequency	1 Hz
Net Weight	1.76 lb(US) (0.8 kg)
Height	25.09 in (637.2 mm)

Environment

Standards	IEC 60947-1 IEC 60947-5-1
Product Certifications	UL
Protective Treatment	TC
Ambient Air Temperature For Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature For Operation	14...122 °F (-10...50 °C)
Electrical Shock Protection Class	Class I IEC 61140
Overvoltage Category	Class I IEC 61140
IP Degree Of Protection	IP23 vertical surface installation IEC 60529

Ordering and shipping details

Category	US100XV22617
Discount Schedule	00XV
Gtin	3606480072871
Returnability	Yes
Country Of Origin	ID

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	29.13 in (74.000 cm)
Package 1 Width	2.64 in (6.700 cm)
Package 1 Length	2.64 in (6.700 cm)
Package 1 Weight	29.91 oz (848.000 g)
Unit Type Of Package 2	BB1
Number Of Units In Package 2	10
Package 2 Height	6.69 in (17.000 cm)
Package 2 Width	14.37 in (36.500 cm)
Package 2 Length	30.12 in (76.500 cm)
Package 2 Weight	20.81 lb(US) (9.441 kg)
Unit Type Of Package 3	P06
Number Of Units In Package 3	20
Package 3 Height	29.53 in (75.000 cm)
Package 3 Width	23.62 in (60.000 cm)
Package 3 Length	31.50 in (80.000 cm)
Package 3 Weight	60.37 lb(US) (27.382 kg)

Contractual warranty

Warranty

18 months

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

Eu Rohs Directive [Pro-active compliance \(Product out of EU RoHS legal scope\)](#)

China Rohs Regulation [China RoHS declaration](#)

Environmental Disclosure [Product Environmental Profile](#)

Weee The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile [End of Life Information](#)


California Proposition 65 **WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

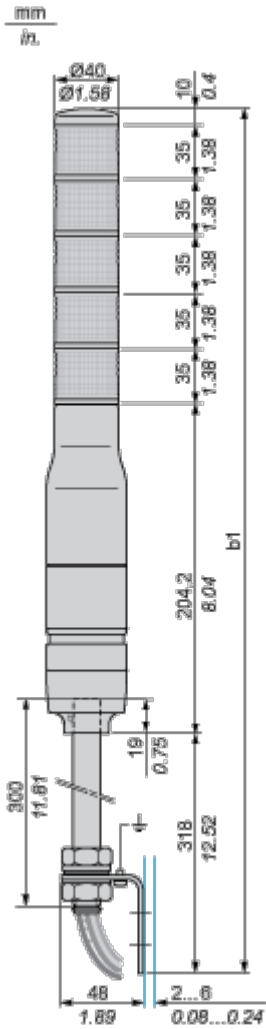

No. of illuminated units	b1 Without buzzer (mm)	b1 Without buzzer (in.)
1 stage	567.20	22.33
2 stages	602.20	23.71
3 stages	637.20	25.09
4 stages	672.20	26.46
5 stages	707.20	27.84

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

