

# Product data sheet

Specifications



Monolithic precabled tower light,  
Harmony XVC, plastic, red orange  
green, 60mm, tube mounting,  
steady, IP23, 24V AC DC

XVC6B3

Product availability: Stock - Normally stocked in distribution  
facility

Price\*: 252.00 USD

## Main

Range Of Product	Harmony XVC6
Product Or Component Type	Complete pre-wired monolithic tower light
Beacon Or Indicator Bank Unit Type	3 illuminated units
Sound Signalling	Without
Mounting Diameter	2.36 in (60 mm)
Component Name	XVC
Light Source	LED steady red LED steady orange LED steady green
[Us] Rated Supply Voltage	24 V
Supply Circuit Type	AC/DC

## Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover STK (chromium-plated): support tube
Product Mounting	On support tube, 22 mm
Cable Cross Section	0.00 in² (0.33 mm²)
Awg Gauge	AWG 22
Cable Length	23.62 in (600 mm)
Marking	CE
[Uimp] Rated Impulse Withstand Voltage	0.8 kV
Current Consumption	75 mA
Flashing Frequency	1 Hz
Net Weight	1.72 lb(US) (0.78 kg)
Height	20.01 in (508.3 mm)

## Environment

Standards	IEC 61000-6-4 IEC 61000-6-2 IEC 61000-6-3
-----------	---

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Certifications	UL
Protective Treatment	TC
Ambient Air Temperature For Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature For Operation	14...122 °F (-10...50 °C)
Electrical Shock Protection Class	Class I IEC 61140
Ip Degree Of Protection	IP23 vertical surface installation IEC 60529

## Ordering and shipping details

Category	US100XV22617
Discount Schedule	00XV
Gtin	3606480032561
Returnability	Yes
Country Of Origin	US

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.54 in (9.000 cm)
Package 1 Width	30.71 in (78.000 cm)
Package 1 Length	3.54 in (9.000 cm)
Package 1 Weight	2.30 lb(US) (1.045 kg)
Unit Type Of Package 2	BB1
Number Of Units In Package 2	10
Package 2 Height	8.27 in (21.000 cm)
Package 2 Width	18.11 in (46.000 cm)
Package 2 Length	31.10 in (79.000 cm)
Package 2 Weight	23.04 lb(US) (10.450 kg)
Unit Type Of Package 3	P06
Number Of Units In Package 3	20
Package 3 Height	29.53 in (75.000 cm)
Package 3 Width	23.62 in (60.000 cm)
Package 3 Length	31.50 in (80.000 cm)
Package 3 Weight	64.82 lb(US) (29.400 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

## Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Circularity Profile

[End of Life Information](#)

California Proposition 65


WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

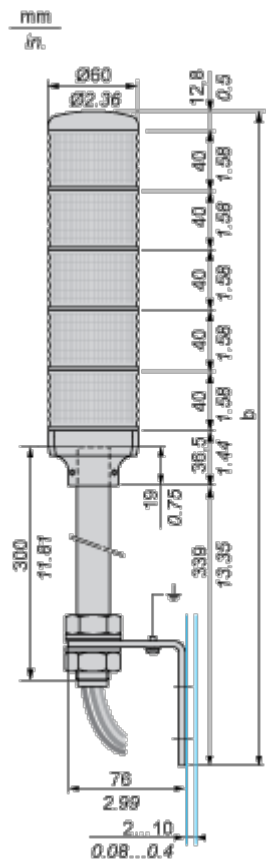

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in.)
1 stage	428.3	16.86
2 stages	468.3	18.44
3 stages	508.3	20.01
4 stages	548.3	20.01
5 stages	588.3	23.16

## Mounting and Clearance

### Pre-assembled and Pre-wired Tower Light

## Support Tube Mounting

