

Product data sheet

Specifications



Harmony XVC, Monolithic precabled tower light, plastic, red orange green blue, Ø60, base mounting, steady, buzzer, IP54, 24 V AC/DC

XVC6B4K

! Discontinued

! Discontinued on: Jul 5, 2023

Main

Range of Product	Harmony XVC6
Product or Component Type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	4 illuminated units
Sound signalling	Without
Mounting diameter	2.4 in (60 mm)
Component name	XVC
Light source	LED steady red LED steady orange LED steady green LED steady blue
[Us] rated supply voltage	24 V
Supply circuit type	AC/DC

Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover
Product mounting	On base
Cable cross section	0.0005 in² (0.33 mm²)
AWG Gauge	AWG 22
Cable length	33.5 in (850 mm)
marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current Consumption	100 mA
Flashing frequency	1 Hz
Net Weight	0.77 lb(US) (0.35 kg)
Height	9.5 in (240.8 mm)

Environment

Standards	IEC 61000-6-4 IEC 61000-6-2 IEC 61000-6-3
Product Certifications	UL

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

protective treatment	TC
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature for Operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class II IEC 61140
IP degree of protection	IP54 flat surface installation IEC 60529

Ordering and shipping details

Category	22617-XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	3606480032622
Returnability	No
Country of origin	JP

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.3 in (8.5 cm)
Package 1 Width	3.3 in (8.5 cm)
Package 1 Length	19.7 in (50.0 cm)
Package 1 Weight	18.0 oz (510.0 g)
Unit Type of Package 2	S04
Number of Units in Package 2	12
Package 2 Height	11.8 in (30.0 cm)
Package 2 Width	15.7 in (40.0 cm)
Package 2 Length	23.6 in (60.0 cm)
Package 2 Weight	16.252 lb(US) (7.372 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-------------------	--

China Rohs Regulation	China RoHS declaration
-----------------------	--

Environmental Disclosure	Product Environmental Profile
--------------------------	---

Circularity Profile	End of Life Information
---------------------	---


California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
---------------------------	---

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

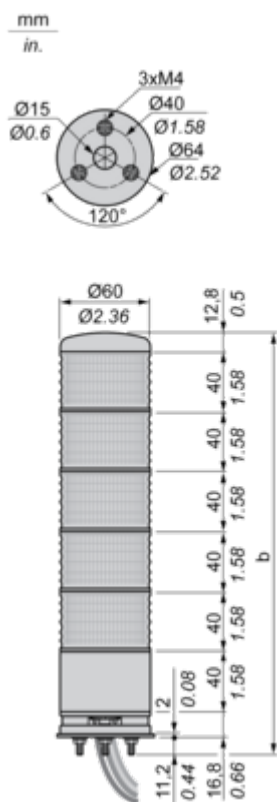

No. of illuminated units	b (mm)	b (in.)
1 stage	120.8	4.76
2 stages	160.8	6.33
3 stages	200.8	7.90
4 stages	240.8	9.48
5 stages	280.8	11.06

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

