

Product data sheet

Specifications



Complete pre wired monolithic tower light, Harmony XVC, plastic, red orange green blue clear,60mm, tube mounting, steady or flashing, buzzer,24V AC DC

XVC6B55S

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 473.00 USD

Main

Range Of Product	Harmony XVC6
Product Or Component Type	Complete pre-wired monolithic tower light
Beacon Or Indicator Bank Unit Type	5 illuminated units
Sound Signalling	Buzzer
Mounting Diamete	2.36 in (60 mm)
Component Name	XVC
Light Source	LED steady or flashing red LED steady or flashing orange LED steady or flashing green LED steady or flashing blue LED steady or flashing clear
[Us] Rated Supply Voltage	24 V
Supply Circuit Type	AC/DC
Noise Level	70...85 dB continuous or intermittent tone)1 m

Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover STK (chromium-plated): support tube
Product Mounting	On support tube, 22 mm
Cable Cross Section	0.00 in² (0.33 mm²)
Awg Gauge	AWG 22
Cable Length	21.65 in (550 mm)
Marking	CE
[Uimp] Rated Impulse Withstand Voltage	0.8 kV
Current Consumption	165 mA
Fundamental Frequency	2.23 kHz
Flashing Frequency	1 Hz
Net Weight	2.34 lb(US) (1.06 kg)
Height	25.32 in (643.1 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environment

Standards	IEC 61000-6-2 IEC 61000-6-3 IEC 61000-6-4
Product Certifications	UL
Protective Treatment	TC
Ambient Air Temperature For Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature For Operation	14...122 °F (-10...50 °C)
Electrical Shock Protection Class	Class I IEC 61140
Ip Degree Of Protection	IP23 vertical surface installation IEC 60529

Ordering and shipping details

Category	US100XV22617
Discount Schedule	00XV
Gtin	3606480032684
Returnability	No
Country Of Origin	ID

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.15 in (8.000 cm)
Package 1 Width	3.54 in (9.000 cm)
Package 1 Length	30.71 in (78.000 cm)
Package 1 Weight	2.36 lb(US) (1.069 kg)
Unit Type Of Package 2	BB1
Number Of Units In Package 2	10
Package 2 Height	7.95 in (20.200 cm)
Package 2 Width	18.11 in (46.000 cm)
Package 2 Length	30.91 in (78.500 cm)
Package 2 Weight	28.42 lb(US) (12.890 kg)
Unit Type Of Package 3	P06
Number Of Units In Package 3	20
Package 3 Height	29.53 in (75.000 cm)
Package 3 Width	23.62 in (60.000 cm)
Package 3 Length	31.50 in (80.000 cm)
Package 3 Weight	75.57 lb(US) (34.280 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-------------------	--

China Rohs Regulation	China RoHS declaration
-----------------------	--

Environmental Disclosure	Product Environmental Profile
--------------------------	---

Circularity Profile	End of Life Information
---------------------	---


California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
---------------------------	---

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b1** dimension.

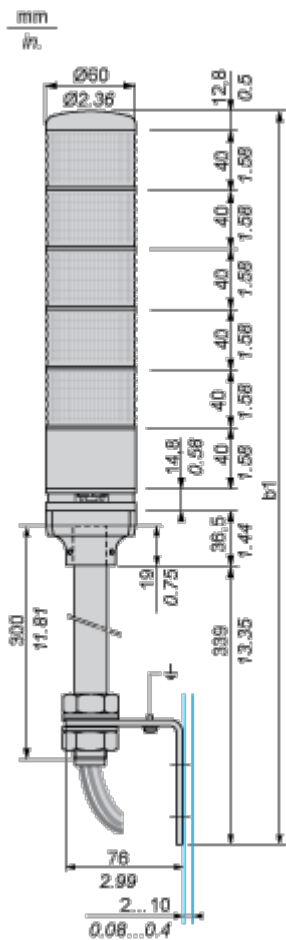

No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	483.1	19.02
2 stages	523.1	20.59
3 stages	563.1	22.17
4 stages	603.1	23.74
5 stages	643.1	25.32

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

