

# Product data sheet

Specifications



Harmony XVC, Monolithic precabled tower light, plastic, red, Ø60, tube mounting, steady, IP23, 100...240 V AC

XVC6M1

⚠ Discontinued

⚠ Discontinued on: Oct 9, 2023

Product availability: Non-Stock - Not normally stocked in distribution facility

## Main

Range Of Product	Harmony XVC6
Product Or Component Type	Complete pre-wired monolithic tower light
Beacon Or Indicator Bank Unit Type	1 illuminated unit
Sound Signalling	Without
Mounting Diamete	2.36 in (60 mm)
Component Name	XVC
Light Source	LED steady red
[Us] Rated Supply Voltage	100...240 V
Supply Circuit Type	AC

## Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover
Product Mounting	On support tube, 22 mm
Cable Cross Section	0.00 in² (0.33 mm²) 0.00 in² (0.83 mm²)
Awg Gauge	AWG 18 AWG 22
Cable Length	17.72 in (450 mm) 21.65 in (550 mm)
Marking	CE
[Uimp] Rated Impulse Withstand Voltage	4 kV
Current Consumption	35 mA
Net Weight	2.12 lb(US) (0.96 kg)
Height	23.61 in (599.8 mm)

## Environment

Standards	IEC 60947-1 IEC 60947-5-1
Product Certifications	UL

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Protective Treatment	TC
Ambient Air Temperature For Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature For Operation	14...122 °F (-10...50 °C)
Electrical Shock Protection Class	Class I IEC 61140
Ip Degree Of Protection	IP23 vertical surface installation IEC 60529

## Ordering and shipping details

Category	US100XV22617
Discount Schedule	00XV
Gtin	3606480072550
Returnability	No
Country Of Origin	ID

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.35 in (8.500 cm)
Package 1 Width	3.35 in (8.500 cm)
Package 1 Length	30.51 in (77.500 cm)
Package 1 Weight	2.50 lb(US) (1.134 kg)
Unit Type Of Package 2	BB1
Number Of Units In Package 2	10
Package 2 Height	7.87 in (20.000 cm)
Package 2 Width	18.11 in (46.000 cm)
Package 2 Length	31.10 in (79.000 cm)
Package 2 Weight	28.08 lb(US) (12.736 kg)
Unit Type Of Package 3	P12
Number Of Units In Package 3	40
Package 3 Height	29.53 in (75.000 cm)
Package 3 Width	31.50 in (80.000 cm)
Package 3 Length	47.24 in (120.000 cm)
Package 3 Weight	131.05 lb(US) (59.444 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

## Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-------------------	--

China Rohs Regulation	<a href="#">China RoHS declaration</a>
-----------------------	--

Environmental Disclosure	<a href="#">Product Environmental Profile</a>
--------------------------	---

Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
------	--

Circularity Profile	<a href="#">End of Life Information</a>
---------------------	---


California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
---------------------------	---

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b1** dimension.

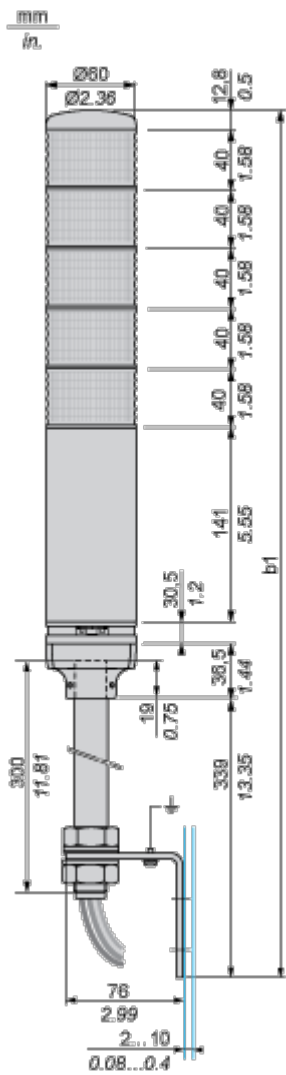

No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	599.8	23.61
2 stages	639.8	25.19
3 stages	679.8	26.76
4 stages	719.8	28.34
5 stages	759.8	29.91

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

