

# Product data sheet

Specifications



Harmony XVC, Monolithic precabled tower light, plastic, red orange, Ø60, base mounting, steady or flashing, buzzer, IP54, 100...240 V AC

XVC6M25SK

! Discontinued

! Discontinued on: Dec 2, 2020

! End-of-service on: Dec 31, 2020

Product availability: Non-Stock - Not normally stocked in distribution facility

## Main

Range Of Product	Harmony XVC6
Product Or Component Type	Complete pre-wired monolithic tower light
Beacon Or Indicator Bank Unit Type	2 illuminated units
Sound Signalling	Buzzer
Mounting Diamete	2.36 in (60 mm)
Component Name	XVC
Light Source	LED steady or flashing red LED steady or flashing orange
[Us] Rated Supply Voltage	100...240 V
Supply Circuit Type	AC
Noise Level	70...85 dB continuous or intermittent tone)1 m

## Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover
Product Mounting	On base
Cable Cross Section	0.00 in² (0.33 mm²) 0.00 in² (0.83 mm²)
Awg Gauge	AWG 18 AWG 22
Cable Length	33.46 in (850 mm) 29.53 in (750 mm)
Marking	CE
[Uimp] Rated Impulse Withstand Voltage	4 kV
Current Consumption	75 mA
Fundamental Frequency	2.23 kHz
Flashing Frequency	1 Hz
Net Weight	1.21 lb(US) (0.55 kg)
Height	10.71 in (272 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

## Environment

Standards	EN/IEC 60947-5-1 EN/IEC 60947-1
Product Certifications	UL
Protective Treatment	TC
Ambient Air Temperature For Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature For Operation	14...122 °F (-10...50 °C)
Electrical Shock Protection Class	Class I EN/IEC 61140
Ip Degree Of Protection	IP54 flat surface installation EN/IEC 60529

## Ordering and shipping details

Category	US100XV22617
Discount Schedule	00XV
Gtin	00785901395874
Returnability	No
Country Of Origin	ID

## Contractual warranty

Warranty	18 months
----------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

## Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile

[End of Life Information](#)

California Proposition 65


WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

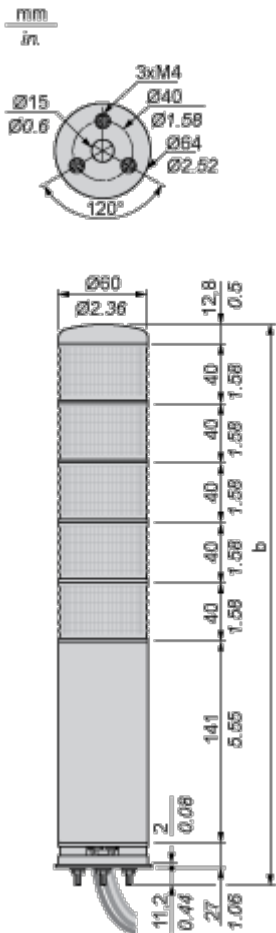

No. of illuminated units	b (mm)	b (in.)
1 stage	232	9.13
2 stages	272	10.71
3 stages	312	12.28
4 stages	352	13.86
5 stages	392	15.43

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

