

# Product data sheet

Specifications



Harmony XVC, Monolithic precabled tower light, plastic, red orange, Ø60, base mounting, IP54, steady, 100...240 V AC

XVC6M2K

! Discontinued

! Discontinued on: Jan 12, 2023

! End-of-service on: Mar 31, 2023

Product availability: Non-Stock - Not normally stocked in distribution facility

## Main

Range Of Product	Harmony XVC6
Product Or Component Type	Complete pre-wired monolithic tower light
Beacon Or Indicator Bank Unit Type	2 illuminated units
Sound Signalling	Without
Mounting Diamete	2.36 in (60 mm)
Component Name	XVC
Light Source	LED steady red LED steady orange
[Us] Rated Supply Voltage	100...240 V
Supply Circuit Type	AC

## Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover
Product Mounting	On base
Cable Cross Section	0.00 in² (0.33 mm²) 0.00 in² (0.83 mm²)
Awg Gauge	AWG 22 AWG 18
Cable Length	29.53 in (750 mm) 33.46 in (850 mm)
Marking	CE
[Uimp] Rated Impulse Withstand Voltage	4 kV
Current Consumption	50 mA
Net Weight	1.10 lb(US) (0.5 kg)
Height	10.71 in (272 mm)

## Environment

Standards	EN/IEC 60947-5-1 EN/IEC 60947-1
-----------	------------------------------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Certifications	UL
Protective Treatment	TC
Ambient Air Temperature For Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature For Operation	14...122 °F (-10...50 °C)
Electrical Shock Protection Class	Class I EN/IEC 61140
Ip Degree Of Protection	IP54 flat surface installation EN/IEC 60529

## Ordering and shipping details

Category	US100XV22617
Discount Schedule	00XV
Gtin	3606480072611
Returnability	No
Country Of Origin	ID

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.43 in (8.7 cm)
Package 1 Width	3.35 in (8.5 cm)
Package 1 Length	19.69 in (50.0 cm)
Package 1 Weight	23.92 oz (678.0 g)
Unit Type Of Package 2	S04
Number Of Units In Package 2	12
Package 2 Height	11.81 in (30.0 cm)
Package 2 Width	15.75 in (40.0 cm)
Package 2 Length	23.62 in (60.0 cm)
Package 2 Weight	20.70 lb(US) (9.388 kg)
Unit Type Of Package 3	P12
Number Of Units In Package 3	240
Package 3 Height	19.69 in (50.0 cm)
Package 3 Width	31.50 in (80.0 cm)
Package 3 Length	47.24 in (120.0 cm)
Package 3 Weight	440.40 lb(US) (199.76 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

# Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

## Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-------------------	--

China Rohs Regulation	<a href="#">China RoHS declaration</a>
-----------------------	--

Environmental Disclosure	<a href="#">Product Environmental Profile</a>
--------------------------	---

Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
------	--

Circularity Profile	<a href="#">End of Life Information</a>
---------------------	---


California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
---------------------------	---

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

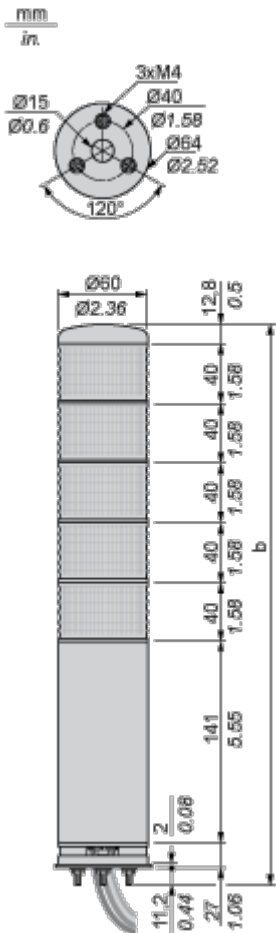

No. of illuminated units	b (mm)	b (in.)
1 stage	232	9.13
2 stages	272	10.71
3 stages	312	12.28
4 stages	352	13.86
5 stages	392	15.43

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

