

Product data sheet

Specifications



Harmony XVC, Monolithic precabled tower light, plastic, red orange green blue clear, Ø60, tube mounting, steady, IP23, 100...240 V AC

XVC6M5

! Discontinued

! Discontinued on: Jan 12, 2023

! End-of-service on: Mar 31, 2023

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range Of Product	Harmony XVC6
Product Or Component Type	Complete pre-wired monolithic tower light
Beacon Or Indicator Bank Unit Type	5 illuminated units
Sound Signalling	Without
Mounting Diamete	2.36 in (60 mm)
Component Name	XVC
Light Source	LED steady red LED steady orange LED steady green LED steady blue LED steady clear
[Us] Rated Supply Voltage	100...240 V
Supply Circuit Type	AC

Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94-V0): top cover
Product Mounting	On support tube, 22 mm
Cable Cross Section	0.00 in² (0.33 mm²) 0.00 in² (0.83 mm²)
Awg Gauge	AWG 22 AWG 18
Cable Length	21.65 in (550 mm) 17.72 in (450 mm)
Marking	CE
[Uimp] Rated Impulse Withstand Voltage	4 kV
Current Consumption	90 mA
Net Weight	2.60 lb(US) (1.18 kg)
Height	29.91 in (759.8 mm)

Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	EN/IEC 60947-5-1 EN/IEC 60947-1
Product Certifications	UL
Protective Treatment	TC
Ambient Air Temperature For Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature For Operation	14...122 °F (-10...50 °C)
Electrical Shock Protection Class	Class I EN/IEC 61140
Ip Degree Of Protection	IP23 vertical surface installation EN/IEC 60529

Ordering and shipping details

Category	US100XV22617
Discount Schedule	00XV
Gtin	3606480072598
Returnability	No
Country Of Origin	JP

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.35 in (8.5 cm)
Package 1 Width	3.35 in (8.5 cm)
Package 1 Length	30.51 in (77.5 cm)
Package 1 Weight	3.25 lb(US) (1.472 kg)
Unit Type Of Package 2	S06
Number Of Units In Package 2	1
Package 2 Height	28.94 in (73.5 cm)
Package 2 Width	23.62 in (60.0 cm)
Package 2 Length	31.50 in (80.0 cm)
Package 2 Weight	31.91 lb(US) (14.472 kg)
Unit Type Of Package 3	P06
Number Of Units In Package 3	18
Package 3 Height	30.31 in (77.0 cm)
Package 3 Width	31.50 in (80.0 cm)
Package 3 Length	23.62 in (60.0 cm)
Package 3 Weight	77.15 lb(US) (34.996 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-------------------	--

China Rohs Regulation	China RoHS declaration
-----------------------	--

Environmental Disclosure	Product Environmental Profile
--------------------------	---

Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
------	--

Circularity Profile	End of Life Information
---------------------	---


California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
---------------------------	---

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

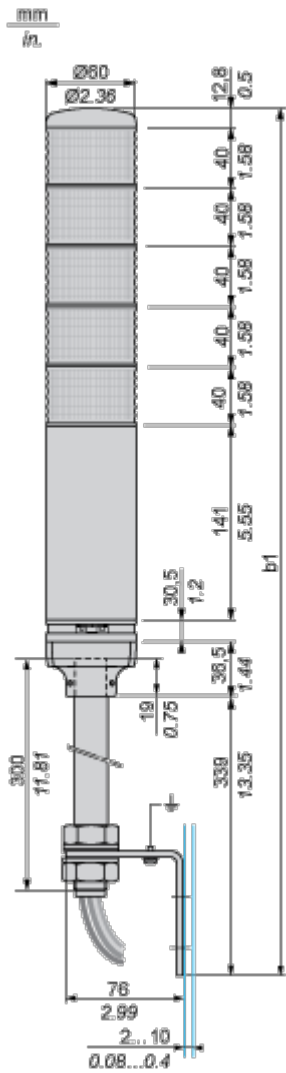

No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	599.8	23.61
2 stages	639.8	25.19
3 stages	679.8	26.76
4 stages	719.8	28.34
5 stages	759.8	29.91

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

