

# Product datasheet

Specifications



## BASE UNIT W/SCREW COVER+IP54 SEAL KIT

XVEC21P

⚠ Discontinued on: 01-Nov-2020

⚠ Discontinued

### Main

Range of product	Harmony XVE Optimum
Product or component type	Base unit kit
Kit composition	Base unit Screw fixing cover 5 seals for illuminated/audible unit 1 seal for fixing base XVEZ13
Component name	XVE

### Complementary

Mounting diameter	70 mm
Assembly style	Customer assembly
Marking	CE
Terminals description ISO n°1	(COM-3)PW (COM-1)PW (COM-4)PW (COM-2)PW (COM-5)PW (GND)GROUND
Net weight	0.12 kg

### Environment

Standards	EN/IEC 60947-1 EN/IEC 60947-5-1
Product certifications	CSA UL CCC
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...55 °C
Electrical shock protection class	Class I aluminium tube mounting conforming to IEC 61140 Class I plastic tube mounting conforming to IEC 61140
Protective treatment	TC
IP degree of protection	IP54 (outdoor) conforming to IEC 60529

### Contractual warranty

Warranty	18 months
----------	-----------


Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Dimensions Drawings

Indicator Bank

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

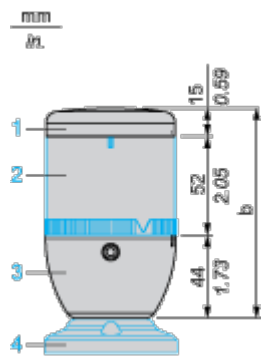

- (1)

Cover (supplied with base unit)
- (2)

Illuminated units XVEC•• or audible unit XVEC9•, to be ordered separately
- (3)

Base unit
- (4)

Fixing base, to be ordered separately

Number of units (ref. 2)	b in mm	b in in.
1 unit	111	4.37
2 units	163	6.42
3 units	215	8.46
4 units	267	10.51
5 units	319	12.56

Connections and Schema

Indicator Bank

---

Wiring Diagram

