

Product datasheet

Specifications



BLUE LENS INTEGRAL FLASHING LED 120VAC

XVEC5G6

⚠ Discontinued on: 30 Jun 2015

⚠ End-of-service on: 31 Dec 2015

⚠ Discontinued

EAN Code: 3389110661927

Main

Range of product	Harmony XVE Optimum
Product or component type	Indicator bank
Beacon or indicator bank unit type	Illuminated unit
Signalling type	Flashing
Component name	XVE
Light source	Integral LED, blue
Bulb type	LED
[Us] rated supply voltage	120 V AC

Complementary

Mounting diameter	70 mm
Assembly style	Customer assembly
Connections - terminals	Screw clamp terminals, <= 1 x 1.5 mm ² with cable end
Marking	CE
Short-circuit protection	0.16 A
[Ui] rated insulation voltage	250 V conforming to IEC 60947-1
Nominal voltage limit	0.85...1.1 Un conforming to IEC 60947-5-1
Current consumption	< 25 mA
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 60947-1
Luminance	800 cd/m ²
Flashing frequency	1 Hz
CAD overall width	70 mm
CAD overall height	52 mm
CAD overall depth	70 mm
Net weight	0.077 kg

Environment

Standards	EN/IEC 60947-1 EN/IEC 60947-5-1
-----------	------------------------------------

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product certifications	CSA UL CCC
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...55 °C
Electrical shock protection class	Class I aluminium tube mounting conforming to IEC 61140 Class I plastic tube mounting conforming to IEC 61140
Protective treatment	TC
IP degree of protection	IP40 any position except vertical position conforming to IEC 60529 IP42 vertical position conforming to IEC 60529

Contractual warranty


Warranty	18 months
----------	-----------

Dimensions Drawings

Indicator Bank

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

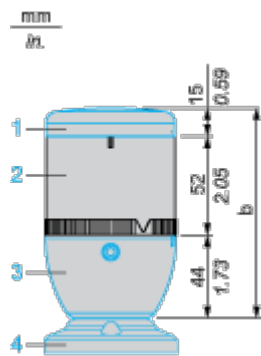

- (1) Cover (supplied with base unit XVEC21/C21P)
- (2) Illuminated or audible unit
- (3) Base unit XVEC21/C21P, to be ordered separately
- (4) Fixing base, to be ordered separately

Number of units (ref. 2)	b in mm	b in in.
1 unit	111	4.37
2 units	163	6.42
3 units	215	8.46
4 units	267	10.51
5 units	319	12.56