

Product datasheet

Specifications



SOUNDER UNIT 230V

XVEC9M

! Discontinued on: 30 Jun 2015

! End-of-service on: 31 Dec 2015

EAN Code: 3389110665055

! Discontinued

Main

Range of product	Harmony XVE Optimum
Product or component type	Indicator bank
Beacon or indicator bank unit type	Audible unit
Signalling type	Continuous buzzer, single tone
Component name	XVE
[Us] rated supply voltage	230...240 V AC

Complementary

Mounting diameter	70 mm
Assembly style	Customer assembly
Connections - terminals	Screw clamp terminals, <= 1 x 1.5 mm ² with cable end
Marking	CE
Current consumption	< 25 mA
Fundamental frequency	2.6 kHz
CAD overall width	70 mm
CAD overall height	52 mm
CAD overall depth	70 mm
Net weight	0.09 kg

Environment

Noise level	85 dB at 1 m
Standards	EN/IEC 60947-1 EN/IEC 60947-5-1
Product certifications	CCC UL CSA
Ambient air temperature for operation	-40...70 °C
Ambient air temperature for storage	-25...55 °C
Electrical shock protection class	Class I aluminium tube mounting conforming to IEC 61140 Class I plastic tube mounting conforming to IEC 61140
Protective treatment	TC

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

IP degree of protection	IP40 any position except vertical position conforming to IEC 60529 IP42 vertical position conforming to IEC 60529
--------------------------------	----------------------------------------------------------------------------------------------------------------------

Contractual warranty


Warranty	18 months
-----------------	-----------

Dimensions Drawings

Indicator Bank

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

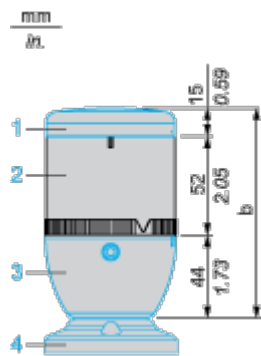

- (1) Cover (supplied with base unit XVEC21/C21P)
- (2) Illuminated or audible unit
- (3) Base unit XVEC21/C21P, to be ordered separately
- (4) Fixing base, to be ordered separately

Number of units (ref. 2)	b in mm	b in in.
1 unit	111	4.37
2 units	163	6.42
3 units	215	8.46
4 units	267	10.51
5 units	319	12.56