Product data sheet

Specifications

Green Premium™

Pre assembled USB programmable tower lights, Harmony XVGU, multi color, 60mm, steady flashing LED, buzzer

XVGU3SHAV

Product availability: Stock - Normally stocked in distribution facility

Price*: 115.00 USD

Main

Range Of Product	Harmony XVGU
Product Or Component Type	USB configurable monolithic tower light
Beacon Or Indicator Bank Unit Type	3 illuminated units
Sound Signalling	Buzzer
Mounting Diamete	2.4 in (60 mm)
Component Name	XVGU
Light Source	LED steady or flashing multi-colour
Indicator Bank Base Type	Base with integrated buzzer
Noise Level	85 dB 2 tone buzzer)1 m

Complementary

Material	PC: globe
Device Mounting	Tube mounting with fixing plate
Light Block Color	Clear/clear/clear
[Us] Rated Supply Voltage	5 V DC
Connector Type	USB type A female
Current Consumption	400 mA
Sound Frequency	3800 Hz 2700 Hz
Power Consumption In W	2 W
Flashing Frequency	2 Hz flashing LED unit 1 Hz flashing LED unit
Product Compatibility	Vijeo Designer 4.6 indoor use only HMIGTO XBTGT.... XBTGK.... XBTGC1. XBTGC2. XBTGH
Net Weight	0.7 lb(US) (0.3 kg)

Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Life Is On | **Schneider Electric**

Standards	IEC 61000-6-2
	IEC 61000-6-4

Product Certifications	GOST
	CE
	UL 508
	cUL
	RCM

Ambient Air Temperature For Storage	-31…158 °F (-35…70 °C)

Ambient Air Temperature For Operation	32…131 °F (0…55 °C)

Electrical Shock Protection Class	Class I

Ip Degree Of Protection	IP54

Ordering and shipping details

Category	US100XV22618

Discount Schedule	00XV

Gtin	3606480530937

Returnability	Yes

Country Of Origin	ID

Packing Units

Unit Type Of Package 1	PCE

Number Of Units In Package 1	1

Package 1 Height	3.2 in (8.2 cm)

Package 1 Width	5.1 in (13.0 cm)

Package 1 Length	16.3 in (41.5 cm)

Package 1 Weight	15.9 oz (450.0 g)

Unit Type Of Package 2	P06

Number Of Units In Package 2	35

Package 2 Height	31.5 in (80 cm)

Package 2 Width	31.5 in (80 cm)

Package 2 Length	23.6 in (60 cm)

Package 2 Weight	63.38 lb(US) (28.75 kg)

Contractual warranty

Warranty	18 months

Sustainability Green Premium™

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO_2 products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >

Transparency   RoHS/REACh

Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information   Yes

Certifications & Standards
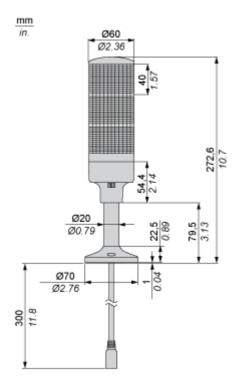
Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	No need of specific recycling operations
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions

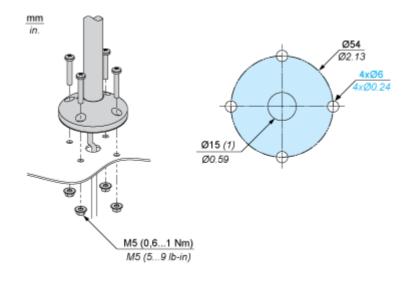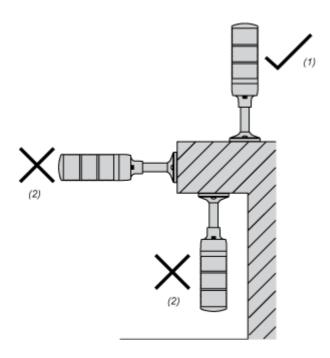**Tube Mounting with Fixing Plate**

Mounting and Clearance

Mounting on Horizontal Support for Tube Mounting with Fixing Plate

mm
in.

Ø54
Ø2.13

4xØ6
4xØ0.24

Ø15 (1)
Ø0.59

M5 (0,6...1 Nm)
M5 (5...9 lb-in)

(1)   Cable outlet

Mounting Orientation

　　　Choose a flat surface with enough strength and with little vibration for installation.Mount this product according to the figure to maintain IP characteristics.

(1)　OK

(2)　NO