## **Connecting Cables for Connector-Terminal Block Conversion Units**

# XW2Z

CSM\_XW2Z\_DS\_E\_3\_1

Connect Connector-Terminal Block Conversion Units (XW2□) to I/O Units for Programmable Controllers with one touch.



## **Ordering Information**

For 32-point, Connector-type I/O Units for Programmable Controllers

XW2Z-□□□A


(For XW2D-20G6/XW2B-20G□/-40G5-T/-20G5-D/XW2C-20G5-IN16/20G6-IO16/XW2E-20G5-IN16/XW2F-20G7-IN16/-OUT16/XW2N-20G8-IN16)

Cable length L (m) *	Model
0.5	XW2Z-050A
1.0	XW2Z-100A
1.5	XW2Z-150A
2.0	XW2Z-200A
3.0	XW2Z-300A
5.0	XW2Z-500A
10.0	XW2Z-010A
15.0	XW2Z-15MA
20.0	XW2Z-20MA

**XW2Z- AU** (For XW2D-20C6)

Model
XW2Z-050AU
XW2Z-100AU
XW2Z-150AU
XW2Z-200AU
XW2Z-300AU
XW2Z-500AU

<sup>\*</sup>Cable length L (m)



# For 32-point, Connector-type I/O Units (Group 2) for Programmable Controllers For 64-point, Connector-type I/O Units for Programmable Controllers

**XW2Z-**□□□**B** (For XW2D-40G6/XW2B-40G□)


Туре	Cable length L (m) *	Model
	0.5	XW2Z-050B
	1.0	XW2Z-100B
	1.5	XW2Z-150B
	2.0	XW2Z-200B
Normal wiring	3.0	XW2Z-300B
	5.0	XW2Z-500B
	10.0	XW2Z-010B
	15.0	XW2Z-15MB
	20.0	XW2Z-20MB
	0.5	XW2Z-050B-R1
	1.0	XW2Z-100B-R1
Reverse wiring	1.5	XW2Z-150B-R1
	2.0	XW2Z-200B-R1
	3.0	XW2Z-300B-R1
	5.0	XW2Z-500B-R1

Туре	Cable length L (m) *	Model
	0.5	XW2Z-050BU
	1.0	XW2Z-100BU
Normal	1.5	XW2Z-150BU
wiring	2.0	XW2Z-200BU
	3.0	XW2Z-300BU
	5.0	XW2Z-500BU

**XW2Z- B-A** (For XW2F-40G7-IN32)

Type	Cable length L (m) *	Model
	1.0	XW2Z-100B-A
	1.5	XW2Z-150B-A
Normal wiring	2.0	XW2Z-200B-A
9	3.0	XW2Z-300B-A
	5.0	XW2Z-500B-A

<sup>\*</sup>Cable length L (m)




#### **XW2Z-** Grov XW2F-40G7-OUT32)

Туре	Cable length L (m) *	Model
	1.0	XW2Z-100B-B
	1.5	XW2Z-150B-B
Normal wiring	2.0	XW2Z-200B-B
9	3.0	XW2Z-300B-B
	5.0	XW2Z-500B-B


# For 32-point, Connector-type Input Units (Group 2) for Programmable Controllers For 64-point, Connector-type Input Units for Programmable Controllers XW2Z-□□□D

Cable length L (m) *		Model
<b>(A</b> )	B	Wodel
1.0	0.75	XW2Z-100D
1.5	1.25	XW2Z-150D
2.0	1.75	XW2Z-200D
3.0	2.75	XW2Z-300D
5.0	4.75	XW2Z-500D
10.0	9.75	XW2Z-010D
15.0	14.75	XW2Z-15MD
20.0	19.75	XW2Z-20MD




# 20-pole Cable with Discrete-wire Press-fit Terminals XW2Z-□□□F

Cable length L (m) *	Model
1.0	XW2Z-100F
1.5	XW2Z-150F
2.0	XW2Z-200F
3.0	XW2Z-300F
5.0	XW2Z-500F
10.0	XW2Z-010F
15.0	XW2Z-15MF
20.0	XW2Z-20MF



#### For 32-point, Connector-type Output Units (Group 2) for Programmable Controllers For 64-point, Connector-type Output Units for Programmable Controllers XW2Z-□□□L


Cable length L (m) *		Model
(A)	B	iwiodei
1.0	0.75	XW2Z-100L
1.5	1.25	XW2Z-150L
2.0	1.75	XW2Z-200L
3.0	2.75	XW2Z-300L
5.0	4.75	XW2Z-500L
10.0	9.75	XW2Z-010L
15.0	14.75	XW2Z-15ML
20.0	19.75	XW2Z-20ML



#### For 96-point, Connector-type I/O Units for Programmable Controllers

XW2Z-DDH-1 (For CS1-series I/O Unit Connection)

Special Connecting Cables *		
Cable length L (m)	Model	
0.5	XW2Z-050H-1	
1.0	XW2Z-100H-1	
1.5	XW2Z-150H-1	
2.0	XW2Z-200H-1	
3.0	XW2Z-300H-1	
5.0	XW2Z-500H-1	
7.0	XW2Z-700H-1	
10.0	XW2Z-010H-1	
1.0	XW2Z-100H-1G	
1.5	XW2Z-150H-1G	
2.0	XW2Z-200H-1G	
3.0	XW2Z-300H-1G	
5.0	XW2Z-500H-1G	




\*Up to two cables required for each Programmable Controller I/O Unit.

Note: CS1 signal names connected to the XW2B/D are different for the XW2Z-□□□H-□ and the XW2Z-□□□H-□G.

Refer to the I/O Signal Tables on page 9.

#### XW2Z-DDH-2 (For CS1-series I/O Unit Connection)

	Special Connecting Cables *	
Cable length L (m)		Model
<b>(A</b> )	<b>B</b>	Model
1.0	0.75	XW2Z-100H-2
1.5	1.25	XW2Z-150H-2
2.0	1.75	XW2Z-200H-2
3.0	2.75	XW2Z-300H-2
5.0	4.75	XW2Z-500H-2
10.0	9.75	XW2Z-010H-2
1.0	0.75	XW2Z-100H-2G
1.5	1.25	XW2Z-150H-2G
2.0	1.75	XW2Z-200H-2G
3.0	2.75	XW2Z-300H-2G
5.0	4.75	XW2Z-500H-2G



\*Up to two cables required for each Programmable Controller I/O Unit.


Note: CS1 signal names connected to the XW2B/D are different for the XW2Z-□□□H-□ and the XW2Z-□□□H-□G. Refer to the I/O Signal Tables on page 9.

#### XW2Z-DDH-3 (For CS1-series I/O Unit Connection)

Special Connecting Cables *				
Model	Cable length L (m)			
Wodel	©	B	<b>(A</b> )	
XW2Z-100H-3	1.0	0.75	1.0	
XW2Z-150H-3	1.5	1.25	1.5	
XW2Z-200H-3	2.0	1.75	2.0	
XW2Z-300H-3	3.0	2.75	3.0	
XW2Z-500H-3	5.0	4.75	5.0	
XW2Z-010H-3	10.0	9.75	10.0	

*U	o to tw	o cables	required f	or each	Programmable	Controller	I/O Unit.

#### \*Cable length L (m)



Linear lengths (not including bends)

# For 32-point, MIL Connector-type I/O Units for Programmable Controllers xw2z- $\square\square\square K$


Cable length L (m) *	Model
0.25	XW2Z-C25K
0.5	XW2Z-C50K
1.0	XW2Z-100K
1.5	XW2Z-150K
2.0	XW2Z-200K
3.0	XW2Z-300K
5.0	XW2Z-500K



#### $XW2Z-\square\square\square N$

Cable length L (m) *		Model
<b>(A</b> )	B	Wodel
1.0	0.75	XW2Z-100N
1.5	1.25	XW2Z-150N
2.0	1.75	XW2Z-200N
3.0	2.75	XW2Z-300N
5.0	4.75	XW2Z-500N
10.0	9.75	XW2Z-010N
15.0	14.75	XW2Z-15MN
20.0	19.75	XW2Z-20MN





#### $XW2Z-\Box\Box\Box X$

Cable length L (m) *	Model
0.5	XW2Z-C50X
1.0	XW2Z-100X
2.0	XW2Z-200X
3.0	XW2Z-300X
5.0	XW2Z-500X
10.0	XW2Z-010X

#### \*Cable length L (m)



## **Ratings and Specifications**

Rated current	1 A
Rated voltage	125 VAC 24 VDC
Contact resistance	20 mΩ max. (at 20 mV, 100 mA max.) *1
Insulation resistance	100 MΩ min. (at 500 VDC)
Dielectric strength	500 VAC for 1 min (leakage current: 1 mA max.) *2
Ambient operating temperature	−25 to 80°C

<sup>\*1.</sup> Contact resistance for the Connector.
\*2. Dielectric strength for the Connector.

## **Materials and Finish**


Item	Pa	art name		Materials and Finish
		Housing		Fiber-glass reinforced PBT resin (UL94V-0)/black
	XG4M-2030	Cover		Fiber-glass reiniorced FBT TesiiT (OL94V-0)/black
	XG4M-4030	Contacts	Mating end	Phosphor bronze/nickel base, 0.15-µm gold plating
		Contacts	Press-fit end	Phosphor bronze/nickel base, 2.0-µm tin plating
Connectors	XG4T-2004/4004	Strain Relief		Fiber-glass reinforced PBT resin (UL94V-0)/black
		Housing		Polyester resin (UL94V-0)/black
	FCN-367J024-AU/F * FCN-367J040-AU/F	Contacts	Mating end	Copper alloy/gold plated
			Press-fit end	Copper alloy/tin plated
	Connecting screw		crew	Steel/nickel plated
Cable	UL2464 Interface Cable	UL2464 Interface Cable		AWG28 or the equivalent
Crimp terminal	Forked crimp terminal			1.25 Y AS 3.5 or the equivalent

Note: These housings, contacts, and connecting screws are made by Fujitsu.


#### For 32-point, Connector-type I/O Units for Programmable Controllers

XW2Z-\\_\\_\A (For XW2D-20G6/XW2B-20G\\_/-40G5-T/-20G5-D/ XW2C-20G5-IN16/20G6-IO16/XW2E-20G5-IN16/ XW2F-20G7-IN16/-OUT16/XW2N-20G8-IN16) **XW2Z-**□□**AU** (For XW2D-20C6)










For 32-point, Connector-type I/O Units (Group 2) for Programmable Controllers For 64-point, Connector-type I/O Units for Programmable Controllers


**XW2Z-**□□□**B** (For XW2D-40G6/XW2B-40G□)








#### Reverse wiring



#### XW2Z- BU (For XW2D-40C6)







#### **XW2Z-**□□□**B-A** (For XW2F-40G7-IN32)





N367J040	-AU/F	XG4M-403	0-7
B20		_ 1	
B19		2	
B18		3	
B17		- 5	
B16		7	
B15		9	
B14		11	
B13		13	
B12		15	
B11		17	
B10		19	
B9		4	
B8		6	
B7		8	
B6		10	
B5		12	
B4		14	
В3		16	
B2		18	
B1		20	
A20		21	
A19		22	
A18		23	
A17		25	
A16		27	
A15		29	
A14		31	
A13		33	
A12		35	
A11		37	
A10		39	
A9		24	
A8		26	
A7		28	
A6		30	
A5		32	
A4		34	
A3		36	
A2		38	
A1		40	

#### **XW2Z**-□□□B-B (For XW2F-40G7-OUT32)

# Wiring Diagram FCN367J040-AU/F B20 B19 B18 B17 B16

		·			
FCN367		-AU/F	XG	4M-403	30-T
	320			1	
	319			3	
	318			5	
	317			7	
	316			9	
	315			11	
	314			13	
- 1	313			15	
1	312			17	
- 1	311			19	
1	310			2	
	B9			4	
	B8			6	
	B7			8	
	B6			10	
	B5			12	
	B4			14	
	B3			16	
	B2			18	
	B1			20	
	420			21	
7	419			23	
-	418			25	
-	417			27	
,	416			29	
	415			31	
	414			33	
	413			35	
	412			37	
	411			39	
	410			22	
	A9			24	

40

A8 A7 A6 A5 A4 A3 A2


A1

# For 32-point, Connector-type Input Units (Group 2) for Programmable Controllers For 64-point, Connector-type Input Units for Programmable Controllers


#### XW2Z-□□□D



#### **Wiring Diagram**

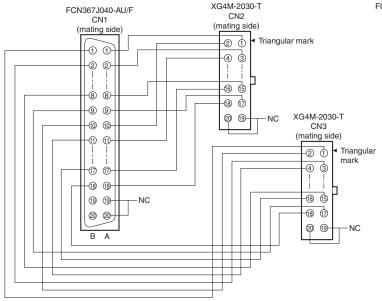

Note: G79-I□C-□ Connecting Cables for the G7TC have different wiring and cannot be used with the XW2C.

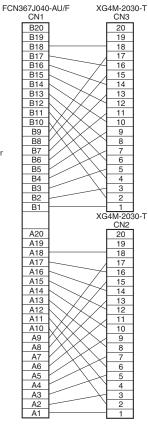


#### 20-pole Cable with Discrete-wire Press-fit Terminals

#### XW2Z-□□□F



#### **Wiring Diagram**



#### **Connector Pin No. Table**


Forked terminal	No. of cores	Insulation color	Dot marks	Dot color	Connector pin No.
1	1	Blue		Red	1⊲
2	ı	Blue		Black	2
3	2	Pink		Red	3
4	2	Pink		Black	4
5	3	Green		Red	5
6	3	Green		Black	6
7	4	Orange		Red	7
8	4	Orange		Black	8
9	5	Gray		Red	9
10	5	Gray		Black	10
11	6	Blue		Red	11
12	0	Blue		Black	12
13	7	Pink		Red	13
14	,	Pink		Black	14
15	8	Green		Red	15
16	0	Green		Black	16
17	9	Orange		Red	17
18	9	Orange		Black	18
19	10	Gray		Red	19
20	10	Gray		Black	20

For 32-point, Connector-type Output Units (Group 2) for Programmable Controllers For 64-point, Connector-type Output Units for Programmable Controllers

#### XW2Z-□□□L




#### **Wiring Diagram**

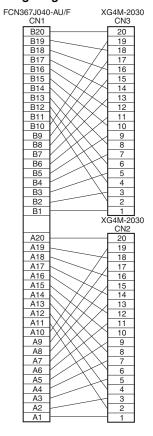

## For 96-point, Connector-type I/O Units for Programmable Controllers

### XW2Z-UUH (For CS1-series I/O Unit Connection)

XW2Z-□□H-1 XW2Z-□□H-2 XW2Z-□□H-3







#### I/O Signal Tables (Example Using CN1 on CS1W-OD291)

XW2Z-□□□H-□	Connecting	Cables
~ * * * * * * * * * * * * * * * * * * *	COLLICATION	Cubics

XVV22	mouning easies
XW2Z-□□□H-3	XW2□-20G□   Word N (CN2)   Word N+1 (CN3)   Word N+2 (CN4)     0 1 2 3 4 5 6 7 COM NC
XW2Z-□□□H-2	XW2□-40G□  Word N (CN2) 0 1 2 3 4 5 6 7 COM NC 0 1 2 3 4 5 6 7 COM NC  ①③⑤⑦⑨⑪⑬ೀ♡⑫❷❷❷❷❷��������������������������������
XW2Z-□□□H-1	XW2B-60G□         Word N (CN2)       Word N+1 (CN2)       Word N+2 (CN2)         0 1 2 3 4 5 6 7 COM 0 1 2 3 4 5 6 7 COM 0 1 2 3 4 5 6 7 COM 0 1 2 3 4 5 6 7 COM NC

VW27-DDDLDG/C	G79-000C-000-000	Connecting Cables
XVV2Z-UUUN-UG/U	ス/Ⴘーニニニニ゙。	Connecting Caples


AW2Z-UUR-UG/G79-UUC-UUL-UUL Connecting Cables					
	XW2□-20G□				
G79-00C-0000	Word N (CN2)	Word N+1 (CN3)	Word N+2 (CN4)		
	+V NC 15 14 13 12 11 10 9 8	+V NC 15 14 13 12 11 10 9 8	+V NC 15 14 13 12 11 10 9 8		
	035790000	135791131579	035790000		
	246802468				
	NC COM 7 6 5 4 3 2 1 0	NC COM 7 6 5 4 3 2 1 0	NC COM 7 6 5 4 3 2 1 0		
XW2Z-□□□H-2G	XW2□-40G□		XW2□-20G□		
	Word N (CN2)	Word N+ 1 (CN2)	Word N +2 (CN3)		
	+V NC 15 14 13 12 11 10 9 8 +V		+V NC 15 14 13 12 11 10 9 8		
	0357900000		0357903579		
			246800000000		
	NC COM 7 6 5 4 3 2 1 0 N	C COM 7 6 5 4 3 2 1 0	NC COM 7 6 5 4 3 2 1 0		
XW2Z-□□□H-1G	XW2B-60G□				
	Word N (CN2)	Word N+1 (CN2) Wo	ord N+2 (CN2)		
	+V NC 15 14 13 12 11 10 9 8 +V NC 15 14 13 12 11 10 9 8 +V NC 15 14 13 12 11 10 9 8				
	0 3 6 7 9 0 0 0 0 0 0 0 2 2 2 2 2 2 3 3 3 3 3 3 3				
	2 4 6 8 10 12 4 16 18 29 24 29 29 29 29 39 29 39 39 39 49 49 49 49 49 59 59 59 59 59 59 59				
	NC COM 7 6 5 4 3 2 1 0 NC	C COM 7 6 5 4 3 2 1 0 NC CC	OM 7 6 5 4 3 2 1 0		

Note: The XW2Z- $\Box\Box$ H- $\Box$ G I/O signal arrangement is oriented the same as the Connector Cable for the G79 I/O Relay Terminal.


#### For 32-point, MIL Connector-type I/O Units for Programmable Controllers

 $XW2Z-\Box\Box\Box N$ 

#### $XW2Z-\Box\Box\Box K$ **Wiring Diagram** XG4M-4030-T (mating side) XG4M-4030-T (mating side) Triangular mark 39 40 21 37 38 4 3 21 22 -20 (19 19 20 -22 21 3 4 -38 37 40 39 (1) (2) Triangular mark Note: Connector pins are connected 1-to-1 so that pin numbers correspond.

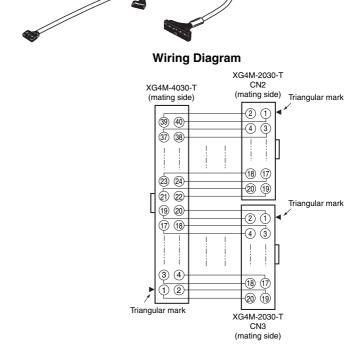

#### $XW2Z-\Box\Box\Box X$

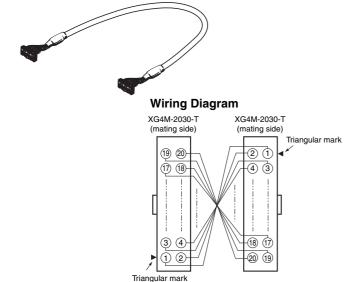

Note: Connector pins are connected 1-to-1 so that pin numbers correspond.

#### Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments

#### Warranty and Limitations of Liability

#### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

#### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

#### **Application Considerations**

#### **SUITABILITY FOR USE**

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

#### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

#### **Disclaimers**

#### **CHANGE IN SPECIFICATIONS**

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

#### **DIMENSIONS AND WEIGHTS**

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

#### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

#### **ERRORS AND OMISSIONS**

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2012.11

In the interest of product improvement, specifications are subject to change without notice.



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Omron:

XW2Z-150L XW2Z-C50X XW2Z-100X XW2Z-300L XW2Z-150H-2 XW2Z-010X XW2Z-100L XW2Z-100N XW2Z-300X XW2Z-150H-3 XW2Z-500X XW2Z-150H-1 XW2Z-200L XW2Z-200N XW2Z-C50K XW2Z-010D XW2Z-15MD