Specifications



Plastic flush mounting kit for legend 18x27 selector switch and ill.pushbutton

ZB5AZ026

Main

Range of product	Harmony XB5 Flush mounting kit	
product or component type		
Accessory / separate part categor	Mounting and fixing accessory	
Product compatibility	ZB5RZA0	
	ZB5AK	
	ZB5AD.9	
	ZB5AA.6	
	ZB5AW	
	ZB5RTA	
	ZB5AJ	
	ZB5AH3	
	ZB5AD	
	ZB5AD.8	
Accessory / separate part Selector switch with high bezel destination Illuminated push-button with high bezel		

Complementary

Colour	Black	
IP degree of protection	IP66 (front face) conforming to IEC 60529 IP69 (front face) conforming to IEC 60529 IP69K (front face) conforming to DIN 40050-9	
IK degree of protection	IK03 conforming to IEC 50102	
Mounting diameter	30.5 mm	
Quantity per set	Set of 1	

Packing Units

-	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.500 cm
Package 1 Width	4.300 cm
Package 1 Length	5.200 cm
Package 1 Weight	17.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	80
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm

Excluding VAT, FCA Jabal Ali & are subject to change - check with your local distributor.

Package 2 Weight

1.750 kg

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >


Guide to assess a product's sustainability >

Well-being performance

🕑 R	each Free Of Svhc	
🕑 То	oxic Heavy Metal Free	
🕗 м	lercury Free	
🕑 R	ohs Exemption Information	Yes
Reach	Regulation	REACh Declaration
Eu Roh	s Directive	Compliant EU RoHS Declaration
China f	Rohs Regulation	China RoHS declaration
Weee		The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions with Flush Mounting Kit

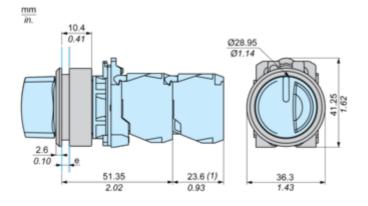

 ${\bf e}$: Clamping thickness : 1 to 3.5 mm / 0.04 to 0.14 in. (1) Additional row of contacts or double contact

Product datasheet

Mounting and Clearance

Panel Cut-Out and Mounting

