Specifications





Harmony XB5, Antimicrobial Flush mounted push button head, plastic, projecting, white, 30mm, spring return, unmarked, dark grey bezel

ZB5FL1

Product availability: Stock - Normally stocked in distribution facility

Price*: 13.30 USD

Main

Range of ProductHarmony XB5Product or Component TypeHead for non-illuminated push-buttonDevice short nameZB5Product CompatibilityZBYF ZBZF32 ZB5AZBezel materialDark grey plasticMounting diameter1.2 in (30.5 mm)Head typeBuilt-in-flush	
Device short name ZB5 Product Compatibility ZBYF ZBZF32 ZBZF33 ZB5AZ Bezel material Dark grey plastic Mounting diameter 1.2 in (30.5 mm)	
Product Compatibility ZBYF ZBZF32 ZBZF33 ZB5AZ Dark grey plastic Mounting diameter 1.2 in (30.5 mm)	
ZBZF32 ZBZF33 ZB5AZ Bezel material Dark grey plastic Mounting diameter 1.2 in (30.5 mm)	
Mounting diameter 1.2 in (30.5 mm)	
Head type Built-in-flush	
Sale per indivisible quantity 1	
Shape of signaling unit head Round	
Type of operator spring return	
Operator profile White projecting, unmarked	

Complementary

CAD overall width	1.5 in (37 mm)
CAD overall height	1.5 in (37 mm)
CAD overall depth	1.3 in (32 mm)
Net Weight	0.068 lb(US) (0.031 kg)
Mechanical durability	1000000 cycles
Electrical composition code	C1 9 single front mounting C2 9 single and double front mounting C11 3 single front mounting C15 1 single front mounting SF1 3 single front mounting

Device presentation

Basic element

Environment

protective treatment	тн
Ambient Air Temperature for Storage	-40158 °F (-4070 °C)

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Ambient Air Temperature for Operation	-40158 °F (-4070 °C)
Overvoltage category	Class II IEC 60536
IP degree of protection	IP66 IEC 60529
	IP67 IEC 60529
	IP69 IEC 60529
	IP69K ISO 20653
	Type 13 UL 50 E
	Type 12 UL 50 E
	Type 4 UL 50 E
	Type 4X UL 50 E
Resistance to high pressure washer	1015.3 psi (7000000 Pa) 131 °F (55 °C) 0.1 m
IK degree of protection	IK03 conforming to IEC 50102
Standards	IEC 60947-5-1
	JIS C8201-5-1
	IEC 60947-1
	UL 508
	IEC 60947-5-4
	CSA C22.2 No 14
	JIS C8201-1
Product Certifications	UL Listed
	DNV
	CSA
	GL
	LROS (Lloyds register of shipping)
	BV
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27
	50 gn 11 ms) half sine wave acceleration IEC 60068-2-27
	25 gn 6 ms) 1000 shocks on each axis IEC 60068-2-27
Vibration resistance	5 gn 10500 Hz)IEC 60068-2-6
	2 mm peak to peak 210 Hz)IEC 60068-2-6

Ordering and shipping details

Category	US10CS222467
Discount Schedule	0CS2
GTIN	3606481340467
Returnability	Yes
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.10 in (5.33 cm)
Package 1 Width	1.70 in (4.32 cm)
Package 1 Length	2.20 in (5.59 cm)
Package 1 Weight	0.07 lb(US) (0.03 kg)

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance


Reach Free Of Svhc
Mercury Free
Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation	REACh Declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Circularity Profile	End of Life Information		
California Proposition 65	"WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov"		

Dimensions Drawings

Dimensions

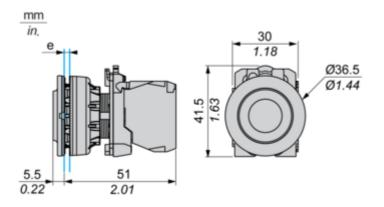


e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors



(1) Diameter on finished panel or support

(2) Ø30.75 mm recommended (Ø30.5 $_{0}^{+0.5}$) / Ø1.21 in. recommended (Ø1.20 in. $_{0}^{+0.0196}$)


				-
Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	40	1.57
By Faston connectors	45	1.77	40	1.57

Technical Description

Electrical Composition Corresponding to Code C1



Electrical Composition Corresponding to Code C2



Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Electrical Composition Corresponding to Code C15

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

Single contact



Double contact



Light block



Possible location



Technical Illustration

Dimensions

