

G3VM-61UR□/81UR□/101UR


MOS FET Relays VSON package with High Load voltage

World's smallest New VSON Package with High Load voltage

• Load voltage 60V/80V/100V

RoHS Compliant

Refer to "Common Precautions".

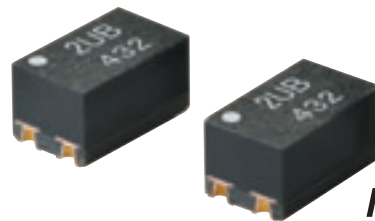


NEW

Note: The actual product is marked differently from the image shown here.

Application Examples

- Semiconductor test equipment
- Communication equipment
- Test & measurement equipment
- Data loggers

Package (Unit : mm, Average)



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load Voltage

6: 60V
8: 80V
10: 100V

2. Contact form

1: 1a (SPST-NO)

3. Package type

U: VSON 4 pin

4. Additional functions

R: Low On-resistance

5. Other informations

When specifications overlap, serial code is added in the recorded order.

Ordering Information

Package type	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tape cut		Packing/Tape & reel			
					Model	Minimum package quantity	Model	Minimum package quantity		
VSON4	1a (SPST-NO)	Surface-mounting Terminals	60V	120mA	G3VM-61UR1	1 pc.	G3VM-61UR1(TR05)	500 pcs.		
				400mA	G3VM-61UR		G3VM-61UR(TR05)			
			80V	120mA	G3VM-81UR		G3VM-81UR(TR05)			
				200mA	G3VM-81UR1		G3VM-81UR1(TR05)			
			100V	100mA	G3VM-101UR		G3VM-101UR(TR05)			

Note: When ordering tape packing, add "(TR05)" (500pcs/reel) to the model number.

Ask your OMRON representative for orders under 500 pcs. We can supply products with the tape already cut.

Tape-cut VSONs are packaged without humidity resistance. Use manual soldering to mount them.

Refer to common precautions.

* The AC peak and DC value are given for the load voltage and continuous load current.

Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	G3VM-61UR1	G3VM-61UR	G3VM-81UR	G3VM-81UR1	G3VM-101UR	Unit	Measurement conditions
Input	LED forward current	IF	30					mA	
	LED forward current reduction rate	$\Delta I_F / ^\circ\text{C}$	-0.3					mA/°C	Ta≥25°C
	LED reverse voltage	VR	5					V	
	Connection temperature	TJ	125					°C	
Output	Load voltage (AC peak/DC)	VOFF	60		80		100	V	
	Continuous load current (AC peak/DC)	Io	120	400	120	200	100	mA	
	ON current reduction rate	$\Delta I_O / ^\circ\text{C}$	-1.2	-4.0	-1.2	-2	-1	mA/°C	Ta≥25°C
	Pulse ON current	Iop	360	1200	360	600	300	mA	t=100ms, Duty=1/10
	Connection temperature	TJ	125					°C	
	Dielectric strength between I/O (See note 1.)	VI-O	300					Vrms	AC for 1 min
Ambient operating temperature		Ta	-40~+85					°C	With no icing or condensation
Ambient storage temperature		Tstg	-40~+125					°C	
Soldering temperature		-	260					°C	

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics (Ta = 25°C)

Item			Symbol	G3VM-61UR1	G3VM-61UR	G3VM-81UR	G3VM-81UR1	G3VM-101UR	Unit	Measurement conditions	
Input	LED forward voltage	V _F	Minimum	1.1					V	I _F =10mA	
			Typical	1.27							
			Maximum	1.4							
	Reverse current	I _R	Maximum	10					μA	V _R =5V	
	Capacity between terminals	C _T	Typical	30					pF	V=0, f=1MHz	
	Trigger LED forward current	I _{FT}	Typical	1	—		1	—	mA	I _O =100mA	
			Maximum	3							
Release LED forward current	I _{FC}	Minimum	0.1					mA	I _{OFF} =10μA		
Output	Maximum resistance with output ON	R _{ON}	Typical	10	1.0	7	6	8	Ω	I _F =5mA, t<1s, I _O =Continuous load current ratings	
			Maximum	15	1.5	12	8	14			
	Current leakage when the relay is open	I _{LEAK}	Maximum	1		0.02	1	0.2	nA	V _{OFF} =Load voltage ratings	
	Capacity between terminals	C _{OFF}	Typical	0.7	20	5	6.5	6	pF	V=0, f=100MHz, t<1s	
			Maximum	1.3	—	7	11	8			
	Capacity between I/O terminals		C _{I-O}	Typical	1					pF	f=1MHz, V _S =0V
	Insulation resistance between I/O terminals		R _{I-O}	Typical	10 ⁸					MΩ	V _{I-O} =500VDC, RoH≤60%
Turn-ON time		t _{ON}	Typical	0.05	—				ms	I _F =5mA, R _L =200Ω, V _{DD} =20V (See note 2.)	
			Maximum	0.2	0.5	0.5	0.4	0.3			
Turn-OFF time		t _{OFF}	Typical	0.015	—						
			Maximum	0.2	0.5	0.2	0.4	0.3			

Note: 2. Turn-ON and Turn-OFF Times



■Recommended Operating Conditions


For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-61UR1	G3VM-61UR	G3VM-81UR	G3VM-81UR1	G3VM-101UR	Unit	
Load voltage (AC peak/DC)	V _{DD}	Maximum	48		64		80	V	
Operating LED forward current	I _F	Minimum	5						mA
		Typical	7.5						
		Maximum	20						
Continuous load current (AC peak/DC)	I _O	Maximum	120	400	120	200	100		
Ambient operating temperature	T _a	Minimum	−20						°C
		Maximum	65						

Engineering Data


LED forward current vs. Ambient temperature

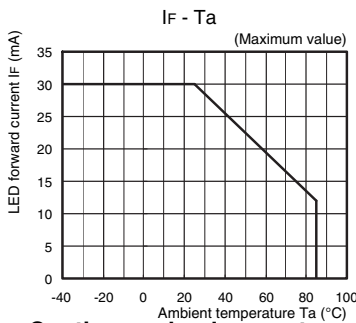


Continuous load current vs. On-state voltage




Trigger LED forward current vs. Ambient temperature

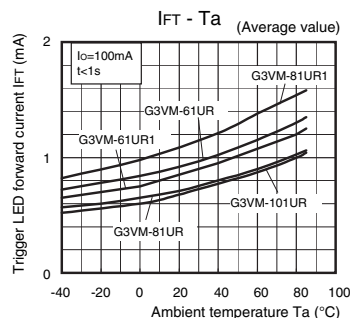


Turn ON, Turn OFF time vs. Ambient temperature

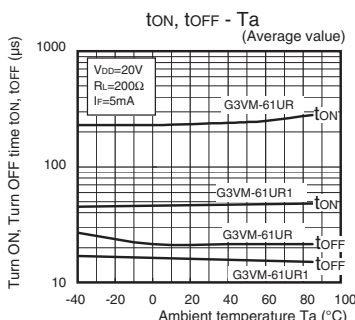


Current leakage vs. Ambient temperature

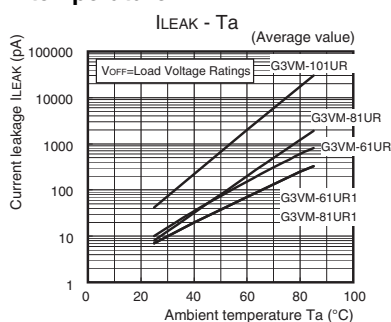


Continuous load current vs. Ambient temperature




G3VM-81UR/81UR1/101UR

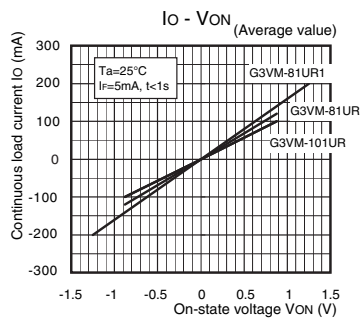


Turn ON, Turn OFF time vs. LED forward current

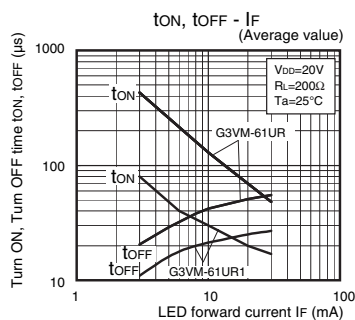


G3VM-81UR/81UR1/101UR

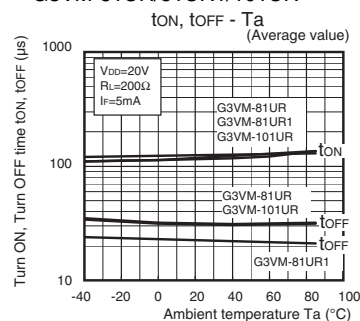


Output terminal capacitance vs. Load voltage




LED forward current vs. LED forward voltage

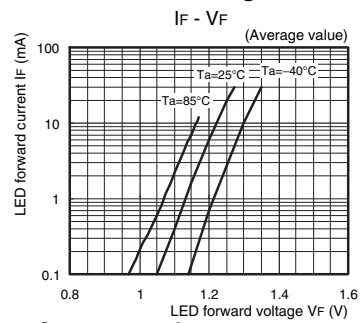


On-state resistance vs. Ambient temperature

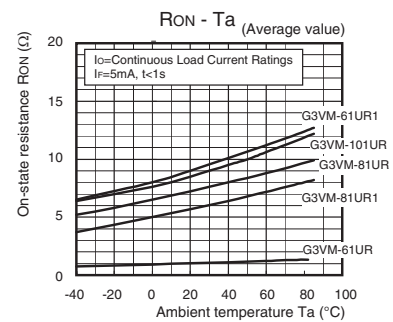

G3VM-81UR/81UR1/101UR

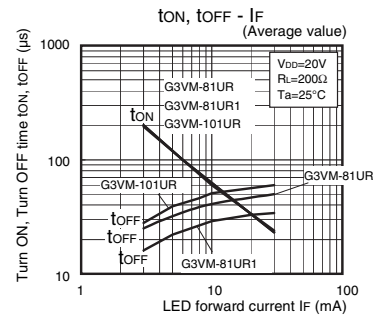


Current leakage vs. Load voltage

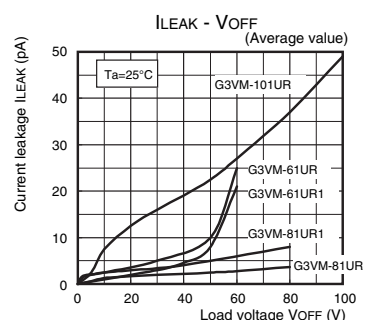

■Appearance / Terminal Arrangement / Internal Connections

■Appearance


VSON (Very Small Outline Non-leaded)
VSON4 pin



* Actual model name marking for each model

Model	Marking
G3VM-61UR1	6U1
G3VM-61UR	6U0
G3VM-81UR	8U0
G3VM-81UR1	8U1
G3VM-101UR	AU0

■Terminal Arrangement/Internal Connections (Top View)





Note: The actual product is marked differently from the image shown here.

■Dimensions (Unit: mm)


Surface-mounting Terminals

Weight: 0.01g

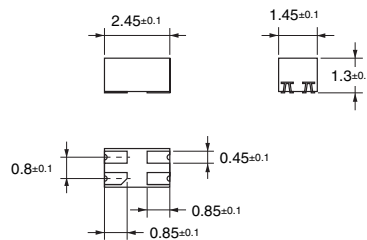

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Unless otherwise specified, the dimensional tolerance is ±0.1 mm.

Note: The actual product is marked differently from the image shown here.

■Approved Standards

Applying for UL recognition

■Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

Electronic and Mechanical Components Company

Contact: www.omron.com/ecb

Cat. No. K269-E1-03
0215(0814)(O)