


## Impulse Withstand Voltage as High as 10kV with 4kV Dielectric Strength: Ideal for Power Supply Switching



- Input and output (between coil and contacts) are completely separated, with impulse withstand voltage of 10,000 V.
- Insulation distance of 8 mm min. between coil and contacts satisfies the VDE Standard C/250 insulation requirements, and conforms to Electrical Appliance and Material Safety Law with dielectric strength of 4,000 VAC min. Standard model conforms to UL/CSA standards.
- VDE standard approved models are also available. Consult your Omron sales representative for availability.
- SPST-NO (1a) types conform to TV-8 rating, and DPST-NO (2a) types conform to TV-5 rating.
- Full-wave bridge rectifier compatible models are also available.

**RoHS Compliant**

### Model Number Legend

G4W-□-□□□□-□-□-□  
 1 2 3 4 5 6 7 8

#### 1. Number of poles

- 1: 1-pole/SPST-NO (1a)  
 2: 2-pole/DPST-NO (2a)

#### 2. Contact Form

- 1: SPST-NO (1a)  
 2: DPST-NO (2a)

#### 3. Contact Type

- 1: Single

#### 4. Enclosure rating

- 2: Unsealed

#### 5. Terminals

- P: Straight PCB

#### 6. Approved Standards

- US: UL, CSA

#### 7. TV Ratings

- TV5: TV-5  
 TV8: TV-8

#### 8. Classification

- None: Standard  
 Z : Full-wave rectifier

### Application Examples

- Power supplies

### Ordering Information

#### General-purpose Models (UL, CSA certified)

| Contact form   | SPST-NO (1a)     |                    | DPST-NO (2a)     |                    | Minimum packing unit |
|----------------|------------------|--------------------|------------------|--------------------|----------------------|
| Classification | Model            | Rated coil voltage | Model            | Rated coil voltage |                      |
| Standard       | G4W-1112P-US-TV8 | 12 VDC             | G4W-2212P-US-TV5 | 12 VDC             | 50 pcs/tray          |
|                |                  | 24 VDC             |                  | 24 VDC             |                      |
|                |                  | 100 VDC            |                  | 100 VDC            |                      |

Note: Contact your OMRON sales representative for VDE standard approved models and fully sealed models.

#### Full-wave Rectifier Models (UL, CSA certified)

| Contact form   | SPST-NO (1a)       |                    | DPST-NO (2a)       |                    | Minimum packing unit |
|----------------|--------------------|--------------------|--------------------|--------------------|----------------------|
| Classification | Model              | Rated coil voltage | Model              | Rated coil voltage |                      |
| Standard       | G4W-1112P-US-TV8-Z | 12 VDC             | G4W-2212P-US-TV5-Z | 12 VDC             | 50 pcs/tray          |
|                |                    | 24 VDC             |                    | 24 VDC             |                      |
|                |                    | 100 VDC            |                    | 100 VDC            |                      |

Note: When ordering, add the rated coil voltage to the model number.

Example: G4W-1112P-US-TV8 DC12

Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packing will be marked as □□ VDC.

## Ratings

### Coil

| Item          | Rated current (mA) | Coil resistance (Ω) | Must operate voltage (V) | Must release voltage (V) | Max. voltage (V) | Power consumption (mW) |
|---------------|--------------------|---------------------|--------------------------|--------------------------|------------------|------------------------|
| Rated voltage |                    |                     | % of rated voltage       |                          |                  |                        |
| 12 VDC        | 66.7               | 180                 | 80% max.                 | 10% min.                 | 130% (at 23°C)   | Approx. 0.8 W          |
| 24 VDC        | 33.3               | 720                 |                          |                          |                  |                        |
| 100 VDC       | 8                  | 12,500              |                          |                          |                  |                        |

- Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±15%.  
 2. The operating characteristics are measured at a coil temperature of 23°C.  
 3. The "Max. voltage" is the maximum voltage that can be applied to the relay coil.

### Contacts

| Item                   | Contact form                      | SPST-NO (1a)                       |                                   | DPST-NO (2a)                      |                                |
|------------------------|-----------------------------------|------------------------------------|-----------------------------------|-----------------------------------|--------------------------------|
|                        | Load                              | Resistive load<br>(cosφ = 1)       | Inductive load<br>(cosφ = 0.4)    | Resistive load<br>(cosφ = 1)      | Inductive load<br>(cosφ = 0.4) |
| Contact material       | Ag-Alloy (Cd free)                |                                    |                                   |                                   |                                |
| Rated load             | 15 A at 250 VAC<br>15 A at 24 VDC | 10 A at 250 VAC<br>7.5 A at 24 VDC | 10 A at 250 VAC<br>10 A at 24 VDC | 7.5 A at 250 VAC<br>5 A at 24 VDC |                                |
| Rated carry current    | 15 A                              |                                    | 10 A                              |                                   |                                |
| Max. switching voltage | 250 VAC, 125 VDC                  |                                    |                                   |                                   |                                |
| Max. switching current | 15 A                              |                                    | 10 A                              |                                   |                                |

## Characteristics


|                                             |                                                                                    |
|---------------------------------------------|------------------------------------------------------------------------------------|
| Contact resistance *1                       | 30 mΩ max.                                                                         |
| Operate time                                | 20 ms max.                                                                         |
| Release time                                | 5 ms max.                                                                          |
| Max. operating frequency                    | Mechanical: 18,000 operations/hr<br>Electrical: 1,800 operations/hr                |
| Insulation resistance *2                    | 100 MΩ max.                                                                        |
| Dielectric strength                         | Between coil and contacts: 4,000 VAC, 50/60 Hz for 1 min                           |
|                                             | Between contacts of the same polarity: 1,500 VAC, 50/60 Hz for 1 min               |
|                                             | Between contacts of different polarities: 2,000 VAC, 50/60 Hz for 1 min            |
| Impulse withstand voltage                   | Between coil and contacts: 10,000 V                                                |
| Insulation distance                         | Between coil and contacts: Clearance: 8 mm, Creepage: 8 mm                         |
| Vibration resistance                        | Destruction: 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude) |
|                                             | Malfunction: 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude) |
| Shock resistance                            | Destruction: 1,000 m/s <sup>2</sup>                                                |
|                                             | Malfunction: 150 m/s <sup>2</sup>                                                  |
| Durability                                  | Mechanical: 5,000,000 operations min. (at 18,000 operations/hr)                    |
|                                             | Electrical: 100,000 operations min. (rated load, at 1,800 operations/hr)           |
| Failure rate (P level) (reference value) *3 | 100 mA at 5 VDC                                                                    |
| Ambient operating temperature               | -25°C to 55°C (with no icing or condensation)                                      |
| Ambient operating humidity                  | 5% to 85%                                                                          |
| Weight                                      | Approx. 29 g                                                                       |

Note: The above values are initial values.


- \*1. The contact resistance was measured with 1 A at 5 VDC with a fall-of-potential method.  
 \*2. The insulation resistance was measured with a 500 VDC Megger Tester applied to the same parts as those for checking the dielectric strength.  
 \*3. This value was measured at a switching frequency of 120 operations/min.

## Engineering Data


### Maximum Switching Capacity SPST-NO (1a)




### DPST-NO (2a)




### Durability SPST-NO (1a) AC Load




### DPST-NO (2a) AC Load




### Durability SPST-NO (1a) DC Load




### DPST-NO (2a) DC Load



### Ambient Temperature vs. Maximum Coil Voltage




### Ambient Temperature vs. Must Operate and Must Release Voltage G4W-2212P-US-TV5



Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

### Shock Malfunction



G4W-1112P-US-TV8


Number of Relays: 5 pcs

Test Conditions: Shock is applied in ±X, ±Y, and ±Z directions three times each with and without energizing the Relays to check the number of contact malfunctions.


Standard value: 150 m/s<sup>2</sup>

■Dimensions


Standard model




This illustration is the G4W-2212P-US-TV5 model.

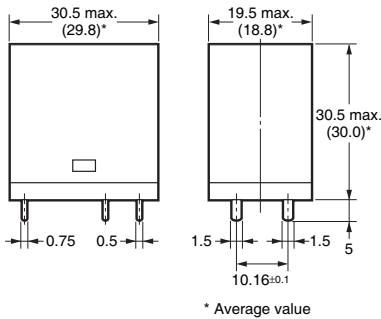



PCB Mounting Holes  
(BOTTOM VIEW) Tolerance: ±0.1 mm  
G4W-1112P-US-TV8(-Z)

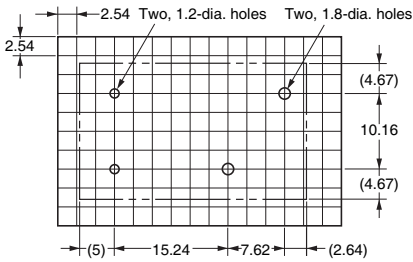

Terminal Arrangement/  
Internal Connections  
(BOTTOM VIEW)



G4W-2212P-US-TV5(-Z)

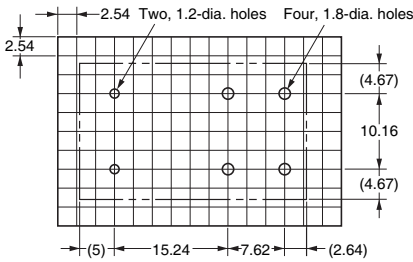

G  
4  
W

■Approved Standards

- The approval rating values for overseas standards are different from the performance values determined individually. Confirm the values before use.

UL Recognized: (File No. E41643)

| Model                      | Number of poles | Coil ratings           | Contact ratings                     | Number of test operations |
|----------------------------|-----------------|------------------------|-------------------------------------|---------------------------|
| G4W-1112( )<br>-US-TV8(-Z) | 1               | 12 to 100 VDC          | 15 A, 250 VAC (General Use) at 40°C | 6,000                     |
|                            |                 |                        | 15A, 24 VDC at 40°C                 |                           |
|                            |                 |                        | TV-8 at 40°C                        | 25,000                    |
|                            |                 |                        | 1/2HP, 125 VAC at 40°C              | 1,000                     |
|                            |                 |                        | 3/4HP, 240 VAC at 40°C              |                           |
|                            |                 |                        | 1HP, 250 VAC at 40°C                |                           |
| G4W-2212( )<br>-US-TV5(-Z) | 2               |                        | 15 A, 250 VAC (General Use) at 40°C | 6,000                     |
|                            |                 |                        | 15A, 36 VDC at 40°C                 |                           |
|                            |                 |                        | TV-5 at 40°C                        | 25,000                    |
|                            |                 |                        | 1/4HP, 125 VAC at 40°C              | 1,000                     |
|                            |                 |                        | 1/2HP, 250 VAC at 40°C              |                           |
|                            |                 |                        | 1/3HP, 125 VAC at 40°C              |                           |
|                            |                 | 1/4HP, 250 VAC at 40°C |                                     |                           |

CSA Certified: (File No. LR31928)

| Model                  | Number of poles | Coil ratings  | Contact ratings                                     | Number of test operations |
|------------------------|-----------------|---------------|-----------------------------------------------------|---------------------------|
| G4W-1112( )-US-TV8(-Z) | 1               | 12 to 100 VDC | 15 A, 250 VAC (General Use) at 40°C                 | 6,000                     |
|                        |                 |               | 15A, 24 VDC at 40°C                                 |                           |
|                        |                 |               | TV-8 at 40°C                                        | 25,000                    |
|                        |                 |               | 1/2HP, 125 VAC at 40°C                              | 1,000                     |
|                        |                 |               | 3/4HP, 240 VAC at 40°C                              |                           |
|                        |                 |               | 1HP, 250 VAC at 40°C                                |                           |
| G4W-2212( )-US-TV5(-Z) | 2               |               | 15 A, 250 VAC (General Use) (Same Polarity) at 40°C | 6,000                     |
|                        |                 |               | 10 A, 250 VAC (General Use) at 40°C                 |                           |
|                        |                 |               | 15A, 24 VDC at 40°C                                 |                           |
|                        |                 |               | TV-5 at 40°C                                        | 25,000                    |
|                        |                 |               | 1/2HP, 250 VAC at 40°C                              | 1,000                     |
|                        |                 |               | 1/3HP, 125 VAC at 40°C                              |                           |


## ■ Precautions

● Please refer to “PCB Relays Common Precautions” for correct use.

### Correct Use


#### ● Mounting

- When mounting more than two Relays on a PCB, keep the gap as shown in the following figure.
- No specified mounting direction.
- Not compatible with sockets.

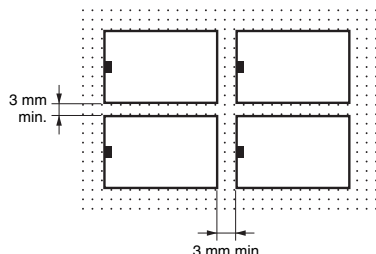

- There is the current-carrying metal part on the coil terminal.

Do not mount to the PCB with patterned metal surface.

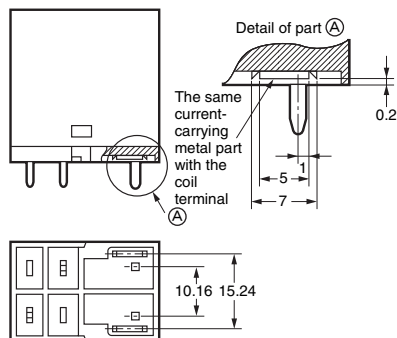

#### ● Other Precautions

- This Relay is suitable for power load switching of motors, transformers, solenoids, lamps, heaters, etc. Do not use the G4W to switch micro loads less than 100 mA, such as in signal applications.

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.  
 • Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note: Do not use this document to operate the Unit.**