



## DIN 48 x 24-mm Total Counter/Time Counter with Easy-to-read Displays and Water and Oil Resistance Equivalent to IP66

- High-visibility, negative transmissive LCD display with 8.5-mm-high characters and built-in red LED backlight at low power consumption.
- IP66 with oil resistance and NEMA 4 protection achieved by unifying the front with the case and by using oil-resistant parts and materials.
- Compact (80 mm) body.
- Just change a switch setting for either an NPN or PNP input.
- Supports both external resetting and manual resetting.
- Finger-protection terminal block cover prevents electrical shock and conforms to VDE0106, Part 100.
- Certified for UL and CSA safety standards.
- Complies with EMC standards (EN 61326) and CE Marking.



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

## Model Number Structure

### ■ Model Number Legend

H7GP-□□□  
1 2 3

#### 1. Classification

C: Total counter  
T: Time counter

#### 2. Supply Voltage

None: 100 to 240 VAC  
D: 12 to 24 VDC

#### 3. Case Color of Front Section

None: Light gray (Munsell 5Y7/1)  
B: Black

## Ordering Information

### ■ List of Models

#### Total counter

| Supply voltage | 6-digit total counter |          |
|----------------|-----------------------|----------|
|                | Light gray            | Black    |
| 100 to 240 VAC | H7GP-C                | H7GP-CB  |
| 12 to 24 VDC   | H7GP-CD               | H7GP-CDB |

#### Time counter

| Supply voltage | 6-digit time counter |          |
|----------------|----------------------|----------|
|                | Light gray           | Black    |
| 100 to 240 VAC | H7GP-T               | H7GP-TB  |
| 12 to 24 VDC   | H7GP-TD              | H7GP-TDB |

# Specifications

## ■ Ratings

| Item                    |                     | 6-digit total counter                                                                                                                                                                                                                                                                                                                                   |                           | 6-digit time counter                                                  |                           |
|-------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------|---------------------------|
|                         |                     | H7GP-C                                                                                                                                                                                                                                                                                                                                                  | H7GP-CD                   | H7GP-T                                                                | H7GP-TD                   |
| Rated supply voltage    |                     | 100 to 240 VAC (50/60 Hz)                                                                                                                                                                                                                                                                                                                               | 12 to 24 VDC (see note 1) | 100 to 240 VAC (50/60 Hz)                                             | 12 to 24 VDC (see note 1) |
| External power supply   |                     | 50 mA at 12 VDC                                                                                                                                                                                                                                                                                                                                         | ---                       | 50 mA at 12 VDC                                                       | ---                       |
| Operating voltage range |                     | 85% to 110% of rated supply voltage                                                                                                                                                                                                                                                                                                                     |                           |                                                                       |                           |
| Power consumption       |                     | 100 to 240 VAC: 6.5 VA max.<br>12 to 24 VDC: 0.6 W max.                                                                                                                                                                                                                                                                                                 |                           |                                                                       |                           |
| Dimensions              |                     | 48 x 24 x 80 mm (W x H x D)                                                                                                                                                                                                                                                                                                                             |                           |                                                                       |                           |
| Mounting method         |                     | Flush mounting                                                                                                                                                                                                                                                                                                                                          |                           |                                                                       |                           |
| External connections    |                     | Screw terminals                                                                                                                                                                                                                                                                                                                                         |                           |                                                                       |                           |
| Degree of protection    |                     | Panel surface: IP66 with oil resistance and NEMA Type 4 (indoors).                                                                                                                                                                                                                                                                                      |                           |                                                                       |                           |
| Display                 |                     | 7-segment, negative transmissive LCD (with red backlight)                                                                                                                                                                                                                                                                                               |                           |                                                                       |                           |
| Digits                  |                     | 6 digits (8.5-mm-high characters)                                                                                                                                                                                                                                                                                                                       |                           |                                                                       |                           |
| Input mode              |                     | Up (increment)                                                                                                                                                                                                                                                                                                                                          |                           | Accumulative                                                          |                           |
| Max. counting speeds    |                     | 30 Hz or 5 kHz (selected via DIP switch)                                                                                                                                                                                                                                                                                                                |                           | ---                                                                   |                           |
| Counting range          |                     | 0 to 999999                                                                                                                                                                                                                                                                                                                                             |                           | ---                                                                   |                           |
| Time specification      |                     | ---                                                                                                                                                                                                                                                                                                                                                     |                           | 0.1 to 99999.9 h/1 s to 99 h 59 min 59 s<br>(selected via DIP switch) |                           |
| Timing accuracy         |                     | ---                                                                                                                                                                                                                                                                                                                                                     |                           | ±100 ppm (−10°C to 55°C)                                              |                           |
| Memory backup           |                     | EEP-ROM (overwrites: 200,000 times min.) that can store data for 20 years min.                                                                                                                                                                                                                                                                          |                           |                                                                       |                           |
| Input                   | Input signals       | Count, reset, and key protection (see note 2)                                                                                                                                                                                                                                                                                                           |                           | Start, reset, and key protection (see note 2)                         |                           |
|                         | Input method        | No-voltage input (NPN transistor input) or voltage input (PNP transistor input) (selected via DIP switch)                                                                                                                                                                                                                                               |                           |                                                                       |                           |
|                         | Count, reset, start | No-voltage input (NPN transistor input)<br>Short-circuit (ON) impedance: 1 kΩ max.<br>Short-circuit (ON) residual voltage:2 VDC max.<br>Open (OFF) impedance: 100 kΩ min.<br>Voltage input (PNP transistor input)<br>Short-circuit (ON) impedance: 1 kΩ max.<br>ON voltage: 9 to 24 VDC<br>OFF voltage: 5 VDC max.<br>Open (OFF) impedance: 100 kΩ min. |                           |                                                                       |                           |
|                         | Key protection      | No-voltage input (NPN transistor input)<br>Short-circuit (ON) impedance: 1 kΩ max.<br>Short-circuit (ON) residual voltage:0.5 VDC max.<br>Open (OFF) impedance: 100 kΩ min.                                                                                                                                                                             |                           |                                                                       |                           |
|                         |                     |                                                                                                                                                                                                                                                                                                                                                         |                           |                                                                       |                           |
| Input response speed    | Reset               | 20 or 1 ms (automatically switched according to counting speed)                                                                                                                                                                                                                                                                                         |                           | 20 ms                                                                 |                           |
|                         | Start               | ---                                                                                                                                                                                                                                                                                                                                                     |                           | 20 ms                                                                 |                           |
|                         | Key protection      | Approx. 1 s                                                                                                                                                                                                                                                                                                                                             |                           | Approx. 1 s                                                           |                           |
| Reset system            |                     | External and manual resets                                                                                                                                                                                                                                                                                                                              |                           |                                                                       |                           |

**Note:** 1. Contains 20% ripple (p-p) max.

2. Only a non-voltage input (NPN transistor) is possible for the key protection input. The key protection input will be a non-voltage input even if the NPN/PNP input mode is set to PNP. Key protection is used to prohibit operating the Reset Key. The reset input terminals will still be functional.

## ■ Characteristics

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Insulation resistance</b>     | 100 MΩ min. (at 500 VDC)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Dielectric strength</b>       | 2,000 VAC, 50/60 Hz for 1 min between current-carrying terminal and exposed non-current-carrying metal parts (AC model)<br>1,000 VAC, 50/60 Hz for 1 min between current-carrying terminal and exposed non-current-carrying metal parts (DC model)<br>2,000 VAC, 50/60 Hz for 1 min between power terminals and control input terminals (AC model)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Impulse withstand voltage</b> | 3 kV (between power terminals) (1 kV for 12-to-24-VDC models)<br>4.5 kV (between current-carrying terminal and exposed non-current-carrying metal parts) (1.5 kV for 12-to-24-VDC models)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Noise immunity</b>            | ±1.5 kV (between AC power terminals), ±480 V (between DC power terminals),<br>±480 V (between input terminals);<br>square-wave noise by noise simulator (pulse width: 100 ns/1 μs, 1-ns rise)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Static immunity</b>           | Display: Malfunction:8 kV<br>Destruction:15 kV<br>DIP switch: Malfunction:4 kV<br>Destruction:8 kV                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Vibration resistance</b>      | Destruction: 10 to 55 Hz with 0.75-mm single amplitude, 2 hours each in three directions<br>Malfunction: 10 to 55 Hz with 0.5-mm single amplitude, 10 minutes each in three directions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Shock resistance</b>          | Destruction: 294 m/s <sup>2</sup> each in three directions<br>Malfunction: 196 m/s <sup>2</sup> each in three directions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Ambient temperature</b>       | Operating: -10°C to 55°C (with no icing)<br>Storage: -25°C to 65°C (with no icing)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Ambient humidity</b>          | Operating: 35% to 85%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>EMC</b>                       | (EMI) EN61326-1 (note 1.)<br>Emission Enclosure: EN55011 Group 1 class A<br>Emission AC Mains: EN55011 Group 1 class A<br>(EMS) EN61326-1 (note 1.)<br>Immunity ESD: EN61000-4-2: 4 kV contact discharge (level 2)<br>8 kV air discharge (level 3)<br>Immunity RF-interference: EN61000-4-3: 10 V/m (Amplitude-modulated, 80 MHz to 1 GHz) (level 3);<br>10 V/m (Pulse-modulated, 900 MHz ±5 MHz) (level 3)<br>Immunity Conducted Disturbance: EN61000-4-6: 10 V (0.15 to 80 MHz) (according to EN61000-6-2)<br>Immunity Burst: EN61000-4-4: 2 kV power-line (level 3);<br>2 kV I/O signal-line (level 4)<br>Immunity Surge: EN61000-4-5: 1 kV line to lines (power and output lines) (level 2);<br>2 kV line to ground (power and output lines) (level 3)<br>Immunity Voltage Dip/Interruption: EN61000-4-11: 0.5 cycle, 100% (rated voltage) |
| <b>Approved standards</b>        | UL508 (note 2), CSA C22.2 No.14 (note 2), conforms to EN61010-1, VDE0106/P100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Case color</b>                | Rear section: Gray smoke; Front section: 5Y7/1 (light gray) or N1.5 (black)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Weight</b>                    | Approx. 75 g                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Note:** 1. Industrial electromagnetic environment (EN/IEC 61326-1 Table 2)

2. UL508 and CAN/CSA-C22.2 No.14 certification conditions

- Power supply 100 to 240VAC types  
Ambient temperature 30°C Single mounting
- Power supply 12 to 24VDC types  
Ambient temperature 40°C Single mounting


# Connections

## ■ Terminal Arrangement


**Note:** Non-contact input is also available.

### AC Models

#### H7GP-C

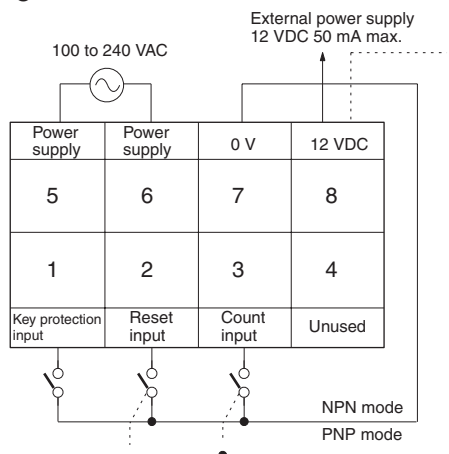


#### H7GP-T

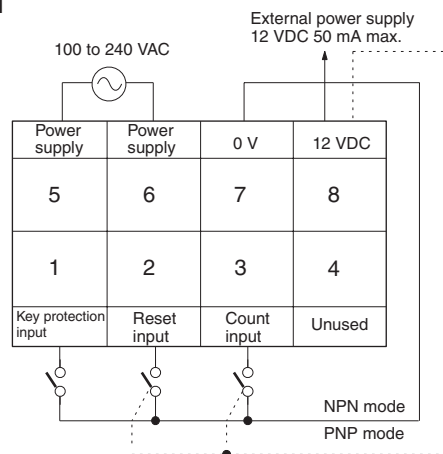


### DC Models

#### H7GP-CD

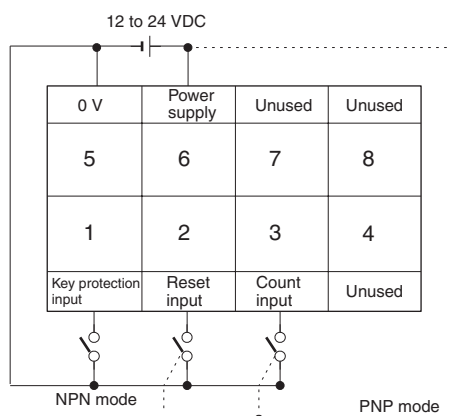

#### H7GP-TD

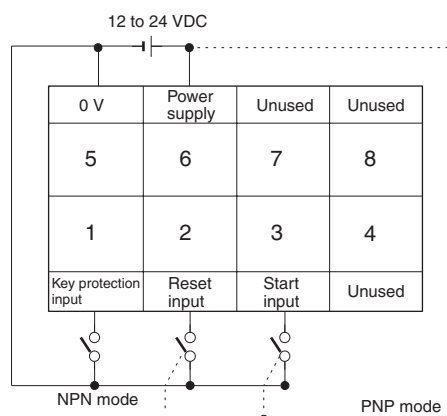

# Operation

## DIP Switch Settings

Set all DIP switches before mounting the Counter to a control panel. All switches are set toward the display panel before shipping.

### H7GP-C/-CD

| Switch                       | Item                    | Function      |       |
|------------------------------|-------------------------|---------------|-------|
| 3 (On right side from front) | Input mode (note 1)     | Display side  | NPN   |
|                              |                         | Terminal side | PNP   |
| 4 (On left side from front)  | Counting speed (note 1) | Display side  | 30 Hz |
|                              |                         | Terminal side | 5 kHz |

### H7GP-T/-TD


| Switch                       | Item                | Function      |                   |
|------------------------------|---------------------|---------------|-------------------|
| 3 (On right side from front) | Input mode (note 1) | Display side  | NPN               |
|                              |                     | Terminal side | PNP               |
| 4 (On left side from front)  | Time range (note 1) | Display side  | 99999.9h (note 2) |
|                              |                     | Terminal side | 99 h 59 min 59 s  |

**Note: 1.** When the setting has been changed, turned power off and on to continue. The display will show "0" when the power is turned back on.

**2.** The decimal point will flash every second when "99999.9 h" is set.


## Operating Modes

### Total Counters

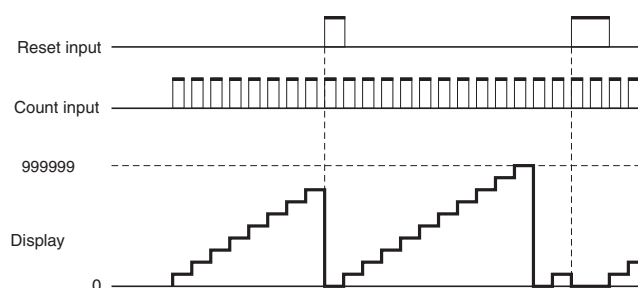


**Note:** The count value will return to "0" when "999999" is exceeded. The display and output are turned OFF when the power supply turns OFF, but the count value is stored internally.

### Time Counters

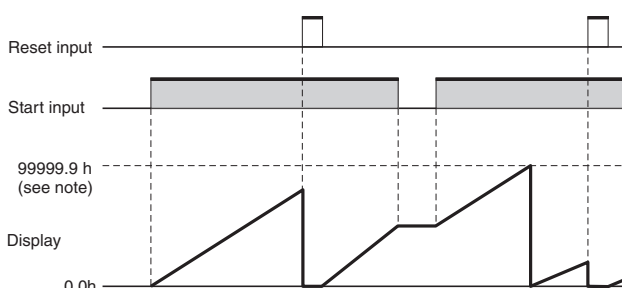

**Note:** Display values are shown for full scale set to 99999.9 h. The count value will return to "0" when "99999.9" is exceeded. The display and output are turned OFF when the power supply turns OFF, but the count value is stored internally.

## Nomenclature

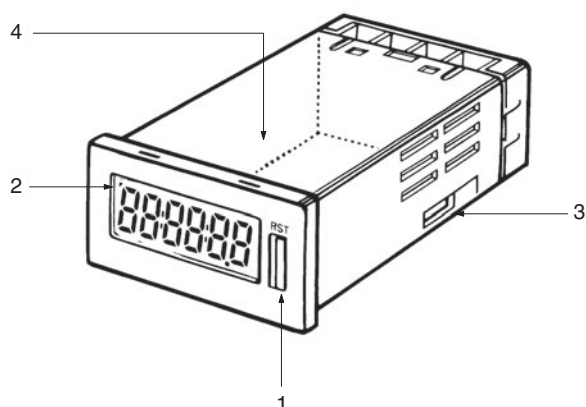


- Reset Key**  
Resets the count value, but will not operate while the keys are protected.
- Key Protection Indicator**  
Lit while the keys are protected. (Reset Key is disabled.).
- NPN/PNP DIP Switch**  
(Count or start with reset)  
When the setting has been changed, turned power off and on to continue. The display will show "0" when the power is turned back on. See below for details.
- Counting Speed DIP Switch (H7GP-C)**  
**Time Range DIP Switch (H7GP-T)**  
When the setting has been changed, turned power off and on to continue. The display will show "0" when the power is turned back on. Refer to *DIP Switch Setting* for details.

# Dimensions


**Note:** All units are in millimeters unless otherwise indicated.

H7GP-C  
H7GP-T

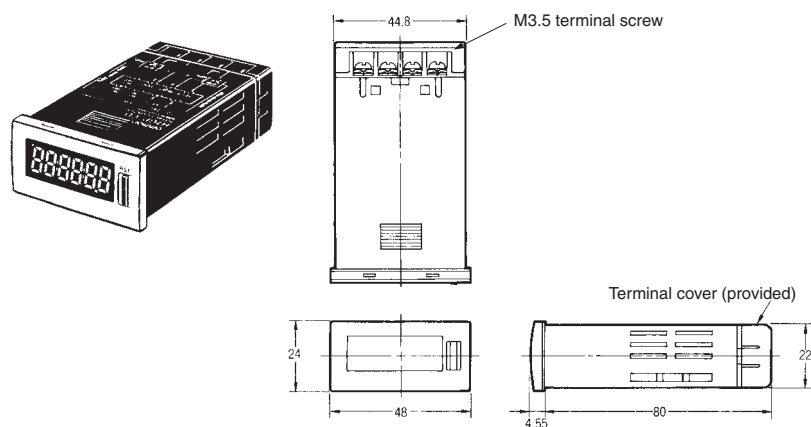

## Panel Cutouts

Panel cutouts are as shown below (according to DIN43700).

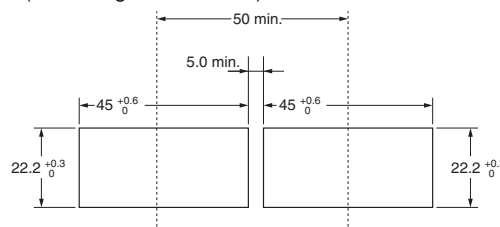


**Note:** 1. The mounting panel thickness should be 1 to 6 mm.

2. Water resistance will be lost if Counters are mounted side-by-side.

3. The terminal screws are M3.5. (The effective thread length is 6 mm.)

4. When horizontally mounting Counters side-by-side, leave at least 50 mm between any two Counters.

## With Flush Mounting Bracket

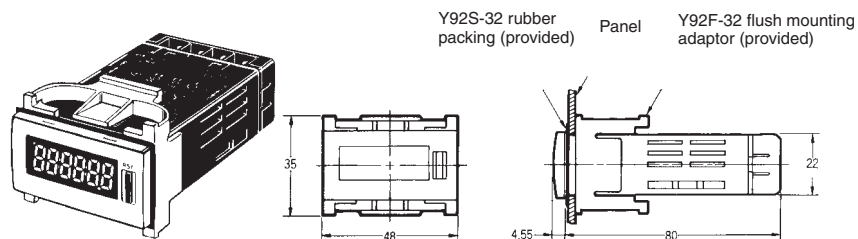

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

## Terms and Conditions Agreement

### Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

### Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

### Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

### Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

### Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

### Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

### Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.