


Ferrule

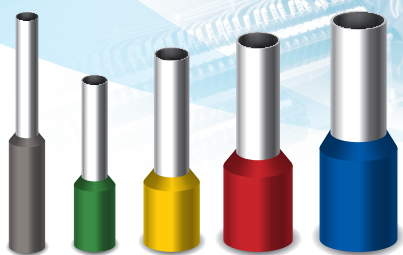


Ferrules with insulation collars can be used.

*Applicable wire size: AWG22 (0.5 mm²) to AWG14 (2.5 mm²)


*DIN46228, part4/09.90

Ferrule Shape

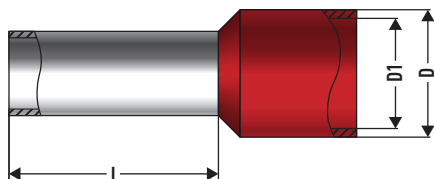

L: 12 mm, Related standard: DIN46228

Wire Stripped View

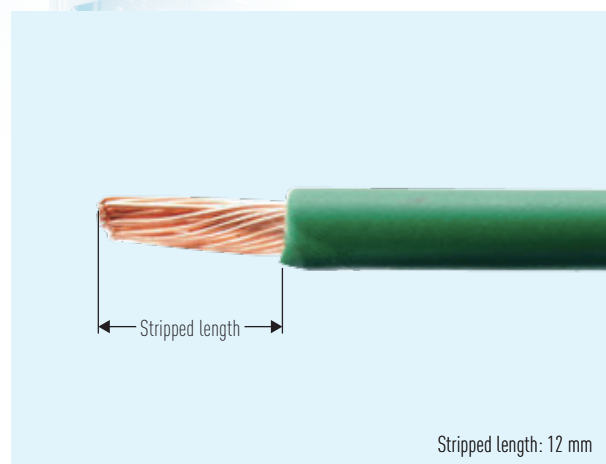

Stripped length: 12 mm

When using a stranded wire (or when a crimp terminal is not used)

*Applicable wire size: AWG22 (0.5 mm²) to AWG14 (2.5 mm²)

<Note> Minus Screw Terminals

For G2RV-SL700 and G3RV-SL700 Series, different stripped lengths apply to ferrules or stranded wires. Refer to the catalog for details.


Precautions for Selecting Ferrules

- Select a ferrule that is applicable to the wire size being used. Also the L length must match the wire stripped size for the terminal block.
- Ensure that the D diameter is smaller than the maximum wire sheathed diameter for the terminal block.
- Ensure that the D1 diameter is larger than the wire sheathed diameter.

Accessories


Crossbars

P2RVVM

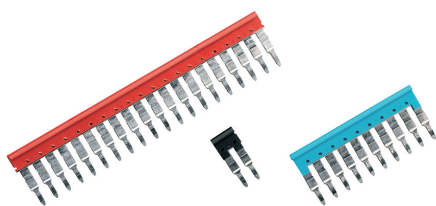


Plastic Labels for G2RV Sockets

R99-15 for G2RV

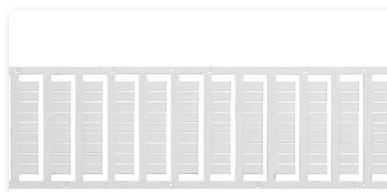

Labels (Stickers) for G2RV Sockets

R99-16 for G2RV



Accessory	Type and box quantity	Model	Color		Model number
Crossbar	Bar with 2 poles (10 bars/box)	P2RVM-020	Red	R	P2RVM-020R
			Blue	S	P2RVM-020S
			Black	B	P2RVM-020B
	Bar with 3 poles (10 bars/box)	P2RVM-030	Red	R	P2RVM-030R
			Blue	S	P2RVM-030S
			Black	B	P2RVM-030B
	Bar with 4 poles (10 bars/box)	P2RVM-040	Red	R	P2RVM-040R
			Blue	S	P2RVM-040S
			Black	B	P2RVM-040B
	Bar with 10 poles (10 bars/box)	P2RVM-100	Red	R	P2RVM-100R
			Blue	S	P2RVM-100S
			Black	B	P2RVM-100B
Label	Plastic labels (5 sheets (600 labels)/box (1 sheet = 120 labels))	R99-15 for G2RV	Red	R	P2RVM-200R
			Blue	S	P2RVM-200S
			Black	B	P2RVM-200B
Label	Stickers (10 sheets (4,840 labels)/bag (1 sheet = 484 labels))	R99-16 for G2RV			R99-15 for G2RV
					R99-16 for G2RV