

XM2/XM3

D-sub Connectors


D-sub Connectors Ideal for Interfacing with OA Equipment

OA:Office Automation



- D-sub Connectors Ideal for Interfacing with OA Equipment.
- Shielded connectors that prevent EMI.
- Noise can be suppressed effectively by using the XM2S Plastic Hood with metallic finish.
- XM3B-F multi-hole ferrite-core models are also available. Use these models to suppress high-frequency noise and save PCB mounting space.
- Compact and tough structure with a metal shell provided.
- A wide variety of mounting brackets and grounding metals are available.

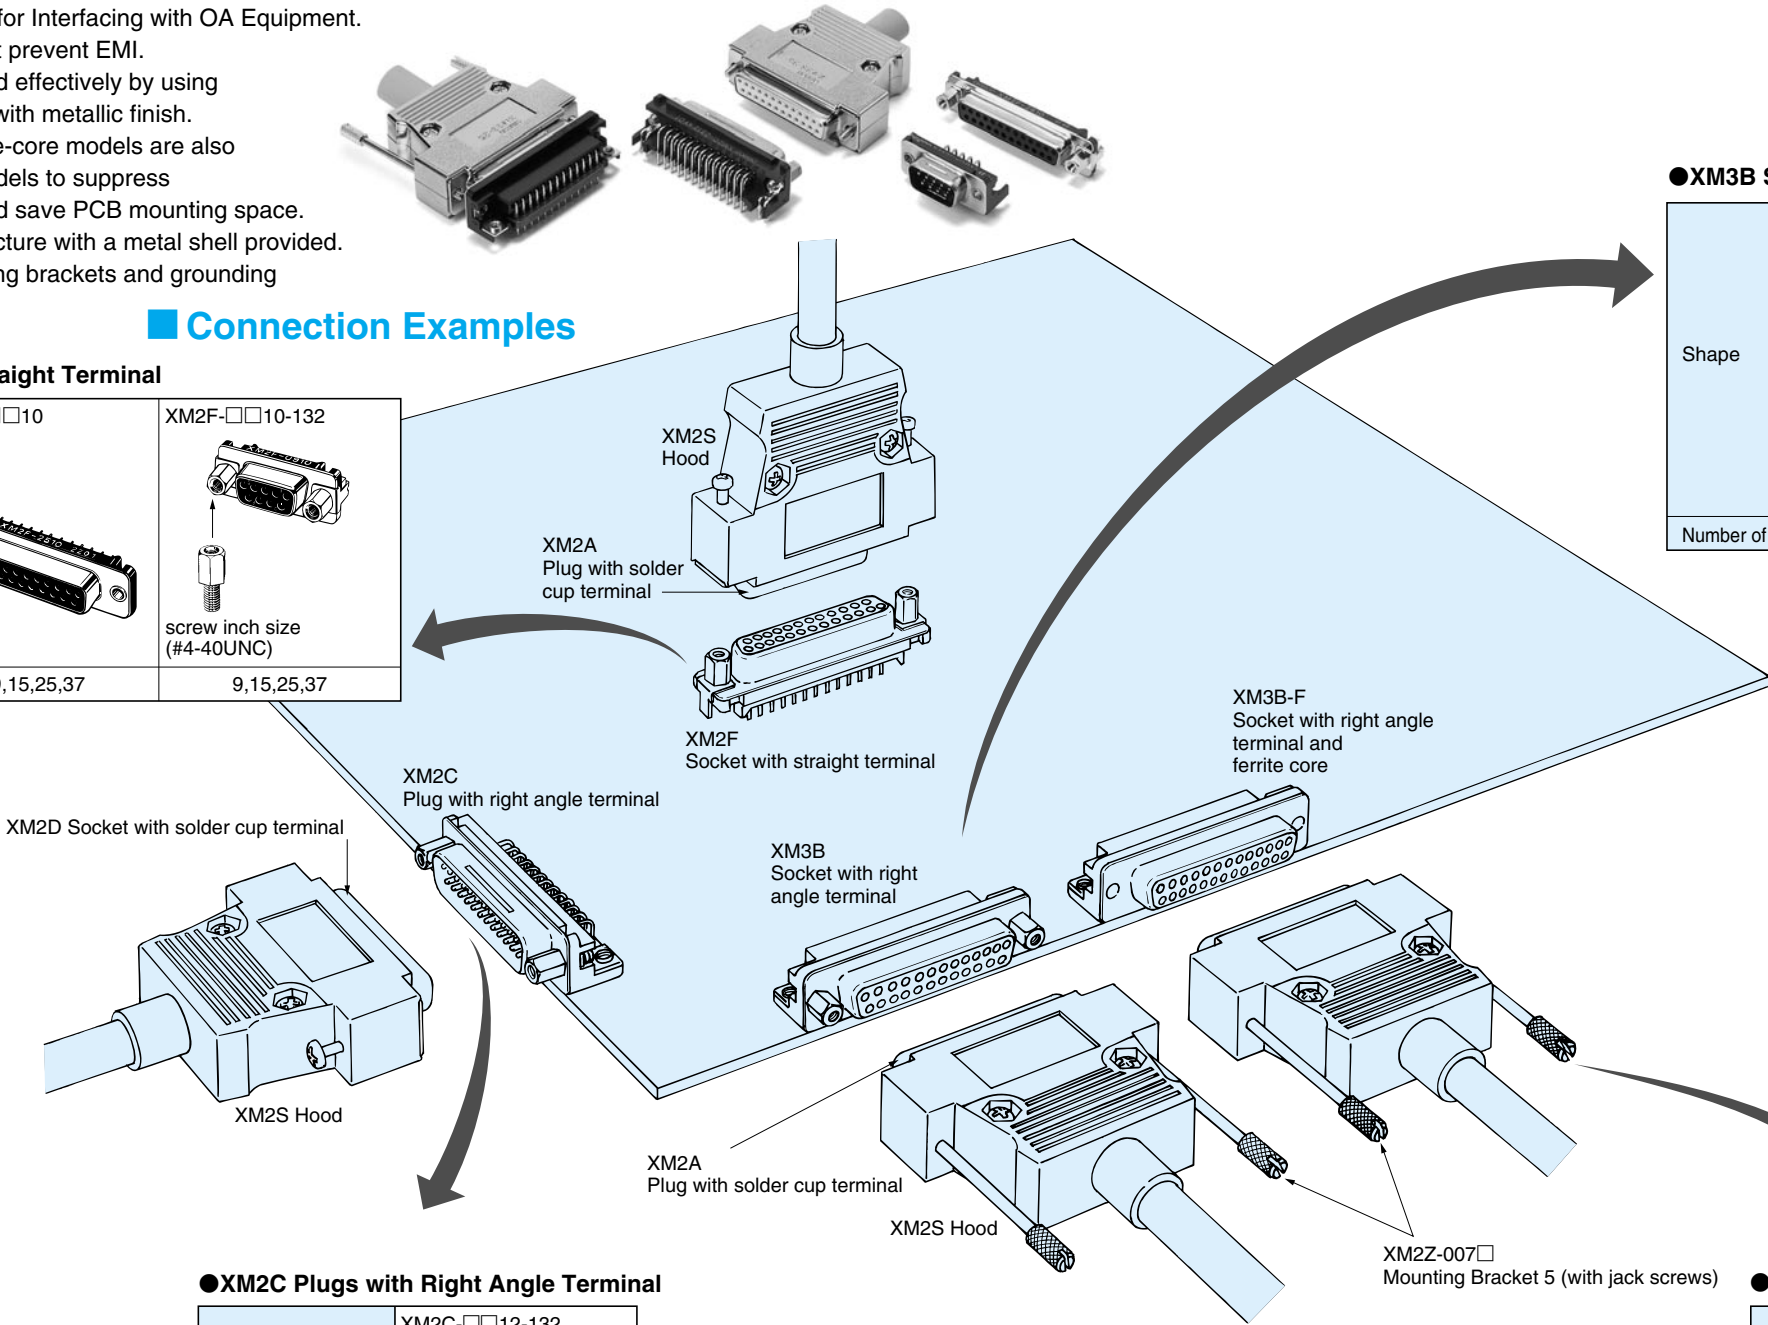
Connection Examples

●XM2F Sockets with Straight Terminal


Shape	XM2F-□□10	XM2F-□□10-132
		
Number of contacts	9,15,25,37	9,15,25,37

●XM3B Sockets with Right Angle Terminal




Shape	XM3B-□□22-132 screw inch size (#4-40UNC)	XM3B-□□22
		
Number of contacts	9,15,25,37	9,15,25,37



●XM2C Plugs with Right Angle Terminal

Shape	XM2C-□□12-132
	
Number of contacts	9,15,25,37

●Hood/Solder Cup Terminal

Shape	Hood XM2S-□□13 with accessory	Plug XM2A-□□01	Socket XM2D-□□01
			
Number of contacts	9,15,25,37	9,15,25,37	9,15,25,37