XM2/XM3
D-sub Connectors

D-sub Connectors Ideal for Interfacing with OA Equipment

OA:Office Automation

- ●D-sub Connectors Ideal for Interfacing with OA Equipment.
- ●Shielded connectors that prevent EMI.
- ●Noise can be suppressed effectively by using the XM2S Plastic Hood with metallic finish.
- ●XM3B-F multi-hole ferrite-core models are also available. Use these models to suppress high-frequency noise and save PCB mounting space.
- ●Compact and tough structure with a metal shell provided.
- ●A wide variety of mounting brackets and grounding metals are available.

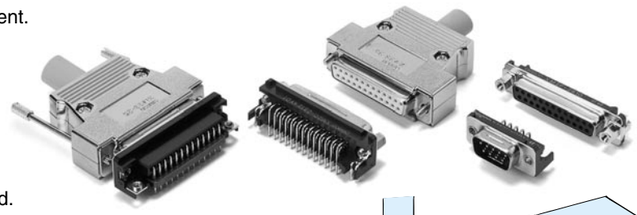

■ Connection Examples

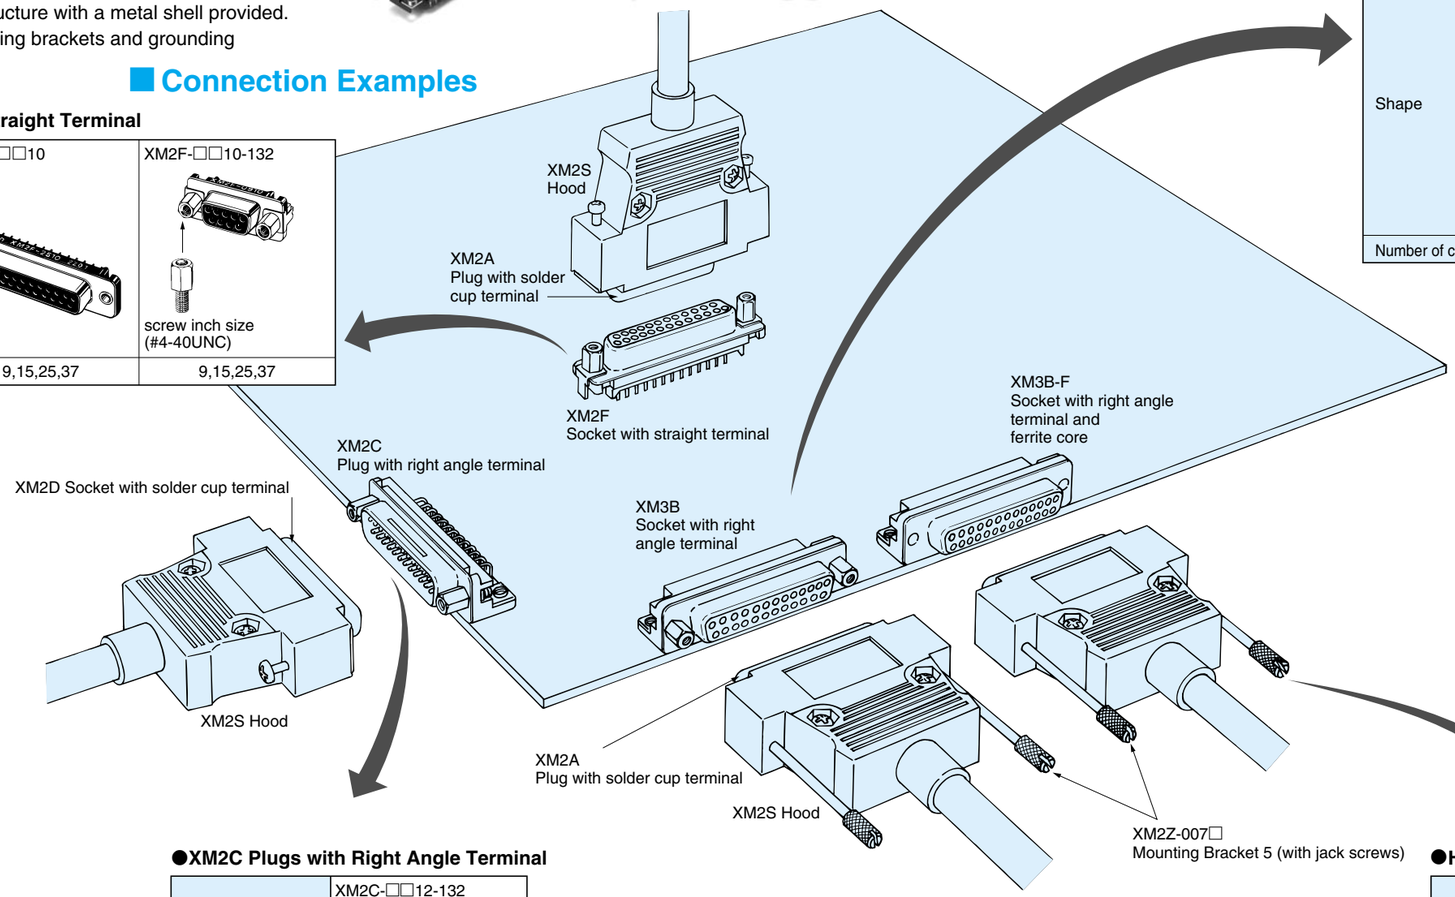

●XM2F Sockets with Straight Terminal

	XM2F-□□10	XM2F-□□10-132
Shape		screw inch size (#4-40UNC)
Number of contacts	9,15,25,37	9,15,25,37

●XM3B Sockets with Right Angle Terminal

	XM3B-□□22-132	XM3B-□□22
Shape	screw inch size (#4-40UNC)	
Number of contacts	9,15,25,37	9,15,25,37

●XM2C Plugs with Right Angle Terminal

	XM2C-□□12-132
Shape	screw inch size (#4-40UNC)
Number of contacts	9,15,25,37

●Hood/Solder Cup Terminal

	Hood XM2S-□□13 with accessory	Plug XM2A-□□01	Socket XM2D-□□01
Shape			
Number of contacts	9,15,25,37	9,15,25,37	9,15,25,37