


XS2 Accessories

■ XS2 Connector Covers


Water-resistant Covers

XS2Z-11

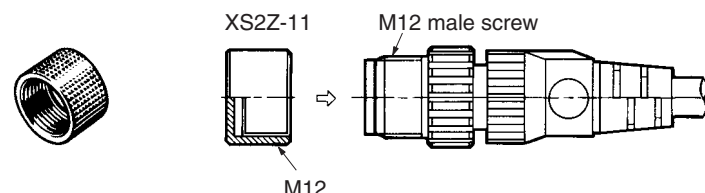

The Water-resistant Cover ensures IP67. When mounting the Water-resistant Cover to a Connector, be sure to apply a torque range between 0.39 and 0.49 N·m to tighten the Water-resistant Cover.

XS2Z-12

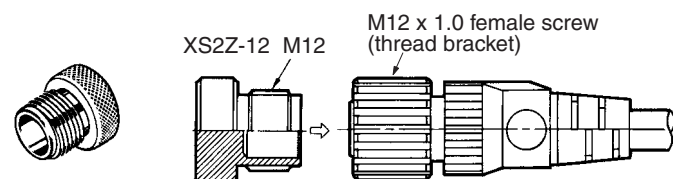


■ Ordering Information

Model	Minimum order	Material	Suitable connector	
			Model	Mounting portion
XS2Z-11	50	Brass/nickel plated	XS2G/XS2H/XS2M/XS2R	M12 male screw
XS2Z-12			XS2C/XS2R/XS2F/XS2P/XW3B	M12 female screw (thread bracket)

Note: Orders are accepted in multiples of the minimum order.


Dust Covers

XS2Z-13

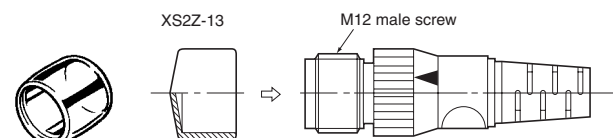

The Dust Cover is for dust prevention and does not ensure IP67 degree of protection. When mounting the Dust Cover to a connector, be sure to press the Dust Cover onto the Connector until the Connector is fully inserted into the Dust Cover.

XS2Z-15/XS1Z-14

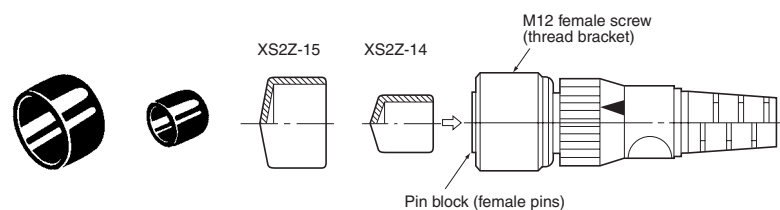

■ Ordering Information


Model	Minimum order	Material	Suitable connector	
			Model	Mounting portion
XS2Z-13	50	Transparent polyvinyl chloride	XS2G/XS2H/XS2M/XS2R	M12 male screw
XS2Z-14		Red polyvinyl chloride	XS2C/XS2R/XS2F/XS2P/XW3B	Pin block (female pins)
XS2Z-15				M12 female screw (thread bracket)

Note: Orders are accepted in multiples of the minimum order.

■ Tools

Crimp Tool

XY2F-0002




Locator

XY2F-0003




Pin-block Extraction Tool

XY2F-0001



Use the Crimp Tool to crimp a cable core to the XS2U Crimping Pin used with the XS2C or XS2G Crimping Connector.

Note: The XY2F-0002 Crimp Tool is DMC's AFM8 (M22520/2-01). Mount the XY2F-0003 Locator (sold separately) to the locator guide of the Crimp Tool with a screw provided with the XY2F-0003 Locator.

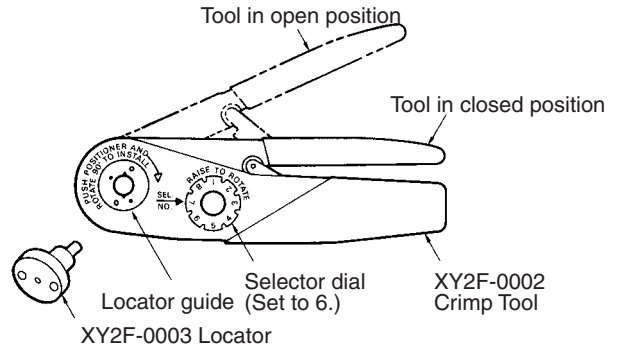

Use this tool to extract a Pin Block from the covers in order to make wiring changes or corrections after the cover has been mounted to the pin block for Connector Assemblies (XS2C/XS2G, soldering/crimping).