


32-point, Connector-type Input Units (Group 2) for Programmable Controllers

For 64-point, Connector-type Input Units for Programmable Controllers

XW2Z-□□□D




Note: Do not use the G79-I□C-□ (G7TC cable with Connector) with the XW2C because it is wired differently.

Ordering Information

Applicable Terminal Block Conversion Units	Cable length L (mm) (See note 2.)		Model	Applicable Programmable Controller Input Units
	A	B		
XW2C-20G6-IO16 (See note 1.)	1,000	750	XW2Z-100D	CQM1-ID213
XW2C-20G5-IN16	1,500	1,250	XW2Z-150D	CQM1-ID112
XW2B-20G4	2,000	1,750	XW2Z-200D	C200H-ID111
XW2B-20G5	3,000	2,750	XW2Z-300D	C200H-ID216
XW2B-40G5-T	5,000	4,750	XW2Z-500D	C200H-ID217
XW2D-20G6				C500-ID114
XW2E-20G5-IN16				C500-ID219

Note: 1. Only the inputs of the XW2C-20G6-IO16 are connected.

2. Cable length L (mm)

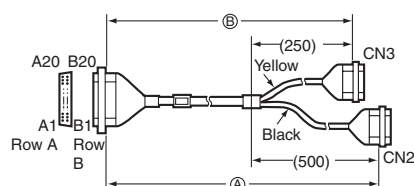

Connector CN2 (black side) is for row A on CN1 and Connector CN3 (yellow side) is for row B on CN1.

Wiring Diagram

