

FLKM 14-PA-SLC500/IN - Front adapter



2293462

<https://www.phoenixcontact.com/pc/products/2293462>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE front adapter, 2 x 8 channels can be connected, for Allen-Bradley SLC 500, 1746 IA16, IB16, ITB16 and IN16

Your advantages

- Suitable VARIOFACE termination boards with a wide range of functions and connection options

Commercial data

Item number	2293462
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CK231R
Catalog page	Page 476 (C-5-2017)
GTIN	4017918108861
Weight per piece (including packing)	57.4 g
Weight per piece (excluding packing)	57.4 g
Customs tariff number	85369010
Country of origin	DE

FLKM 14-PA-SLC500/IN - Front adapter



2293462

<https://www.phoenixcontact.com/pc/products/2293462>

Technical data

Product properties

Product type	Front adapter
--------------	---------------

Insulation characteristics

Insulation	Functional insulation
------------	-----------------------

Insulation characteristics

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

Electrical properties

Operating voltage (AC)	≤ 25 V AC
Operating voltage (DC)	≤ 60 V DC
Current (Per path)	≤ 1 A
Current (Total current per byte)	≤ 2 A (Feed-in via connector)
Rated insulation voltage	63 V
Rated surge voltage	0.6 kV

Supported controller ALLEN-BRADLEY SLC 500

Suitable I/O card	1746 IA16
	1746 IB16
	1746 ITB16
	1746 IN16

Connection data

Field level

Connection method	IDC/FLK pin strip
Number of connections	2
Number of positions	14
Pitch	2.54 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP00
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Standards and regulations

Standards/regulations	IEC 60664
	DIN EN 50178

FLKM 14-PA-SLC500/IN - Front adapter



2293462

<https://www.phoenixcontact.com/pc/products/2293462>

Mounting

Mounting position	any
-------------------	-----

Notes

Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
--------------------	--

FLKM 14-PA-SLC500/IN - Front adapter




2293462

<https://www.phoenixcontact.com/pc/products/2293462>

Drawings

Circuit diagram

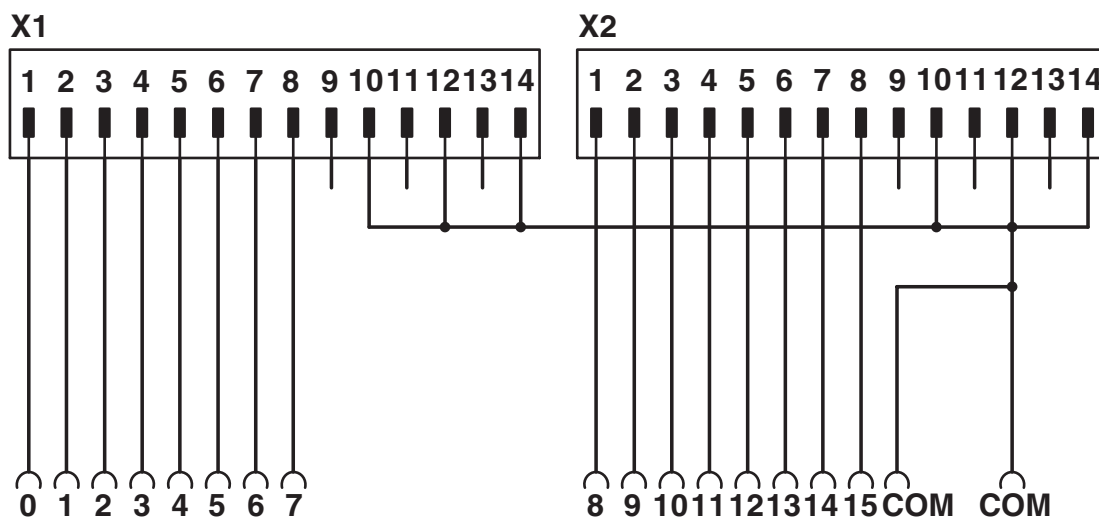

FLKM 14-PA-SLC500/IN - Front adapter



2293462

<https://www.phoenixcontact.com/pc/products/2293462>

Classifications

ECLASS

ECLASS-11.0	27242292
ECLASS-13.0	27242292

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com