



Similar to image

**Technical data:**

<b>Overvoltage class</b>		3
<b>type of voltage</b>		AC/DC
<b>Tripping characteristic class</b>		C
<b>Degree of pollution</b>		3
<b>Mounting depth</b>	mm	70
<b>Energy limiting class</b>		3
<b>Number of poles</b>		3
<b>Number of pitch units for width</b>		3
<b>Product function / n-switching</b>		No
<b>Supply voltage frequency / rated value</b>	Hz	50
<b>Breaking capacity current / [nicht versorgt - nach IEC 60947-2] / [nicht versorgt - Bemessungswert]</b>	kA	20
<b>Breaking capacity current / acc. to EN 60898 / rated value</b>	kA	15
<b>Supply voltage / for AC / rated value</b>	V	400
<b>Current / for AC / rated value</b>	A	1
<b>Protection class IP</b>		IP 20
<b>Product extension / can be installed / supplementary device</b>		Yes
<b>power loss</b>	W	3.6

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Global Industry Mall (Online ordering system)



<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SY7301-7/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SY7301-7](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY7301-7)

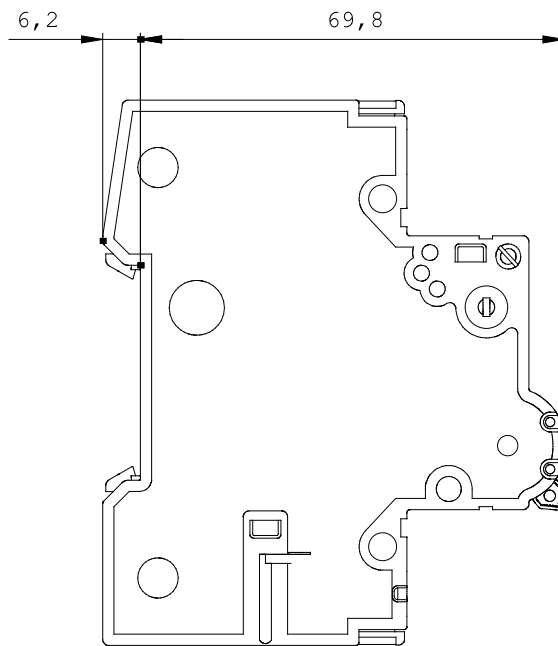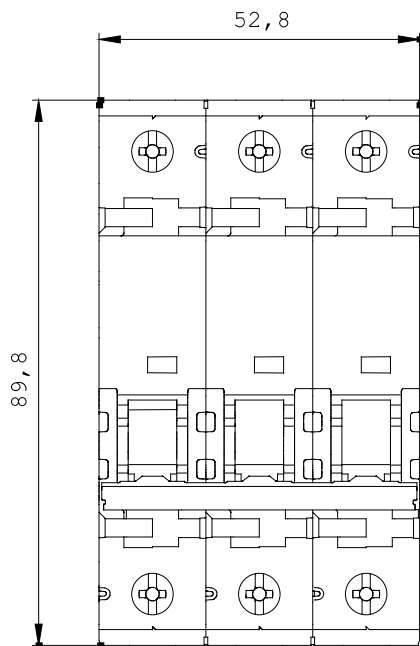

last change:

Dec 21, 2010