# **DATASHEET - T0-3-8342/I1/SVB-SW**



Main switch, 6 pole, 20 A, STOP function, 90 °, Lockable in the 0 (Off) position, surface mounting



Part no. T0-3-8342/I1/SVB-SW

Catalog No. 207160

#### **Delivery program**

| Delivery program                |                |                    |  |
|---------------------------------|----------------|--------------------|--|
| Product range                   |                |                    | Main switch<br>maintenance switch<br>Repair switch |
| Part group reference            |                |                    | ТО   |
| Stop Function                   |                |                    | STOP function                                      |
|                                 |                |                    | With black rotary handle and locking ring          |
| Number of poles                 |                |                    | 6 pole   |
| Locking facility                |                |                    | Lockable in the 0 (Off) position                   |
| Degree of Protection            |                |                    | IP65   |
|                                 |                |                    | totally insulated                                  |
| Design                          |                |                    | surface mounting                                   |
|                                 |                |                    |  |
| Contact sequence                |                |                    | 0            |
| Switching angle                 |                | 0                  | 90   |
| Function                        |                |                    | O OFF  |
| Motor rating AC-23A, 50 - 60 Hz |                |                    |  |
| 400 V                           | P              | kW                 | 5.5  |
| Rated uninterrupted current     | l <sub>u</sub> | Α                  | 20   |
| Number of contact units         |                | contact<br>unit(s) | 3  |
|                                 |                |                    |  |

#### **Technical data** General

| General                               |           |      |   |
|---------------------------------------|-----------|------|---|
| Standards                             |           |      | IEC/EN 60947, VDE 0660, IEC/EN 60204<br>Switch-disconnector according to IEC/EN 60947-3 |
| Climatic proofing                     |           |      | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30          |
| Ambient temperature                   |           |      |   |
| Enclosed                              |           | °C   | -25 - +40   |
| Overvoltage category/pollution degree |           |      | III/3   |
| Rated impulse withstand voltage       | $U_{imp}$ | V AC | 6000  |
| Mechanical shock resistance           |           | g    | 15  |
| Mounting position                     |           |      | As required   |

#### Contacts

| Contacts  |                 |                   |  |
|---|-----------------|-------------------|--|
| Mechanical variables  |                 |                   |  |
| Number of poles   |                 |                   | 6 pole   |
| Electrical characteristics  |                 |                   |  |
| Rated operational voltage   | U <sub>e</sub>  | V AC              | 690  |
| Rated uninterrupted current   | Iu              | Α                 | 20   |
| Note on rated uninterrupted current !u                                  |                 |                   | Rated uninterrupted current $I_u$ is specified for max. cross-section. |
| Load rating with intermittent operation, class 12                       |                 |                   |  |
| AB 25 % DF  |                 | x l <sub>e</sub>  | 2  |
| AB 40 % DF  |                 | x l <sub>e</sub>  | 1.6  |
| AB 60 % DF  |                 | x l <sub>e</sub>  | 1.3  |
| Short-circuit rating  |                 | Ü                 |  |
| Fuse  |                 | A gG/gL           | 20   |
| Rated short-time withstand current (1 s current)                        | I <sub>cw</sub> | A <sub>rms</sub>  | 320  |
| Note on rated short-time withstand current lcw                          | ·Cvv            | - 11115           | Current for a time of 1 second   |
| Rated conditional short-circuit current                                 | Iq              | kA                | 6  |
| Switching capacity  | 'q              | NA.               |  |
| cos φ rated making capacity as per IEC 60947-3                          |                 | Α                 | 130  |
| Rated breaking capacity cos φ to IEC 60947-3                            |                 | A                 |  |
| 230 V   |                 | A                 | 100  |
| 400/415 V   |                 | A                 | 110  |
| 500 V   |                 | A                 | 80   |
| 690 V   |                 | A                 | 60   |
| Safe isolation to EN 61140  |                 |                   |  |
| between the contacts  |                 | V AC              | 440  |
| Current heat loss per contact at I <sub>e</sub>                         |                 | W                 | 0.6  |
| Current heat loss per auxiliary circuit at I <sub>e</sub> (AC-15/230 V) |                 | CO                | 0.6  |
| Lifespan, mechanical  | Operations      | x 10 <sup>6</sup> | > 0.4  |
|   |                 | X IU              |  |
| Maximum operating frequency AC  | Operations/h    |                   | 1200   |
| AC-3  |                 |                   |  |
| Rating, motor load switch   | Р               | kW                |  |
| 220 V 230 V   | P               | kW                | 3  |
| 230 V Star-delta  | P               | kW                | 5.5  |
| 400 V 415 V   | P               | kW                | 5.5  |
| 400 V Star-delta  | P               | kW                | 7.5  |
| 500 V   | P               | kW                | 5.5  |
| 500 V Star-delta  | P               | kW                | 7.5  |
| 690 V   | P               | kW                | 4  |
| 690 V Star-delta  | P               | kW                | 5.5  |
| Rated operational current motor load switch                             |                 |                   |  |
| 230 V   | I <sub>e</sub>  | A                 | 11.5   |
| 230 V star-delta  |                 | A                 | 20   |
|   | le              |                   |  |
| 400V 415 V  | l <sub>e</sub>  | A                 | 11.5   |
| 400 V star-delta  | l <sub>e</sub>  | A                 | 20   |
| 500 V   | l <sub>e</sub>  | Α                 | 9  |
| 500 V star-delta  | l <sub>e</sub>  | Α                 | 15.6   |
| 690 V   | l <sub>e</sub>  | Α                 | 4.9  |
| 690 V star-delta  | l <sub>e</sub>  | Α                 | 8.5  |
| AC-21A  |                 |                   |  |
| Rated operational current switch  |                 |                   |  |
| 440 V   | l <sub>e</sub>  | Α                 | 20   |
| AC-23A  |                 |                   |  |
| Motor rating AC-23A, 50 - 60 Hz   | Р               | kW                |  |
|   |                 |                   |  |

| 5 -·····6 1                                   |                   |                 |   |
|---|-------------------|-----------------|---|
| Tightening torque                             |                   | lb-in           | NO.5  |
| Terminal capacity  Terminal screw             |                   |                 | M3.5  |
| Rating data for approved types                |                   |                 |   |
| Notes   |                   |                 | B10 <sub>d</sub> values as per EN ISO 13849-1, table C1 |
| Technical safety parameters:                  |                   |                 |   |
| Tightening torque for terminal screw          |                   | Nm              | 1   |
| Terminal screw                                |                   |                 | M3.5  |
| Flexible with ferrules to DIN 46228           |                   | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)                    |
| Solid or stranded                             |                   | $\text{mm}^2$   | 1 x (1 - 2,5)<br>2 x (1 - 2,5)                          |
| Terminal capacities                           |                   |                 |   |
| Control circuit reliability at 24 V DC, 10 mA | Fault probability | H <sub>F</sub>  | $< 10^{-5}$ , $< 1$ fault in 100000 operations          |
| Voltage per contact pair in series            |                   | V               | 32  |
| Rated operational current                     | le                | Α               | 10  |
| DC-13, Control switches L/R = 50 ms           |                   |                 |   |
| Contacts                                      |                   | Quantity        | 5   |
| Rated operational current                     | I <sub>e</sub>    | Α               | 5   |
| 240 V   |                   |                 |   |
| Contacts                                      | ·                 | Quantity        |   |
| Rated operational current                     | I <sub>e</sub>    | Α               | 5   |
| Contacts<br>120 V                             |                   | Quantity        | J   |
| Rated operational current                     | l <sub>e</sub>    | A               |   |
| 60 V  |                   | ۸               | 10  |
| Contacts                                      |                   | Quantity        | 2   |
| Rated operational current                     | l <sub>e</sub>    | Α               | 10  |
| 48 V  |                   |                 |   |
| Contacts                                      |                   | Quantity        | 1   |
| Rated operational current                     | l <sub>e</sub>    | Α               | 10  |
| 24 V  |                   |                 |   |
| DC-23A, motor load switch L/R = 15 ms         |                   |                 |   |
| Contacts                                      |                   | Quantity        | 1   |
| Rated operational current                     | I <sub>e</sub>    | Α               | 1   |
| DC-21A  | I <sub>e</sub>    | Α               |   |
| Voltage per contact pair in series            | -                 | V               | 60  |
| Rated operational current                     | I <sub>e</sub>    | Α               | 10  |
| DC-1, Load-break switches L/R = 1 ms          |                   |                 |   |
| DC  | l <sub>e</sub>    | А               | 7.0   |
| 500 V<br>690 V                                | l <sub>e</sub>    | A               | 13.3<br>7.6   |
| 400 V 415 V                                   | l <sub>e</sub>    | Α               | 13.3  |
| 230 V   | l <sub>e</sub>    | A               | 13.3  |
| Rated operational current motor load switch   |                   |                 |   |
| 690 V   | Р                 | kW              | 5.5   |
| 500 V   | Р                 | kW              | 7.5   |
| 400 V 415 V                                   | Р                 | kW              | 5.5   |
|   |                   |                 |   |

# Design verification as per IEC/EN 61439

| Technical data for design verification                   |                  |   |     |
|--|------------------|---|-----|
| Rated operational current for specified heat dissipation | In               | Α | 20  |
| Heat dissipation per pole, current-dependent             | P <sub>vid</sub> | W | 0.6 |
| Equipment heat dissipation, current-dependent            | P <sub>vid</sub> | W | 0   |

| Heat dissipation capacity  Operating ambient temperature min.  Operating ambient temperature max.  IEC/EN 61439 design verification  10.2 Strength of materials and parts  10.2.2 Corrosion resistance  10.2.3.1 Verification of thermal stability of enclosures  10.2.3.2 Verification of tresistance of insulating materials to normal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  10.8 Connections for external conductors  Pdiss  W  0  40  Weets the product standard's requirements.  Meets the product standard's requirements.  Meets the product standard's requirements.  UV resistance only in connection with protective shield.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated. |         |
|---|---------|
| Operating ambient temperature max.  IEC/EN 61439 design verification  10.2 Strength of materials and parts  10.2.2 Corrosion resistance  10.2.3.1 Verification of thermal stability of enclosures  10.2.3.2 Verification of resistance of insulating materials to normal heat  10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  **C** 40  **A0**  **Meets the product standard's requirements.  Meets the product standard's requirements.  UV resistance only in connection with protective shield.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Incorporation of switching devices and components  Is the panel builder's responsibility.   |         |
| IEC/EN 61439 design verification  10.2 Strength of materials and parts  10.2.2 Corrosion resistance  10.2.3.1 Verification of thermal stability of enclosures  10.2.3.2 Verification of resistance of insulating materials to normal heat  10.2.3.2 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  Meets the product standard's requirements.  Meets the product standard's requirements.  UV resistance only in connection with protective shield.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  |         |
| 10.2 Strength of materials and parts  10.2.2 Corrosion resistance  10.2.3.1 Verification of thermal stability of enclosures  10.2.3.2 Verification of resistance of insulating materials to normal heat  10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3.0 Egree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  Meets the product standard's requirements.  Weets the product standard's requirements witchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Incorporation of switching devices and components  Is the panel builder's responsibility.  |         |
| 10.2.2 Corrosion resistance  10.2.3.1 Verification of thermal stability of enclosures  10.2.3.2 Verification of resistance of insulating materials to normal heat  10.2.3.2 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  Meets the product standard's requirements.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Soes not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Soes not apply, since the entire switchgear needs to be evaluated.  Soes not apply, since the entire switchgear needs to be evaluated.  Soes not apply, since the entire switchgear needs to be evaluated.  Soes not apply, since the entire switchgear needs to be evaluated.  Soes not apply, since the entire switchgear needs to be evaluated.  Soes not apply, since the entire switchgear needs to be evaluated.  Soes not apply, since the entire switchgear needs to be evaluated.  Soes not apply, since the entire switchgear needs to be evaluated.  |         |
| 10.2.3.1 Verification of thermal stability of enclosures  10.2.3.2 Verification of resistance of insulating materials to normal heat  10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  Meets the product standard's requirements.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Is the panel builder's responsibility.   |         |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  UV resistance only in connection with protective shield.  10.2.5 Lifting  Does not apply, since the entire switchgear needs to be evaluated.  10.2.6 Mechanical impact  10.2.7 Inscriptions  Meets the product standard's requirements.  10.3 Degree of protection of ASSEMBLIES  Does not apply, since the entire switchgear needs to be evaluated.  10.4 Clearances and creepage distances  Meets the product standard's requirements.  10.5 Protection against electric shock  Does not apply, since the entire switchgear needs to be evaluated.  10.6 Incorporation of switching devices and components  Is the panel builder's responsibility.   |         |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Incorporation of switching devices and components  Does not apply, since the entire switchgear needs to be evaluated.  Is the panel builder's responsibility.  |         |
| and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  Does not apply, since the entire switchgear needs to be evaluated.  10.2.6 Mechanical impact  10.2.7 Inscriptions  Meets the product standard's requirements.  10.3 Degree of protection of ASSEMBLIES  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  10.4 Clearances and creepage distances  Meets the product standard's requirements.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  In the panel builder's responsibility.   |         |
| 10.2.5 Lifting  Does not apply, since the entire switchgear needs to be evaluated.  10.2.6 Mechanical impact  Does not apply, since the entire switchgear needs to be evaluated.  10.2.7 Inscriptions  Meets the product standard's requirements.  10.3 Degree of protection of ASSEMBLIES  Does not apply, since the entire switchgear needs to be evaluated.  10.4 Clearances and creepage distances  Meets the product standard's requirements.  10.5 Protection against electric shock  Does not apply, since the entire switchgear needs to be evaluated.  10.6 Incorporation of switching devices and components  Does not apply, since the entire switchgear needs to be evaluated.  10.7 Internal electrical circuits and connections  Is the panel builder's responsibility.   |         |
| 10.2.6 Mechanical impact  10.2.7 Inscriptions  Meets the product standard's requirements.  10.3 Degree of protection of ASSEMBLIES  Does not apply, since the entire switchgear needs to be evaluated.  10.4 Clearances and creepage distances  Meets the product standard's requirements.  10.5 Protection against electric shock  Does not apply, since the entire switchgear needs to be evaluated.  10.6 Incorporation of switching devices and components  Does not apply, since the entire switchgear needs to be evaluated.  10.7 Internal electrical circuits and connections  Is the panel builder's responsibility.   |         |
| 10.2.7 Inscriptions  Meets the product standard's requirements.  10.3 Degree of protection of ASSEMBLIES  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  10.6 Incorporation of switching devices and components  Does not apply, since the entire switchgear needs to be evaluated.  10.7 Internal electrical circuits and connections  Is the panel builder's responsibility.   |         |
| 10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  Meets the product standard's requirements.  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  Does not apply, since the entire switchgear needs to be evaluated.  10.7 Internal electrical circuits and connections  Is the panel builder's responsibility.  |         |
| 10.4 Clearances and creepage distances  Meets the product standard's requirements.  10.5 Protection against electric shock  Does not apply, since the entire switchgear needs to be evaluated.  10.6 Incorporation of switching devices and components  Does not apply, since the entire switchgear needs to be evaluated.  10.7 Internal electrical circuits and connections  Is the panel builder's responsibility.   |         |
| 10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  Does not apply, since the entire switchgear needs to be evaluated.  Is the panel builder's responsibility.   |         |
| 10.6 Incorporation of switching devices and components  Does not apply, since the entire switchgear needs to be evaluated.  10.7 Internal electrical circuits and connections  Is the panel builder's responsibility.   |         |
| 10.7 Internal electrical circuits and connections Is the panel builder's responsibility.  |         |
|   |         |
| 10.8 Connections for external conductors Is the panel builder's responsibility.   |         |
|   |         |
| 10.9 Insulation properties  |         |
| 10.9.2 Power-frequency electric strength Is the panel builder's responsibility.   |         |
| 10.9.3 Impulse withstand voltage Is the panel builder's responsibility.   |         |
| 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility.   |         |
| 10.10 Temperature rise  The panel builder is responsible for the temperature rise calculation. Eat provide heat dissipation data for the devices.   | n will  |
| 10.11 Short-circuit rating  Is the panel builder's responsibility. The specifications for the switchgea observed.   | must be |
| 10.12 Electromagnetic compatibility  Is the panel builder's responsibility. The specifications for the switchgea observed.  | must be |
| 10.13 Mechanical function  The device meets the requirements, provided the information in the instribution leaflet (IL) is observed.  | ction   |

## **Technical data ETIM 6.0**


Low-voltage industrial components (EG000017) / Switch disconnector (EC000216)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnector (ecl@ss8.1-27-37-14-03 [AKF060010])


| [AKI 000010])   |    |           |
|---|----|-----------|
| Version as main switch                                  |    | Yes       |
| Version as maintenance-/service switch                  |    | Yes       |
| Version as safety switch                                |    | No        |
| Version as emergency stop installation                  |    | No        |
| Version as reversing switch                             |    | No        |
| Max. rated operation voltage Ue AC                      | V  | 690       |
| Rated operating voltage                                 | V  | 690 - 690 |
| Rated permanent current lu                              | Α  | 20        |
| Rated permanent current at AC-21, 400 V                 | А  | 20        |
| Rated operation power at AC-3, 400 V                    | kW | 5.5       |
| Rated short-time withstand current lcw                  | kA | 0.32      |
| Rated operation power at AC-23, 400 V                   | kW | 5.5       |
| Switching power at 400 V                                | kW | 5.5       |
| Conditioned rated short-circuit current Iq              | kA | 6         |
| Number of poles   |    | 6         |
| Number of auxiliary contacts as normally closed contact |    | 0         |
| Number of auxiliary contacts as normally open contact   |    | 0         |
| Number of auxiliary contacts as change-over contact     |    | 0         |
| Motor drive optional                                    |    | No        |
|   |    |           |

| Motor drive integrated                        | No                         |
|---|----------------------------|
| Voltage release optional                      | No                         |
| Device construction                           | Complete device in housing |
| Suitable for ground mounting                  | Yes                        |
| Suitable for front mounting 4-hole            | No                         |
| Suitable for front mounting center            | No                         |
| Suitable for distribution board installation  | No                         |
| Suitable for intermediate mounting            | No                         |
| Colour control element                        | Black                      |
| Type of control element                       | Door coupling rotary drive |
| Interlockable                                 | Yes                        |
| Type of electrical connection of main circuit | Screw connection           |
| Degree of protection (IP), front side         | IP65                       |

# **Dimensions**

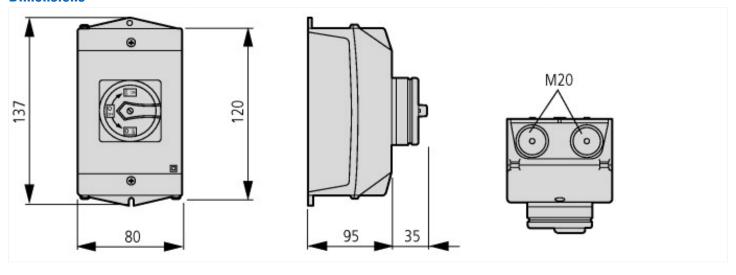

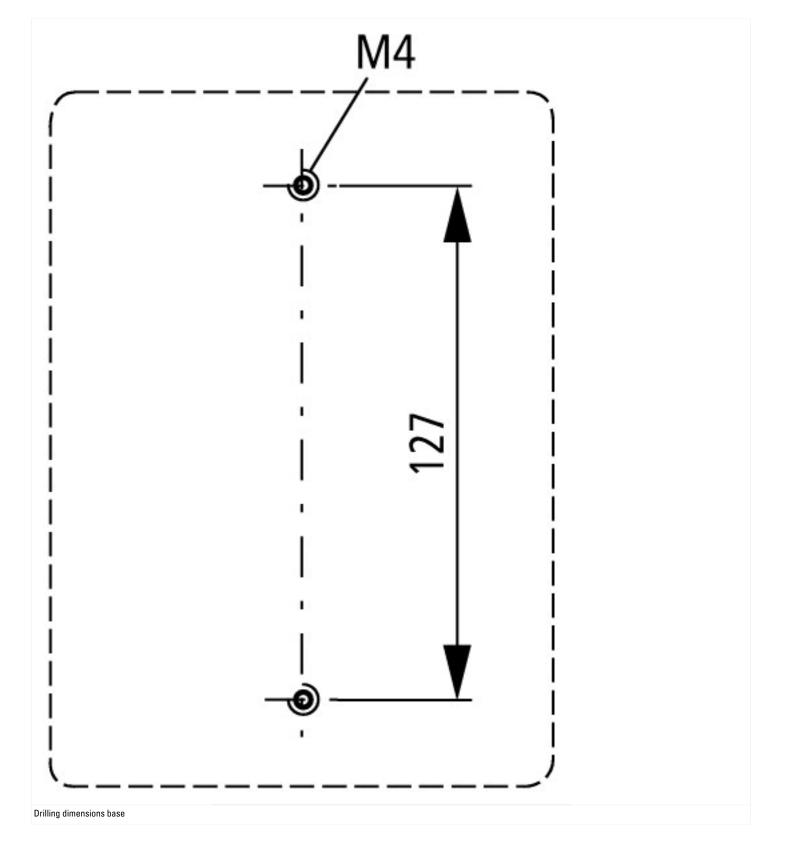

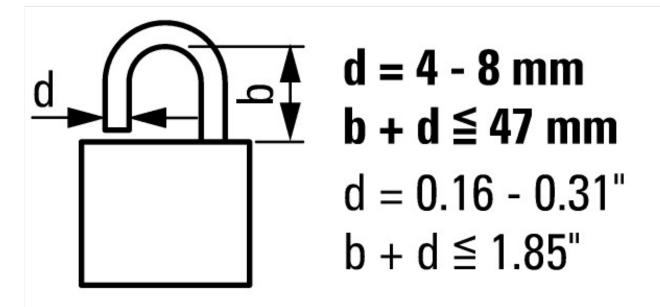

≦3 padlocks

### **Additional product information (links)**

| IL03801007Z (AWA1150-1687) Cam switch: Surf                          | face mounting enclosure  |  |
|--|--|--|
| IL03801007Z (AWA1150-1687) Cam switch:<br>Surface mounting enclosure | ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03801007Z2018_05.pdf              |  |
| Display flip catalog page.   | http://ecat.moeller.net/flip-cat/?edition=K115A&startpage=41                             |  |
| Technical overview cam switch, switch-disconnector                   | http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.2                       |  |
| System overview cam switch T   | http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.4                       |  |
| System overview switch-disconnector P                                | http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.6                       |  |
| Key to part numbers Cam switch                                       | http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8                       |  |
| Key to part numbers Switch-disconnector                              | http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8                       |  |
| Switches for ATEX  | http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html |  |
| Ordering form for SOND switches and SOND front plates(DE_EN)         | ftp://ftp.moeller.net/D0CUMENTATION/PDF/MZ008005ZU_Orderform_Customized_Switch.pdf       |  |
| Ordering form for SOND switches and SOND front plates(DE_EN)         | ftp://ftp.moeller.net/DOCUMENTATION/PDF/MZ008006ZU_Orderform_Customized_Switch.pdf       |  |