

https://www.phoenixcontact.com/pc/products/1606403

PHŒNIX

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: UC, straight, shielded: yes, Screw locking mechanism, No. of pos. : 12, Direction of rotation: Counter direction, contact connection type: Socket, Solder cup, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242125

### Commercial data

Item number	1606403
Packing unit	20 рс
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAIA
GTIN	4046356259330
Weight per piece (including packing)	95.58 g
Weight per piece (excluding packing)	90.22 g
Customs tariff number	85366990
Country of origin	DE

1606403

https://www.phoenixcontact.com/pc/products/1606403




### Technical data

### Product properties

Product type	Circular connector (cable-side)
nnector	
nsulating body	
Coding	Ν
Insertion/withdrawal cycles	50
Connection method	Solder cup
Contact switching type	Socket
Application	Signal
Number of positions	12
Direction of rotation	Counter direction
Connection profile	12
Contact diameter Power contacts	1 mm
Litz wire cross-section Power contacts min.	0.08 mm <sup>2</sup>
Litz wire cross-section Power contacts max.	1 mm <sup>2</sup>
Rated current Power contacts	8 A
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Housing	
Housing material	Metal

Housing material	Metal
Type of locking	Screw locking mechanism
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23




1606403


https://www.phoenixcontact.com/pc/products/1606403

Drawings

Schematic diagram

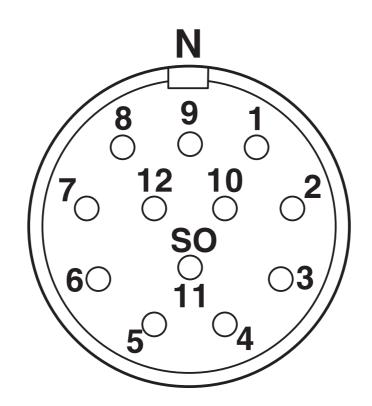

Connector pin assignment



1606403

https://www.phoenixcontact.com/pc/products/1606403



## Classifications

#### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

#### ETIM

	ETIM 8.0	EC002635	
UN	UNSPSC		
	UNSPSC 21.0	39121400	



https://www.phoenixcontact.com/pc/products/1606403



## Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
U REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	fcc6c4c5-29ee-4447-9b4d-a2bb0539b6bf

1606403

https://www.phoenixcontact.com/pc/products/1606403



### Accessories

### PROT-M23-SG-IT-IP20 - Plastic protective cap

#### 1577206

https://www.phoenixcontact.com/pc/products/1577206



Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com