

ZBF 8:UNBEDRUCKT - Zack Marker strip, flat



0808781

<https://www.phoenixcontact.com/pc/products/0808781>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

Your advantages

- The ZBF zack marker strip system with flat marker groove is a marking solution for modular terminal blocks and electronics modules
- Other pitches available on request
- Unlabeled marking strips can be custom-labeled with a plotter or by hand
- The multi-section marking strips are easy to fit and can be easily separated if required

Commercial data

Item number	0808781
Packing unit	10 pc
Minimum order quantity	10 pc
Product key	BG2112
Catalog page	Page 128 (C-3-2019)
GTIN	4017918180348
Weight per piece (including packing)	0.67 g
Weight per piece (excluding packing)	0.67 g
Customs tariff number	39269097
Country of origin	DE

ZBF 8:UNBEDRUCKT - Zack Marker strip, flat



0808781

<https://www.phoenixcontact.com/pc/products/0808781>

Technical data

Product properties

Product type	Terminal marking
Pitch	8 mm
Type	flat

Data management status

Article revision	01
------------------	----

Marking

Number of individual labels	10
Number of individual labels per row	10
Number of marker strips	10

Dimensions

Width	8 mm
Text field width	5.15 mm
Text field height	8.15 mm
Pitch	8 mm

Material specifications

Color	white
Material	PA
Flammability rating according to UL 94	V2
Components	free from silicone and halogen

Environmental and real-life conditions

UV resistance

Specification	ISO 4892-2:2013-03 (following)
---------------	--------------------------------

Wipe resistance of inscriptions

Specification	DIN EN 61010-1 (VDE 0411-1):2011-07
	DIN EN 62208 (VDE 0660-511):2012-06 (in parts)

Ambient conditions

Ambient temperature (operation)	-40 °C ... 100 °C
Recommended ambient temperature (storage/transport)	23 °C
Recommended humidity (storage/transport)	50 %

Standards and regulations


Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
-----------------	-----------------------------

Mounting

Mounting type	snapped
---------------	---------

Drawings

Schematic diagram

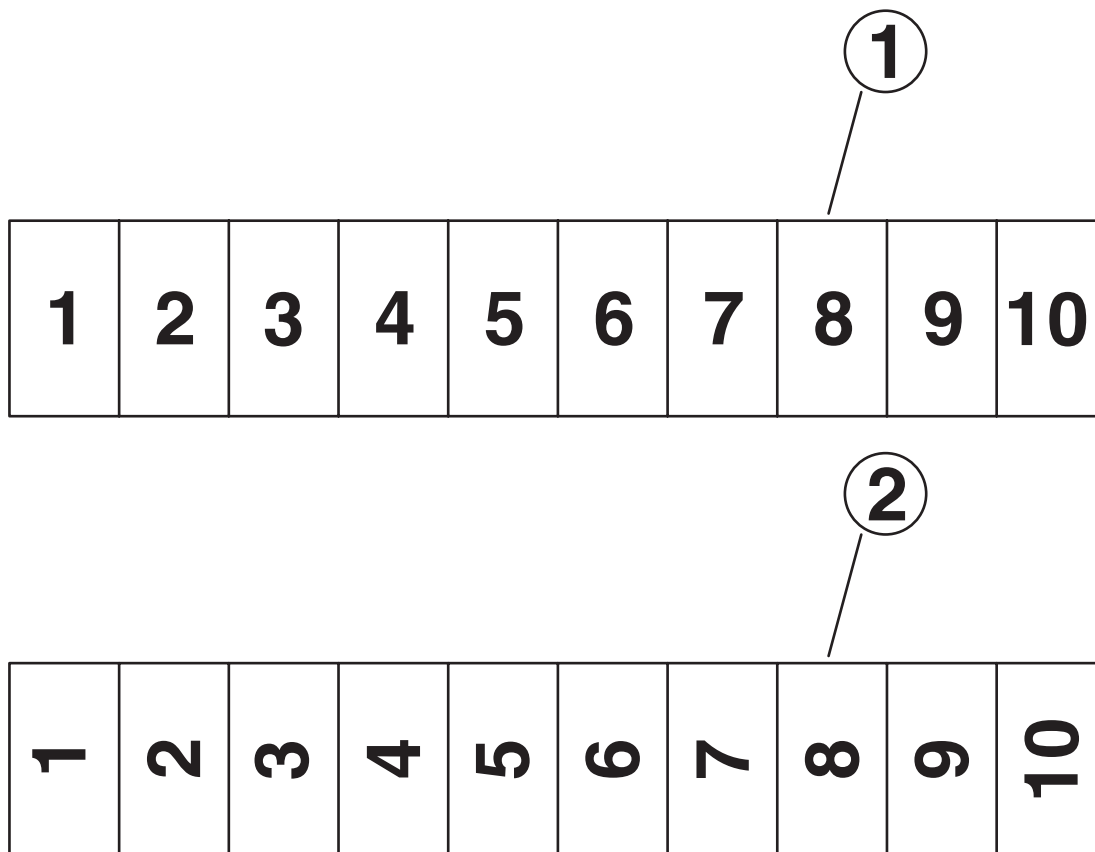

ZBF 8:UNBEDRUCKT - Zack Marker strip, flat



0808781

<https://www.phoenixcontact.com/pc/products/0808781>

Classifications

ECLASS

ECLASS-11.0	27281101
ECLASS-12.0	27281101
ECLASS-13.0	27281101

ETIM

ETIM 9.0	EC000761
----------	----------

UNSPSC

UNSPSC 21.0	39131500
-------------	----------

ZBF 8:UNBEDRUCKT - Zack Marker strip, flat



0808781

<https://www.phoenixcontact.com/pc/products/0808781>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

ZBF 8:UNBEDRUCKT - Zack Marker strip, flat

0808781

<https://www.phoenixcontact.com/pc/products/0808781>




Accessories

PLOTMARK - Marking plotter

0804499

<https://www.phoenixcontact.com/pc/products/0804499>

Marking plotter for the entire portfolio of UC marking materials and materials in sheet and strip format.




CMS-P1-PLOTTER - Marking plotter

5144615

<https://www.phoenixcontact.com/pc/products/5144615>

Marking plotter, weight: 8 kg, length: 0.66 m, width: 440 mm, height: 125 mm, color: silver



ZBF 8:UNBEDRUCKT - Zack Marker strip, flat



0808781

<https://www.phoenixcontact.com/pc/products/0808781>

CMS-P1-M/ZBF - Magazine insert

5144709

<https://www.phoenixcontact.com/pc/products/5144709>



Plastic magazines for CMS-P1-PLOTTER and PLOTMARK. For accommodating 26 flat zack marker strips or ZBN strips

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com