

V-RC/TWUM 13/KVD 13/LBL 16+3 - Cable connector



1000044

<https://www.phoenixcontact.com/us/products/1000044>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Cable connector, number of positions: 19, status display: No; master cable connection: M23 screw locking, shielding: no, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1237973



Commercial data

Item number	1000044
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAFC
Catalog page	Page 128 (PC-2009)
GTIN	4017918399870
Weight per piece (including packing)	165.8 g
Weight per piece (excluding packing)	154.2 g
Customs tariff number	85366990
Country of origin	DE

V-RC/TWUM 13/KVD 13/LBL 16+3 - Cable connector



1000044

<https://www.phoenixcontact.com/us/products/1000044>

Technical data

Notes

General	The connector is designed for use on sensor/actuator boxes with an M23 plug-in connection.
---------	--

Mounting

Connection method	Solder connection
-------------------	-------------------

Product properties

Product type	Circular connector (cable-side)
Number of positions	19

Dimensions

Dimensional drawing	
Width	26 mm
Height	51 mm
Length	78 mm

Material specifications

Material Housing	GD-Zn
Flammability rating according to UL 94	V0
Contact material	CuZn
Contact surface material	gold-plated
Contact carrier material	PBT

Connection data

Conductor connection

Connection method	Solder connection
-------------------	-------------------

Pin assignment

Slot/position = Wire color or connection	1 / 4 (A) = 15 = WH
	1 / 2 (B) = 7 = GYPK
	2 / 4 (A) = 5 = GN
	2 / 2 (B) = 4 = RDBU
	3 / 4 (A) = 16 = YE
	3 / 2 (B) = 8 = WHGN
	4 / 4 (A) = 3 = GY

V-RC/TWUM 13/KVD 13/LBL 16+3 - Cable connector



1000044

<https://www.phoenixcontact.com/us/products/1000044>

	4 / 2 (B) = 14 = BNGN
	5 / 4 (A) = 17 = PK
	5 / 2 (B) = 9 = WHYE
	6 / 4 (A) = 2 = RD
	6 / 2 (B) = 13 = YEBN
	7 / 4 (A) = 11 = BK
	7 / 2 (B) = 10 = WHGY
	8 / 4 (A) = 1 = VT
	8 / 2 (B) = 18 = GYBN
	1-8 / 1 (+ 120 V) = 19 = BN
	1-8 / 3 (0 V) = 6 = BU
	1-8 / 5 (PE) = 12 = GNYE

Electrical properties

Nominal voltage U_N	150 V
Rated current, total	10 A (with 1 mm ² conductor cross section)

Connector

Connection 2

Head design	Socket
Head cable outlet	angled
Head thread type	M23

Cable/line

Connection method	M23 screw locking
External cable diameter	10 mm ... 14 mm

Environmental and real-life conditions

Ambient conditions


Degree of protection	IP65
	IP67
Ambient temperature (operation)	-20 °C ... 80 °C

1000044

<https://www.phoenixcontact.com/us/products/1000044>

Drawings

Schematic diagram

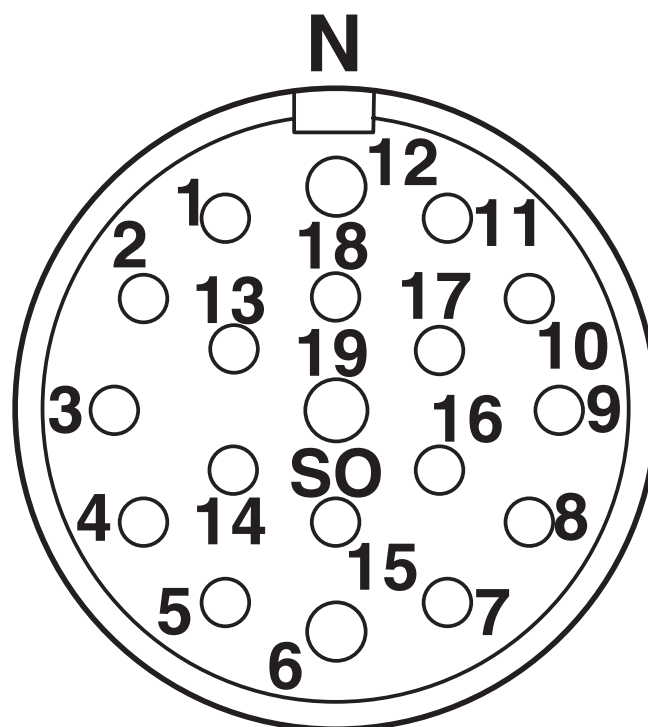

Pin assignment M23 socket, 19-pos., female side view


V-RC/TWUM 13/KVD 13/LBL 16+3 - Cable connector



1000044

<https://www.phoenixcontact.com/us/products/1000044>

Dimensional drawing

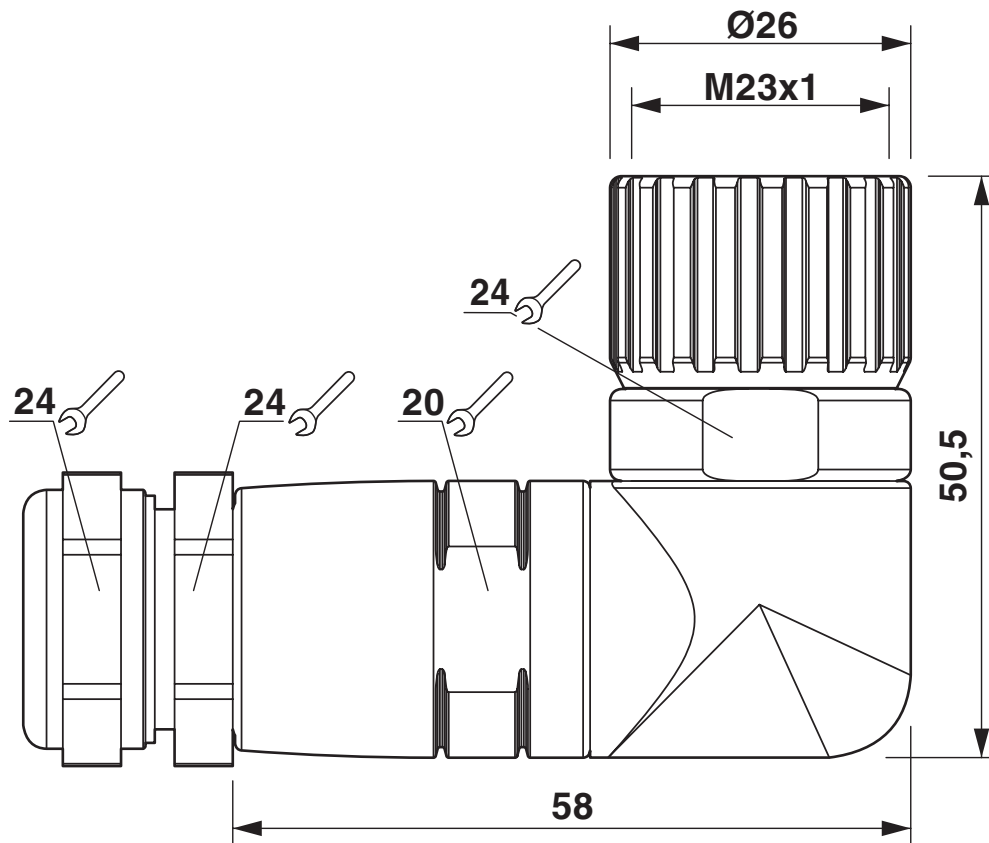

Dimensional drawing

V-RC/TWUM 13/KVD 13/LBL 16+3 - Cable connector



1000044

<https://www.phoenixcontact.com/us/products/1000044>

Classifications

ECLASS

ECLASS-11.0	27440109
ECLASS-12.0	27440109
ECLASS-13.0	27440109

ETIM

ETIM 8.0	EC003569
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

1000044
<https://www.phoenixcontact.com/us/products/1000044>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com