

SACC-E-M12FS-8CON-M16/1,0 - Panel feed-through



1400492

<https://www.phoenixcontact.com/us/products/1400492>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator flush-type socket, 8-pos., M12, A-coded, front/screw mounting with M16 thread, with 1 m TPE litz wire, 8 x 0.25 mm²

Commercial data

Item number	1400492
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	AB24
Product key	ABQCFB
GTIN	4046356497619
Weight per piece (including packing)	39.7 g
Weight per piece (excluding packing)	26.4 g
Customs tariff number	85444290
Country of origin	DE

1400492

<https://www.phoenixcontact.com/us/products/1400492>

Technical data

Product properties

Number of positions	8
No. of cable outlets	1
Shielded	no
Coding	A
Pg screw connection	M16 x 1.5

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	30 V
Nominal current I_N	2 A
Max. conductor resistance	80 mΩ/m

Connection data

Connection method	Individual wires
-------------------	------------------

Signaling

Status display	No
Status display present	No

Material specifications

Flammability rating according to UL 94	V0
Seal material	NBR
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66 GF
Material for screw connection	Zinc die-cast, nickel-plated

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Coding	A

Cable/line

SACC-E-M12FS-8CON-M16/1,0 - Panel feed-through



1400492

<https://www.phoenixcontact.com/us/products/1400492>

Cable length	1 m
Cable type	TPE litz wire
Wire diameter incl. insulation	1.15 mm ±0.07 mm
Single wire, color	brown, blue, white, gray, pink, green, yellow, red
Cable cross section	0.25 mm ²
Conductor structure signal line	14x 0.15 mm
AWG signal line	24
Thickness, insulation	0.21 mm
Nominal voltage, cable	300 V
Test voltage, cable	2000 V AC
Cable resistance	≤ 80 mΩ/m
Cable insulation resistance	≥ 20 MΩ*km

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-25 °C ... 90 °C (cable, fixed installation)

Mounting

Mounting type	Front mounting, M16 x 1.5 thread
---------------	----------------------------------

SACC-E-M12FS-8CON-M16/1,0 - Panel feed-through




1400492

<https://www.phoenixcontact.com/us/products/1400492>


Drawings

Dimensional drawing

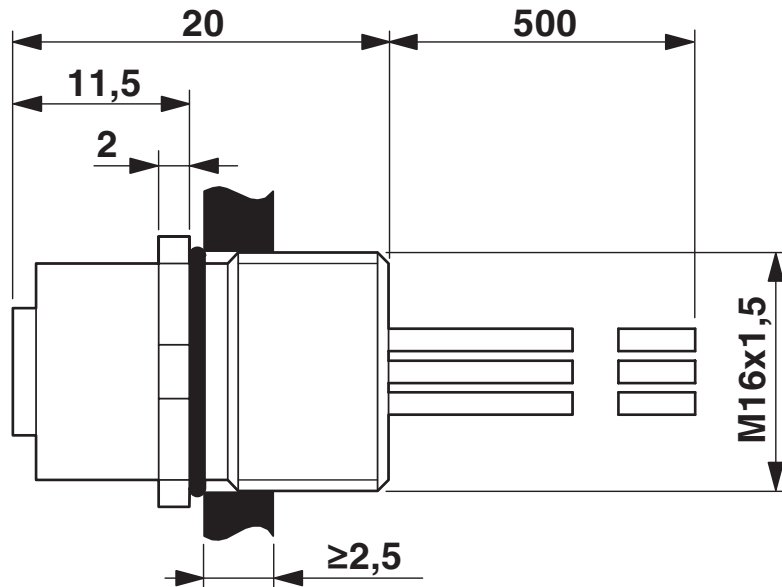

M12 flush-type connector

Circuit diagram

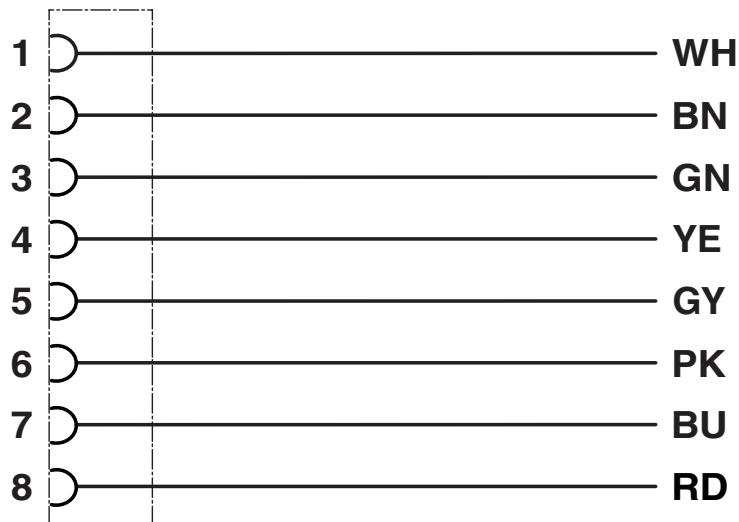


SACC-E-M12FS-8CON-M16/1,0 - Panel feed-through



1400492

<https://www.phoenixcontact.com/us/products/1400492>

Schematic diagram

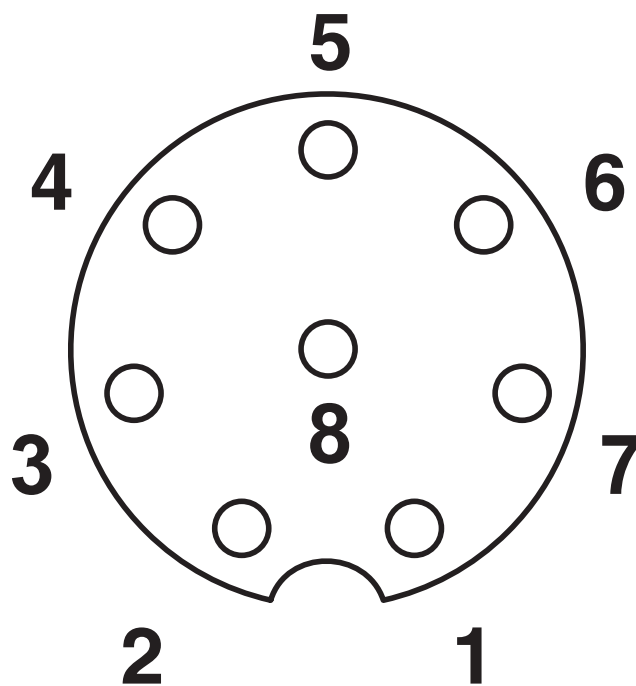

Pin assignment M12 socket, 8-pos., A-coded, view female side

SACC-E-M12FS-8CON-M16/1,0 - Panel feed-through



1400492

<https://www.phoenixcontact.com/us/products/1400492>

Classifications

ECLASS

ECLASS-11.0

27440102

ETIM

ETIM 8.0

EC002635

UNSPSC

UNSPSC 21.0

39121400

1400492

<https://www.phoenixcontact.com/us/products/1400492>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

SACC-E-M12FS-8CON-M16/1,0 - Panel feed-through



1400492

<https://www.phoenixcontact.com/us/products/1400492>

Accessories

SACC-E-MU-M16 - Flat nut

1504097

<https://www.phoenixcontact.com/us/products/1504097>

Flat nut, Screw mounting, M16 x 1.5, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239863



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com