

HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing



1413362

<https://www.phoenixcontact.com/us/products/1413362>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON ADVANCE sleeve housing, B6, with stainless steel screw locking (Allen screw), salt-water-resistant aluminum, height 74 mm, with 1x M20 thread, straight cable outlet, without surface; conductive seal (EMC properties)

Commercial data

Item number	1413362
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF58
Product key	BF7APH
Catalog page	Page 597 (C-2-2019)
GTIN	4055626029955
Weight per piece (including packing)	209.6 g
Weight per piece (excluding packing)	209 g
Customs tariff number	85389099
Country of origin	PL

Technical data

Notes

General	For contact inserts HC-B6, BB10, DD24, M
---------	--


Product properties

Product type	Housing with screw locking
Housing type	Sleeve housing
Product family	HC-ADV
Application	Offshore/EMC
Type	B6
No. of cable outlets	1
Type of the screw connection	1x M20
Type	Low design
Fixing screws	M6 (screw head: 5 mm Allen screw)
Cable outlet	straight
Pg screw connection	none

Connection data

Tightening torque	3 Nm ... 5 Nm (for M6 mounting screws on the sleeve housing)
-------------------	--

Dimensions

Dimensional drawing	
Width	57 mm
Height	74 mm
Length	92 mm

Installation dimensions

Width of the assembly cutout	35 mm
Length of the assembly cutout	52 mm

Material specifications

Seal material	NBR, conductive
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Locking latch material	Stainless steel

Environmental and real-life conditions

Ambient conditions

IP66

1413362

<https://www.phoenixcontact.com/us/products/1413362>

Degree of protection	IP68 (0.2 bar/24 h)
	IP69 (ISO 20653:2013-02)
Enclosure rating (NEMA)	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)
Impact strength	IK09
Ambient temperature (operation)	-40 °C ... 125 °C

Mechanical properties

Mechanical data


Type of the screw connection	1x M20
Locking type	Screw

Mounting

Assembly note	In order to guarantee that the protective conductor contact functions even when plugged in at an angle, the two panel-mount flanges must have sufficient electrical contact with the metal mounting panel.
Fixing screws	M6 (screw head: 5 mm Allen screw)

Drawings

Dimensional drawing

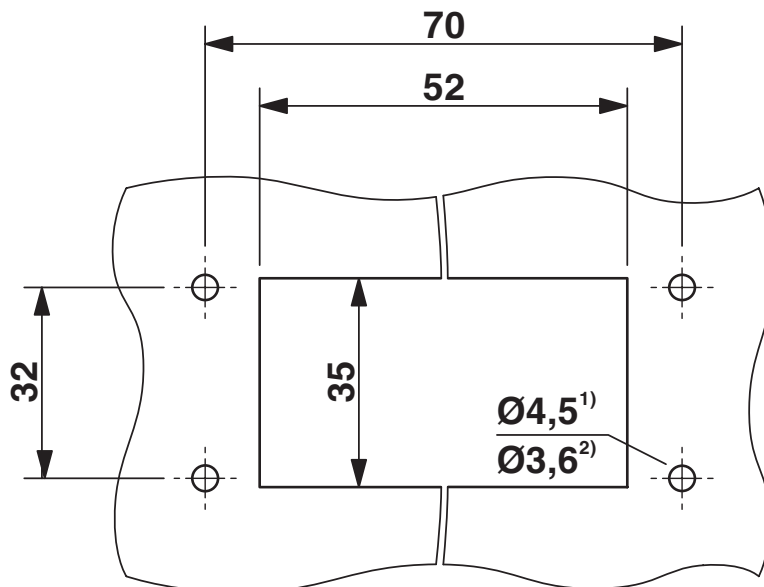


Mounting cutout

1) when M4 screws are used

2) when self-tapping Torx® screws are used (Torx® 20, M4)

Dimensional drawing

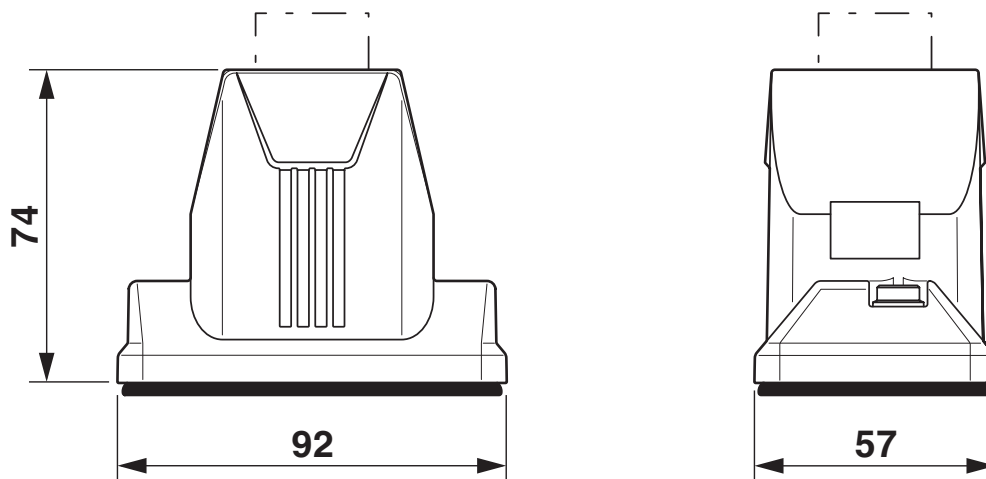

Dimensional drawing

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1413362>

**DNV**
Approval ID: TAE000037S

**cUL Recognized**
Approval ID: E255026

**UL Recognized**
Approval ID: E255026

**EAC**
Approval ID: RU C-DE.AI30.B.01102

**EAC**
Approval ID: RU C-DE.BL08.B.00511

cULus Recognized

1413362

<https://www.phoenixcontact.com/us/products/1413362>

Classifications

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

ETIM

ETIM 9.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing



1413362

<https://www.phoenixcontact.com/us/products/1413362>

Accessories

HC-B-AF - Panel-mount flange

1686533

<https://www.phoenixcontact.com/us/products/1686533>



Panel-mount flange for HEAVYCON ADVANCE housing

HC-B-AF-SET - Panel-mount flange

1604638

<https://www.phoenixcontact.com/us/products/1604638>



Panel-mount flange for HEAVYCON ADVANCE housing, set consisting of:
2 panel-mount flanges with 4 self-tapping screws (M4, Torx®) and 4 fan-type washers

HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing



1413362

<https://www.phoenixcontact.com/us/products/1413362>

HC-B 6-TMS-SD-IP50 - Protective cover

1690736

<https://www.phoenixcontact.com/us/products/1690736>



Protective cover B6, with clip locking, protective cover material: PA, height: 31.2 mm, seal: no, with lanyard

HC-B 6-TMS-SD-IP66 - Protective cover

1411494

<https://www.phoenixcontact.com/us/products/1411494>



HEAVYCON ADVANCE, IP66, B6 protective cover for panel mounting side, with screw locking, with retaining cord, diameter of retaining cord eyelet: 3 mm

HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing



1413362

<https://www.phoenixcontact.com/us/products/1413362>

G-INS-M20-S68N-PNES-GY - Cable gland

1411125

<https://www.phoenixcontact.com/us/products/1411125>



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver-grey RAL 7001

G-INS-M20-S68N-NNES-S - Cable gland

1411163

<https://www.phoenixcontact.com/us/products/1411163>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver, with O-ring

HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing



1413362

<https://www.phoenixcontact.com/us/products/1413362>

HC-M-KV-M20(11-16) - Cable gland

1645998

<https://www.phoenixcontact.com/us/products/1645998>



Metal screw connection up to 5 bar, thread length: 6 mm, cable diameter: 11 - 16 mm, WAF 27, screw connection: M20

HC-M-KV-M20(1ASI) - Cable gland

1584017

<https://www.phoenixcontact.com/us/products/1584017>



Metal screw connection for an AS-Interface flat-ribbon conductor, thread type M20

HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing



1413362

<https://www.phoenixcontact.com/us/products/1413362>

US-EMLP-HA (20X9) - Plastic label

0830989

<https://www.phoenixcontact.com/us/products/0830989>



Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70

US-EMLP-HA (20X9) CUS - Plastic label

0830995

<https://www.phoenixcontact.com/us/products/0830995>



Plastic label, Card, white, labeled, can be labeled with: THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70

HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing

1413362

<https://www.phoenixcontact.com/us/products/1413362>



WP-G HF IP66 M20 BK - Screw connection

3240898

<https://www.phoenixcontact.com/us/products/3240898>



Cable gland, metric thread, IP66 protection, straight

WP-G HF IP69K M20 BK - Screw connection

3240884

<https://www.phoenixcontact.com/us/products/3240884>



Cable gland, metric thread, IP68/69k protection, straight

HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing

1413362

<https://www.phoenixcontact.com/us/products/1413362>



WP-GA HF IP66 M20 BK - Screw connection

3240926

<https://www.phoenixcontact.com/us/products/3240926>

Cable gland, metric thread, IP66 protection, angled



WP-GA HF IP69K M20 BK - Screw connection

3240912

<https://www.phoenixcontact.com/us/products/3240912>

Cable gland, metric thread, IP68/69k protection, angled



HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing



1413362

<https://www.phoenixcontact.com/us/products/1413362>

WP-GR HF IP66 M20 BK - Screw connection

3240954

<https://www.phoenixcontact.com/us/products/3240954>



Cable gland, metric thread, IP66 protection, with strain relief

WP-GR HF IP69K M20 BK - Screw connection

3240940

<https://www.phoenixcontact.com/us/products/3240940>



Cable gland, metric thread, IP68/69k protection, with strain relief

HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing



1413362

<https://www.phoenixcontact.com/us/products/1413362>

WP-G PP HF M20 - Screw connection

3240998

<https://www.phoenixcontact.com/us/products/3240998>

Cable gland made from PP with metric thread, IP65 protection



WP-GT PP HF M20 - Screw connection

3241012

<https://www.phoenixcontact.com/us/products/3241012>

Cable gland made from PP with metric thread, rotatable, IP54 protection



HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing



1413362

<https://www.phoenixcontact.com/us/products/1413362>

WP-G BRASS IP40 M20 - Screw connection

3241047

<https://www.phoenixcontact.com/us/products/3241047>

Cable gland made from brass with metric thread, IP40 protection



WP-GT BRASS M20 - Screw connection

3241033

<https://www.phoenixcontact.com/us/products/3241033>

Cable gland made from brass with metric thread, rotatable, IP40 protection



HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing



1413362

<https://www.phoenixcontact.com/us/products/1413362>

WP-G BRASS IP65 M20 - Screw connection

3241061

<https://www.phoenixcontact.com/us/products/3241061>



Cable gland made from brass with metric thread, IP65 protection

SF-BIT-HEXB 5-89 - Screw insert

1208911

<https://www.phoenixcontact.com/us/products/1208911>



Screw bit, hexagonal with ball head, E6.3-1/4" drive, size: Hex 5 x 89 mm, hardened, suitable for holder according to DIN 3126-F 6.3/ISO 1173

HC-ADV-B06-HLWH-1TTM20-EMC-AL - Housing



1413362

<https://www.phoenixcontact.com/us/products/1413362>

SF-M BH - Screwdriver

1212070

<https://www.phoenixcontact.com/us/products/1212070>



Bit screwdriver, with 1/4" quick-action chuck, handle length 119 mm, 2-component handle, with non-slip grip, suitable for bits according to DIN 3126-C 6.3 and E 6.3/ISO 1173, magnetic

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com