

# SAC-4P- 2,0-U20/MINFS - Power cable



1416798

<https://www.phoenixcontact.com/us/products/1416798>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position, PVC, yellow, free cable end, on Socket straight 7/8"-16UNF, coding: A, cable length: 2 m

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components

## Commercial data

Item number	1416798
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	BF14
Product key	BF1IMB
GTIN	4055626223667
Weight per piece (including packing)	22.22 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85444290
Country of origin	MX

# SAC-4P- 2,0-U20/MINFS - Power cable



1416798

<https://www.phoenixcontact.com/us/products/1416798>

## Technical data

### Notes

#### Trade restriction

CE note	The products are offered exclusively for export outside the EU and the European Economic Area.
---------	--

### Product properties

Product type	Sensor/actuator cable
Application	Standard
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	A

### Material specifications

Flammability rating according to UL 94	V0
Material of grip body	PVC
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PVC
Material for screw connection	Anodized aluminum

### Electrical properties

Insulation resistance	≥ 100 MΩ
Nominal voltage $U_N$	600 V AC
	600 V DC
Nominal current $I_N$	10 A

### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	100
-----------------------------	-----

### Signaling

Status display	No
Status display present	No

### Connection data

#### Conductor connection

Tightening torque	10 lb <sub>f</sub> -in.
	1.12 Nm

### Connector

# SAC-4P- 2,0-U20/MINFS - Power cable



1416798

<https://www.phoenixcontact.com/us/products/1416798>

## Connection 1

Type	free cable end
------	----------------

## Connection 2

Type	Socket straight 7/8"-16UNF
Number of positions	4
Coding type	A

## Cable/line

Cable length	2 m
--------------	-----

## Yellow, STOOW [U20]

Number of positions	4
Shielded	no
Cable type	Yellow, STOOW [U20]
Conductor cross section	4 x AWG 16
External cable diameter	10.70 mm
Outer sheath, material	PVC
External sheath, color	yellow
Conductor material	Bare Cu litz wires
Single wire, color	black 1, white 2, red 3, green 4
Nominal voltage, cable	600 V
Minimum bending radius, fixed installation	4 x D
Minimum bending radius, flexible installation	12.5 x D
Smallest bending radius, fixed installation	43 mm
Smallest bending radius, movable installation	134 mm
Flame resistance	UL 1581, FT2
Resistance to oil	Premium oil resistance (jacket and conductor)
Other resistance	UV resistant (720 h) (UL 2556)
Ambient temperature (operation)	-40 °C ... 105 °C (cable, fixed installation)
	-30 °C ... 105 °C (Cable, flexible installation)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP68
Ambient temperature (operation)	-20 °C ... 105 °C (Plug / socket)
	-40 °C ... 105 °C (cable, fixed installation)
	-30 °C ... 105 °C (Cable, flexible installation)

SAC-4P- 2,0-U20/MINFS - Power cable


1416798

<https://www.phoenixcontact.com/us/products/1416798>




Drawings

Dimensional drawing

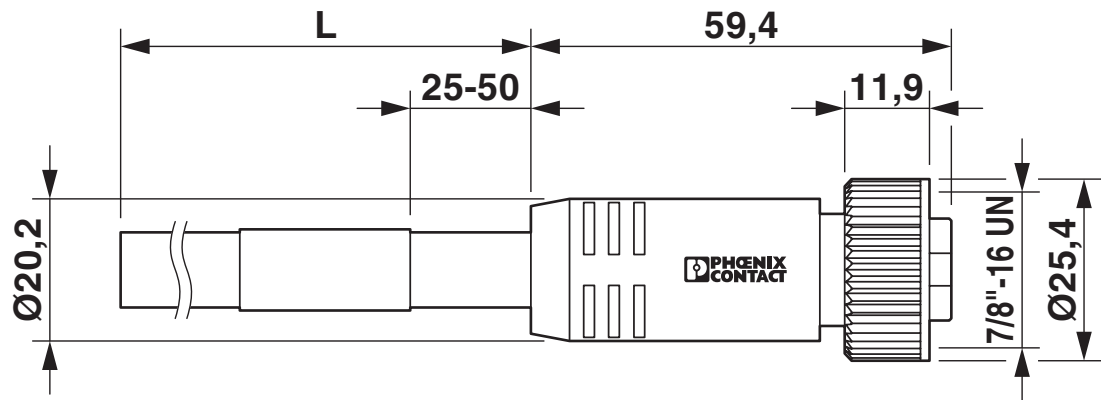


7/8"-16UNF socket, straight

Schematic diagram

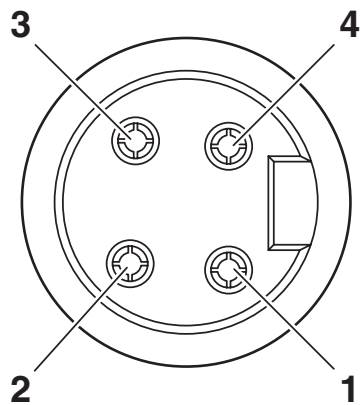

Pin assignment, socket, 7/8"-16UNF, 4-pos., view of female side

Circuit diagram

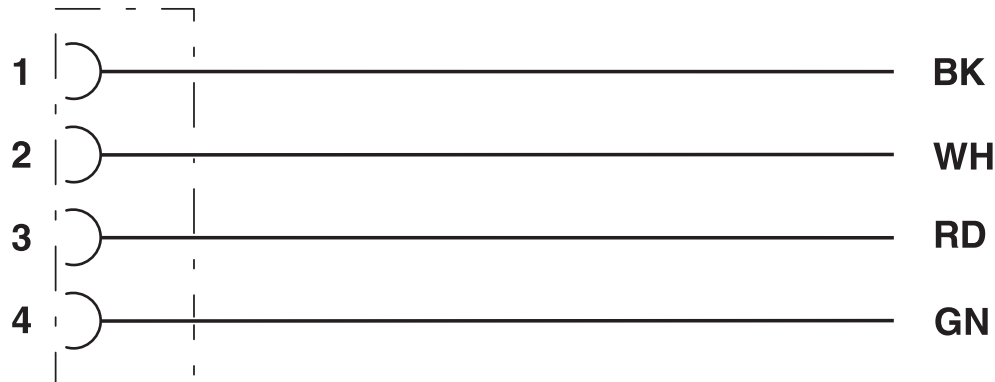

# SAC-4P- 2,0-U20/MINFS - Power cable




1416798


<https://www.phoenixcontact.com/us/products/1416798>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1416798>



**UL Listed**  
Approval ID: FILE E 221474



**cUL Listed**  
Approval ID: FILE E 221474

**cULus Listed**

# SAC-4P- 2,0-U20/MINFS - Power cable



1416798

<https://www.phoenixcontact.com/us/products/1416798>

## Classifications

### ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

### UNSPSC

UNSPSC 21.0	31251501
-------------	----------

# SAC-4P- 2,0-U20/MINFS - Power cable



1416798

<https://www.phoenixcontact.com/us/products/1416798>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Not applicable, Not qualified for the European market
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)