

# SACC-CI-M12MST-4CON-L180 TOR - Contact carrier



1418339

<https://www.phoenixcontact.com/pc/products/1418339>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, Power, 4-position, Pin, straight, M12, coding: T, PCB mounting, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239187

## Your advantages

- For compact devices: transmit high power in a confined space
- Reduced mounting costs thanks to two-piece device connector
- Packaging available for automated pick and place assembly
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate
- Additional gasket for the device when not plugged in

## Commercial data

Item number	1418339
Packing unit	60 pc
Minimum order quantity	60 pc
Note	Made to order (non-returnable)
Product key	ABQAGP
GTIN	4055626170640
Weight per piece (including packing)	10.916 g
Weight per piece (excluding packing)	5.59 g
Customs tariff number	85366990
Country of origin	DE

## Technical data

### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

### Product properties

Product type	Contact insert
Application	Power
Sensor type	Power
Number of positions	4
Seal present	yes
Shielded	no
Coding	T
Thread type	M12

### Data management status

Article revision	03
------------------	----

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	1.5 kV
Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq$
Nominal voltage $U_N$	63 V
Nominal current $I_N$	12 A

### Connection data

Connection method	THR solder connection
-------------------	-----------------------

### Interfaces

Signal type/category	Power
----------------------	-------

### Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 4T

# SACC-CI-M12MST-4CON-L180 TOR - Contact carrier



1418339

<https://www.phoenixcontact.com/pc/products/1418339>

## Connector

### Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M12
Coding	T

## Cable/line

Signal type/category	Power
----------------------	-------

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67 (correctly plugged in and locked)
	IP67, when plugged in
Ambient temperature (operation)	-25 °C ... 105 °C
	-40 °C ... 105 °C (without mechanical actuation)

## Standards and regulations

### M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111
Note	In line with

## Mounting


Mounting type	PCB mounting
---------------	--------------

## Packaging specifications

Type of packaging	Belt
Delivery state	with assembly pad

## Drawings

Schematic diagram

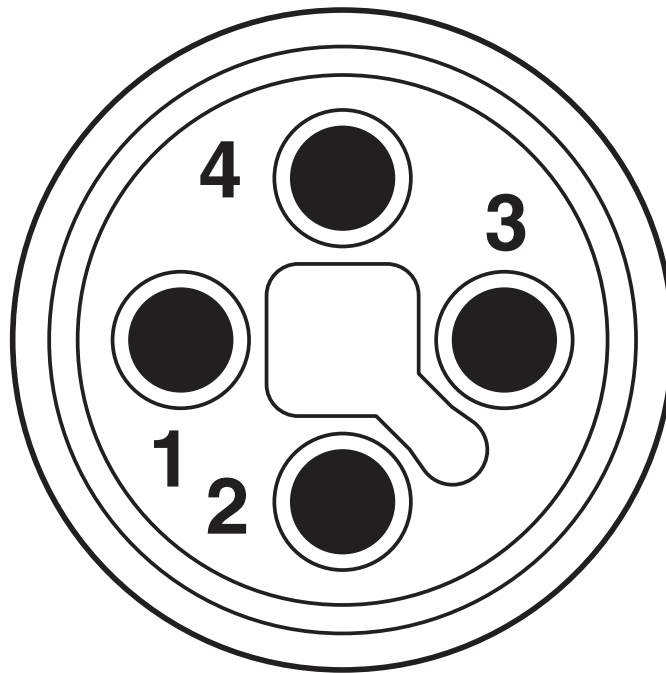

Connector pin assignment of M12 plug, 4-pos., T-coded, view of pin side

# SACC-CI-M12MST-4CON-L180 TOR - Contact carrier





1418339

<https://www.phoenixcontact.com/pc/products/1418339>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1418339>

 <b>cUL Recognized</b> Approval ID: E468743-20190917				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	63 V	12 A	16 - 16	-

 <b>UL Recognized</b> Approval ID: E468743-20190917				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	63 V	12 A	16 - 16	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# SACC-CI-M12MST-4CON-L180 TOR - Contact carrier



1418339

<https://www.phoenixcontact.com/pc/products/1418339>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27460201

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

1418339

<https://www.phoenixcontact.com/pc/products/1418339>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	87cd64f0-1100-4d7b-a07d-897027e6c2af

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)