

HC-STA-D07-CHWSCF-1TGM20-PL-BK - Housing



1419261
<https://www.phoenixcontact.com/no/products/1419261>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupling housings D7, with single locking latch, material: PA, protective cover material: PA, cable outlets: 1, straight, M20, height: 76 mm, cable gland: with, protective cover: yes, Standard, for socket inserts

Commercial data

Item number	1419261
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	31BBF
Product key	BF7APD
Catalog page	Page 516 (C-2-2019)
GTIN	4055626160122
Weight per piece (including packing)	36.2 g
Weight per piece (excluding packing)	36.2 g
Customs tariff number	85389099
Country of origin	CN

Technical data


Notes

General	for contact inserts HC-A03, A04, D07, D08, Q02, Q03, Q04, Q05, Q07, Q12
---------	---

Product properties

Type	D7
Product type	Housing with locking latch
Product family	HC-STA-D07
Application	Standard
No. of cable outlets	1
Type of the screw connection	M20
Housing type	Coupling housings
Protective cover	yes
Shielded	no
Cable outlet	straight
Pg screw connection	with

Dimensions

Dimensional drawing	
Width	34.2 mm
Height	76 mm
Length	24.2 mm

Material specifications

Flammability rating according to UL 94	V0 (Housing)
	V0 (Interlock)
	V0 (Protective cover)
Material, protective cover	PA
Locking latch material	PA
Impact strength	IK06
Housing material	PA

Mechanical properties

Mechanical data

Type of the screw connection	M20
Locking type	Latch

HC-STA-D07-CHWSCF-1TGM20-PL-BK - Housing



1419261

<https://www.phoenixcontact.com/no/products/1419261>

Cable/line

External cable diameter ()	4 mm ... 10 mm
-----------------------------	----------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66 (when plugged in or with locked protective cover)
Impact strength	IK06
Ambient temperature (operation)	-40 °C ... 125 °C

HC-STA-D07-CHWSCF-1TGM20-PL-BK - Housing


1419261

<https://www.phoenixcontact.com/no/products/1419261>



Drawings

Dimensional drawing

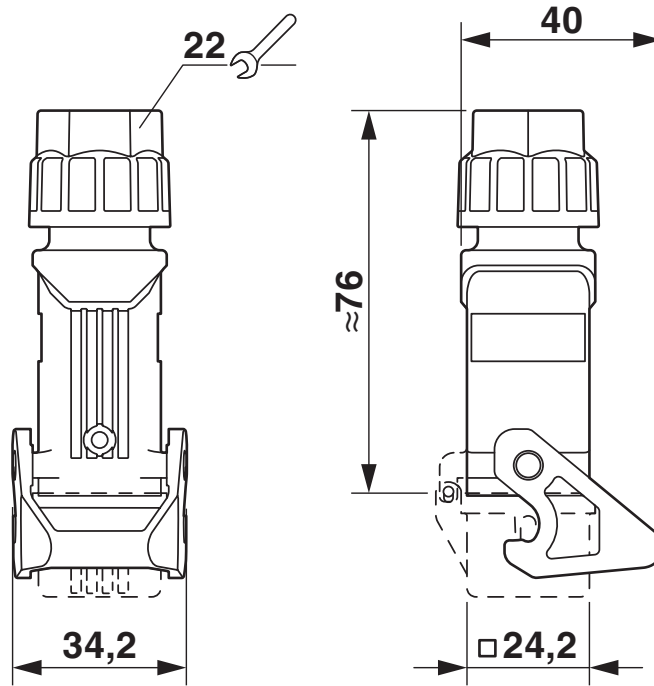

Dimensional drawing

HC-STA-D07-CHWSCF-1TGM20-PL-BK - Housing



1419261

<https://www.phoenixcontact.com/no/products/1419261>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/no/products/1419261>

DNV

Approval ID: TAE000037S



EAC

Approval ID: RU C-DE.BL08.B.00511

Classifications

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

ETIM

ETIM 9.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT AS
Strømsveien 344
N-1081 Oslo
+47 22 07 68 00
norge@phoenixcontact.com