


SAC-4P-M12MRS/7,62-PUR PE SH - Power cable



1420081

<https://www.phoenixcontact.com/gb/products/1420081>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position, PUR halogen-free, orange RAL 2003, shielded (Advanced Shielding Technology), Plug angled M12, coding: S, on free cable end, cable length: 7.62 m, for AC current up to 12 A/690 V

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Protection against incorrect connection using special S-coding
- Our standard: robust halogen-free PUR cable
- Shield power reliably – 360° shielding to reduce electromagnetic loads

Commercial data

Item number	1420081
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF1CCP
Product key	BF1CCP
GTIN	4055626206998
Weight per piece (including packing)	1,134.9 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85444290
Country of origin	PL

SAC-4P-M12MRS/7,62-PUR PE SH - Power cable



1420081

<https://www.phoenixcontact.com/gb/products/1420081>

Technical data

Product properties

Product type	Power cable
Application	Power supply
Number of positions	4
No. of cable outlets	1
Shielded	yes
Coding	S

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Material of grip body	PP
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	690 V AC
Nominal current I_N	12 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Connector

Connection 1

Type	Plug angled M12
Coding type	S (Power)

Connection 2

Type	free cable end
------	----------------

Cable/line

Cable length	7.62 m
--------------	--------


PUR halogen-free orange shielded [PUR]

SAC-4P-M12MRS/7,62-PUR PE SH - Power cable



1420081

<https://www.phoenixcontact.com/gb/products/1420081>

Dimensional drawing	
UL AWM Style	20234 / 10492 (80°C/1000 V)
Number of positions	4
Shielded	yes
Cable type	PUR halogen-free orange shielded [PUR]
Conductor cross section	4x 1.5 mm²
Wire diameter incl. insulation	≤ 2.5 mm
External cable diameter	9.70 mm ±0.3 mm
Outer sheath, material	PUR
External sheath, color	orange RAL 2003
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	black 1, black 2, black 3, green/yellow
Thickness, insulation	0.40 mm
Thickness, outer sheath	1.20 mm
Overall twist	4 wires optimally twisted
Max. conductor resistance	≤ 13.3 Ω/km (at 20 °C)
Insulation resistance	≥ 10 MΩ*km (at 20 °C)
Nominal voltage, cable	1000 V AC
Test voltage	4260 V AC (5 min.)
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	7.5 x D
Smallest bending radius, fixed installation	49 mm
Smallest bending radius, movable installation	73 mm
Max. bending cycles	4000000
Torsion force	± 25 °/m
Halogen-free	according to VDE 0282-13 Appendix C
Flame resistance	in accordance with EN 60332-1-2 in acc. to UL 1581 VW1 According to CSA C 22.2 No. 210-05 FT1
Resistance to oil	in accordance with DIN EN 60811-2-1 According to DIN EN 50363-10-2
Other resistance	UV resistant Low adhesion
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation) -30 °C ... 90 °C (Cable, flexible installation)

SAC-4P-M12MRS/7,62-PUR PE SH - Power cable



1420081

<https://www.phoenixcontact.com/gb/products/1420081>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67 (without preloading, as additional test in accordance with IEC 60529)
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)

Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111

SAC-4P-M12MRS/7,62-PUR PE SH - Power cable


1420081

<https://www.phoenixcontact.com/gb/products/1420081>




Drawings


Dimensional drawing

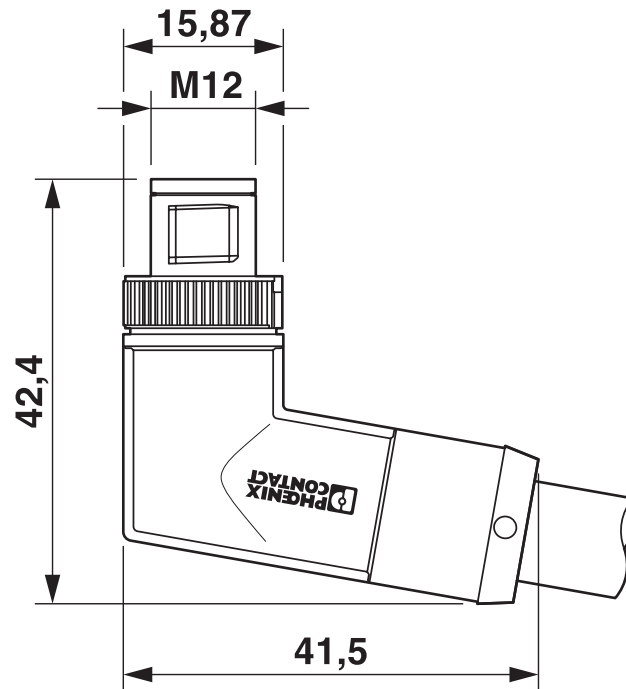

M12 x 1 male plug, angled


Circuit diagram

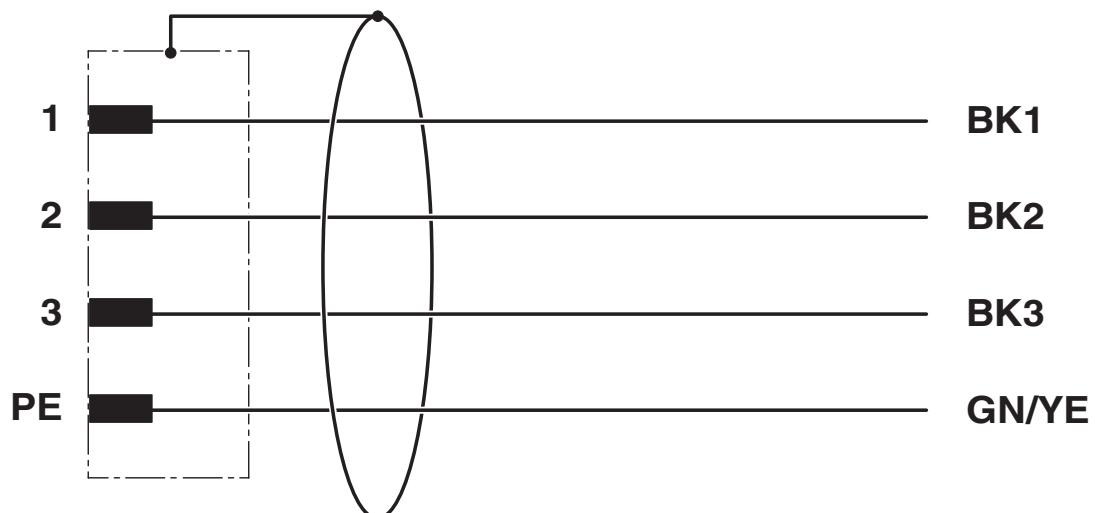

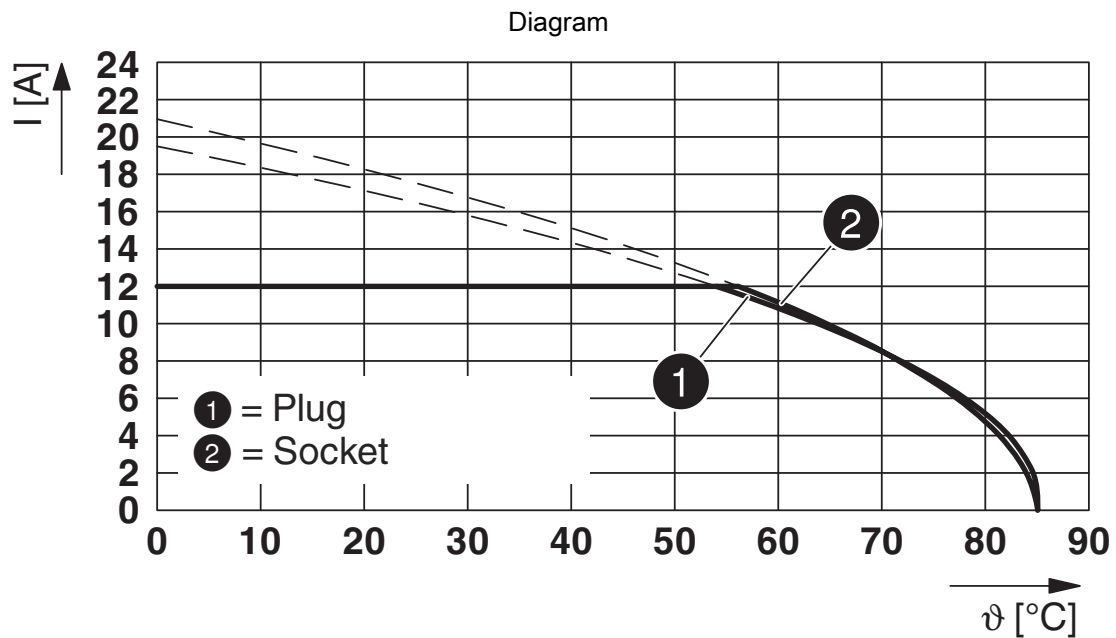

Base curve

Schematic diagram

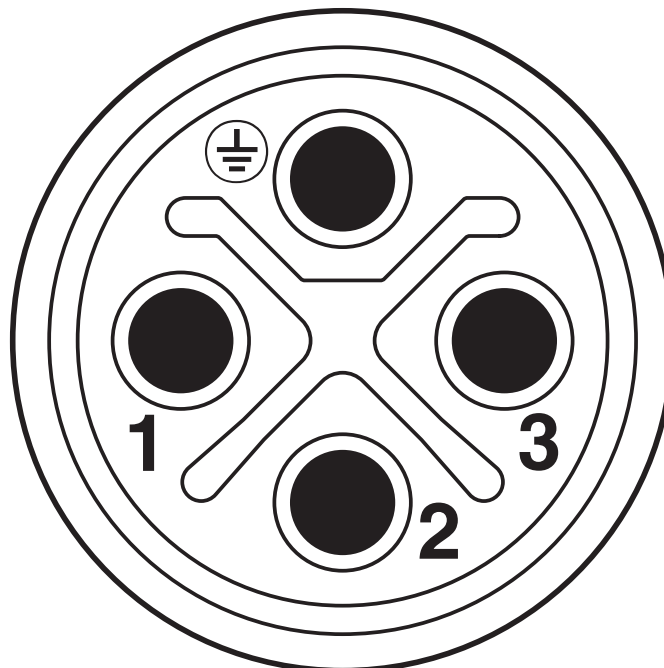

M12 plug pin assignment, 4-pos., S-coded, plug side view

SAC-4P-M12MRS/7,62-PUR PE SH - Power cable



1420081

<https://www.phoenixcontact.com/gb/products/1420081>

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-13.0	27060327

ETIM

ETIM 8.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

SAC-4P-M12MRS/7,62-PUR PE SH - Power cable



1420081

<https://www.phoenixcontact.com/gb/products/1420081>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk