

# SACC-CI-M12FSY-8CON-L90 - Contact carrier



1424193

<https://www.phoenixcontact.com/us/products/1424193>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier CAT5 (IEC 11801:2002), 8-position, Socket, angled, M12, coding: Y, PCB mounting, Wave soldering, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239450

## Your advantages

- Reduced mounting costs thanks to two-piece device connector
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate

## Commercial data

Item number	1424193
Packing unit	20 pc
Minimum order quantity	20 pc
Sales key	AB23
Product key	ABQAHS
Catalog page	Page 91 (C-2-2013)
GTIN	4046356692878
Weight per piece (including packing)	7.028 g
Weight per piece (excluding packing)	6.47 g
Customs tariff number	85366990
Country of origin	DE

# SACC-CI-M12FSY-8CON-L90 - Contact carrier



1424193

<https://www.phoenixcontact.com/us/products/1424193>

## Technical data

### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

### Product properties

Product type	Contact insert
Application	Hybrid
Number of positions	8
Seal present	no
Shielded	yes
Coding	Y
Thread type	M12

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	< 3 mΩ
Nominal voltage $U_N$	48 V AC (Power and data) 50 V DC (Power and data)
Nominal current $I_N$	0.5 A (Data) 6 A (Power)
Transmission medium	Copper
Transmission characteristics (category)	CAT5 (IEC 11801:2002)

### Connection data

Connection method	Wave soldering
-------------------	----------------

### Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Gold
Contact carrier material	PPA

### Connector

#### Connection 1

Head design	Socket
-------------	--------

# SACC-CI-M12FSY-8CON-L90 - Contact carrier



1424193

<https://www.phoenixcontact.com/us/products/1424193>

Head cable outlet	angled
Head thread type	M12
Coding	Y

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	-------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67 (When plugged in)
	IP67, when plugged in
Ambient temperature (operation)	-40 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)
	-25 °C ... 85 °C (Cable, flexible installation)
	-40 °C ... 85 °C (cable, fixed installation)

## Mounting

Mounting type	PCB mounting
---------------	--------------


# SACC-CI-M12FSY-8CON-L90 - Contact carrier



1424193

<https://www.phoenixcontact.com/us/products/1424193>

## Drawings

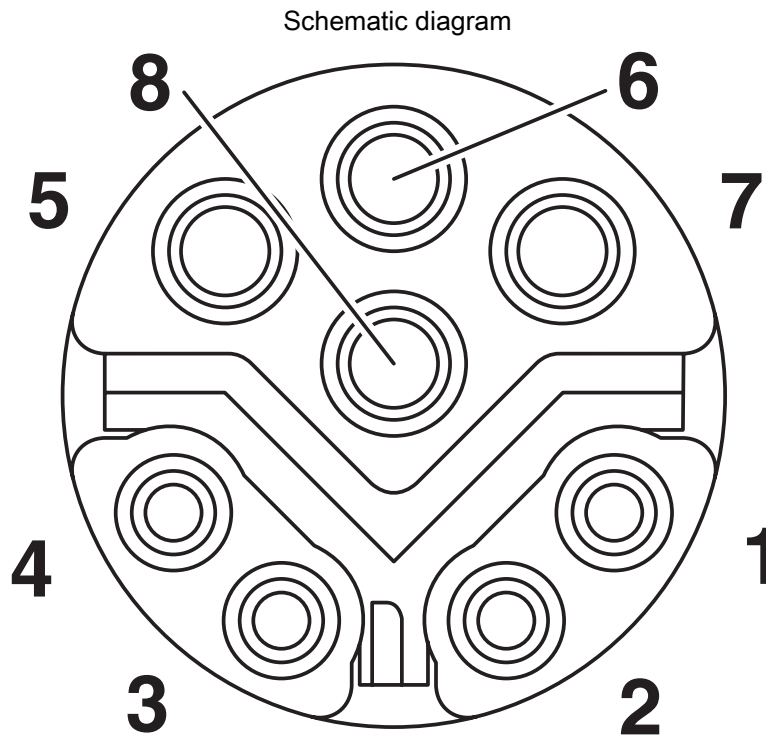

Pin assignment M12 socket, 8-pos.

# SACC-CI-M12FSY-8CON-L90 - Contact carrier



1424193

<https://www.phoenixcontact.com/us/products/1424193>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27460201

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	7d6bf912-47a8-45e9-b3cf-8988d961d427

# SACC-CI-M12FSY-8CON-L90 - Contact carrier



1424193

<https://www.phoenixcontact.com/us/products/1424193>

## Accessories

### PROT-M12 - Screw plug

1680539

<https://www.phoenixcontact.com/us/products/1680539>



An M12 screw plug for the unoccupied M12 sockets of the sensor/actuator cable, boxes and flush-type connectors

---

### PROT-M12 SH - Screw plug

1503302

<https://www.phoenixcontact.com/us/products/1503302>



An M12 screw plug for the unoccupied M12 sockets of the shielded sensor/actuator cable, boxes and flush-type connectors

## SACC-CI-M12FSY-8CON-L90 - Contact carrier

1424193

<https://www.phoenixcontact.com/us/products/1424193>



## PROT-M12 FB - Screw plug

1555538

<https://www.phoenixcontact.com/us/products/1555538>



M12 high-grade steel screw plug, for unoccupied M12 sockets of the sensor/actuator cables, boxes and flush-type connectors for the food industry

---

## SACC-M12-SCO NUT - Housing screw connection

1552243

<https://www.phoenixcontact.com/us/products/1552243>



Housing screw connection, Socket, M12-SPEEDCON, Front mounting, M12 x 1, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1237399



## SACC-CI-M12FSY-8CON-L90 - Contact carrier

1424193

<https://www.phoenixcontact.com/us/products/1424193>



## SACC-DSIV-M12-NUT - Housing screw connection

1416144

<https://www.phoenixcontact.com/us/products/1416144>



Housing screw connection, Pin, M12, Front mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239107

---

## SACC-M12-SCO NUT L 90 - Housing screw connection

1432460

<https://www.phoenixcontact.com/us/products/1432460>



Housing screw connection, M12-SPEEDCON, Front mounting, M12 x 1, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1237409

# SACC-CI-M12FSY-8CON-L90 - Contact carrier



1424193

<https://www.phoenixcontact.com/us/products/1424193>

## SACC-BP-F-M12/M15-6-THR - Housing screw connection

1414004

<https://www.phoenixcontact.com/us/products/1414004>



Housing screw connection, Socket, M12, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239056

---

## SACC-BP-F-M12/M15-7-THR - Housing screw connection

1414003

<https://www.phoenixcontact.com/us/products/1414003>



Housing screw connection, Socket, M12, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239055

# SACC-CI-M12FSY-8CON-L90 - Contact carrier



1424193

<https://www.phoenixcontact.com/us/products/1424193>

## SACC-BP-F-M12/M15-6-THR SCO - Housing screw connection

1414020

<https://www.phoenixcontact.com/us/products/1414020>



Housing screw connection, Socket, M12-SPEEDCON, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239057

---

## SACC-BP-F-M12/M15-7-THR SCO - Housing screw connection

1414005

<https://www.phoenixcontact.com/us/products/1414005>



Housing screw connection, Socket, M12-SPEEDCON, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1237398

## SACC-CI-M12FSY-8CON-L90 - Contact carrier

1424193

<https://www.phoenixcontact.com/us/products/1424193>



## SACC-M12 NUT PRESS - Housing screw connection

1437889

<https://www.phoenixcontact.com/us/products/1437889>



Housing screw connection, Socket, M12, Front mounting, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1237410

---

## SACC-BP-F-M12-THR PP - Housing screw connection

1027662

<https://www.phoenixcontact.com/us/products/1027662>



Housing screw connection, Socket, M12-Push-Pull, Rear mounting, M16, THR- und Wellenlötkontakte, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

# SACC-CI-M12FSY-8CON-L90 - Contact carrier

1424193

<https://www.phoenixcontact.com/us/products/1424193>



## SACC-FP-F-M12-THR PP - Housing screw connection

1027678

<https://www.phoenixcontact.com/us/products/1027678>



Housing screw connection, Socket, M12-Push-Pull, Front mounting, M14 x 1, THR- und Wellenlötkontakte, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)