

# SACC-CI-M12MS-17CON-L90 SH - Contact carrier



1424200

<https://www.phoenixcontact.com/us/products/1424200>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, 17-position, Pin, angled, M12, coding: A, PCB mounting, Wave soldering, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239457

## Your advantages

- Reduced mounting costs thanks to two-piece device connector
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate

## Commercial data

Item number	1424200
Packing unit	20 pc
Minimum order quantity	20 pc
Sales key	AB23
Product key	ABQAHA
Catalog page	Page 253 (C-2-2013)
GTIN	4046356692946
Weight per piece (including packing)	6.89 g
Weight per piece (excluding packing)	6.52 g
Customs tariff number	85366990
Country of origin	DE

## Technical data

### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

### Product properties

Product type	Contact insert
Application	Signal
Number of positions	17
Shielded	yes
Coding	A
Thread type	M12

#### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

#### Data management status

Article revision	05
------------------	----

### Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	30 V
Nominal current $I_N$	1.5 A

### Connection data

Connection method	Wave soldering
-------------------	----------------

### Material specifications

Flammability rating according to UL 94	V0
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6T

### Connector

#### Connection 1

Head design	Pin
Head cable outlet	angled
Head thread type	M12

# SACC-CI-M12MS-17CON-L90 SH - Contact carrier



1424200

<https://www.phoenixcontact.com/us/products/1424200>

Coding	A
--------	---

## Mechanical properties

Mechanical data	
Insertion/withdrawal cycles	> 100

## Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP67
	IP67, when in locked state
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)

## Standards and regulations

M12	
Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

## Mounting


Mounting type	PCB mounting
---------------	--------------

## Packaging specifications

Type of packaging	Blister
-------------------	---------

## Drawings

Schematic diagram

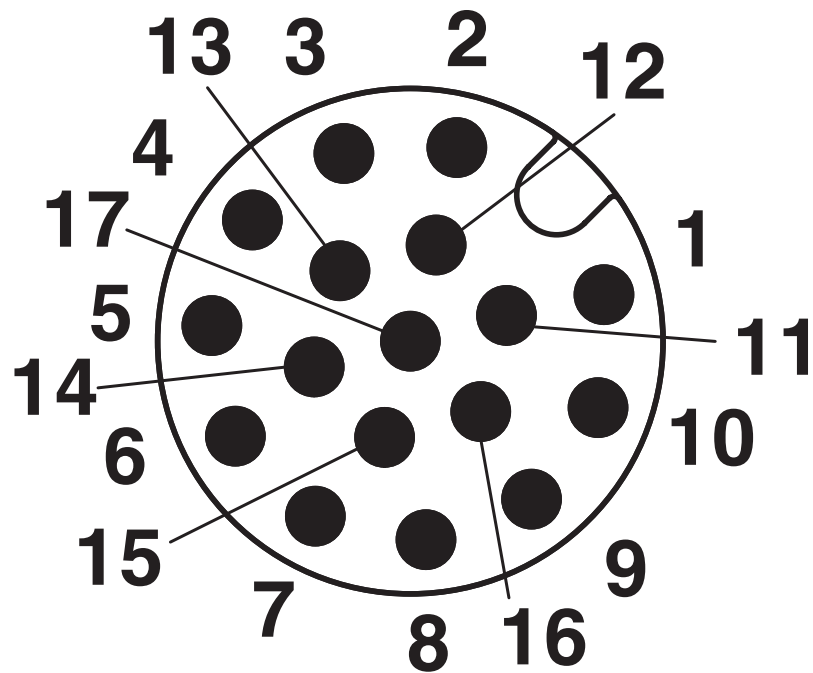

Pin assignment M12 male connector, 17-pos., male side view

# SACC-CI-M12MS-17CON-L90 SH - Contact carrier




1424200

<https://www.phoenixcontact.com/us/products/1424200>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424200>

<div> <b>UL Recognized</b> Approval ID: E118976-20100522</div>				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	30 V	1.5 A	26 - 26	-

# SACC-CI-M12MS-17CON-L90 SH - Contact carrier



1424200

<https://www.phoenixcontact.com/us/products/1424200>

## Classifications

### ECLASS

ECLASS-13.0	27440223
-------------	----------

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------



Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	e63b35ee-35db-4182-927b-1eb94f9ad175