

SAC-3P- 3,0-PUR/CI-1L-Z - Sensor/actuator cable



1435690

<https://www.phoenixcontact.com/us/products/1435690>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Valve connector CI (9.4 mm), with 1 LED, connected with Z diode, cable length: 3 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Convenient: increased machine availability thanks to quick and easy diagnostics
- Our standard: robust halogen-free PUR cable

Commercial data

Item number	1435690
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF07
Product key	BF1DFA
Catalog page	Page 228 (C-2-2019)
GTIN	4046356413930
Weight per piece (including packing)	109.5 g
Weight per piece (excluding packing)	99.9 g
Customs tariff number	85444290
Country of origin	PL

SAC-3P- 3,0-PUR/CI-1L-Z - Sensor/actuator cable



1435690

<https://www.phoenixcontact.com/us/products/1435690>

Technical data

Product properties

Product type	Sensor/actuator cable with valve connector
Number of positions	3
Application	Standard
No. of cable outlets	1
Shielded	no

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Seal material	TPU
Material housing valve plug	TPU
Contact material	CuSn
Valve plug contact insert material	PA 6.6
Contact surface material	Sn

Electrical properties

Contact resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	24 V AC
	24 V DC
Nominal current I_N	4 A
Protective circuit	Z diode

Valve connector characteristics

Fixing screws	M3 x 29
Pulse power	40 W (at 100 μs square-wave pulse)
Terminal voltage	70 V (at 2 mA constant current)
Reverse voltage	50 V

Signaling

Status display	1 LED
Status display present	Yes

Connector

Connection 1

Type	free cable end
------	----------------

Connection 2

Type	Valve connector CI (9.4 mm)
------	-----------------------------

SAC-3P- 3,0-PUR/CI-1L-Z - Sensor/actuator cable



1435690


<https://www.phoenixcontact.com/us/products/1435690>

Number of positions	3
Material	CuSn (Contact)
	Sn (Contact surface)
	PA 6.6 (Contact carriers)
	TPU (Housing)

Cable/line

Cable length	3 m
--------------	-----

PUR halogen-free black [PUR]

Dimensional drawing	
Cable weight	30 kg/km
UL AWM Style	20549
Number of positions	3
Shielded	no
Cable type	PUR halogen-free black [PUR]
Conductor structure signal line	28x 0.15 mm
AWG signal line	20
Conductor cross section	3x 0.5 mm²
Wire diameter incl. insulation	1.5 mm ±0.05 mm (Signal line)
External cable diameter	4.50 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	black 1, black 2, green/yellow
Overall twist	3 wires, twisted
Max. conductor resistance	39 Ω/km (at 20 °C)
Insulation resistance	min. 20 MΩ*km
Nominal voltage, cable	≤ 300 V
Test voltage	≥ 1200 V
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Smallest bending radius, fixed installation	22.5 mm
Smallest bending radius, movable installation	45 mm
Max. bending cycles	15000000
Halogen-free	in accordance with DIN VDE 0472 part 815

SAC-3P- 3,0-PUR/CI-1L-Z - Sensor/actuator cable



1435690

<https://www.phoenixcontact.com/us/products/1435690>

Flame resistance	according to DIN VDE 0482
	According to DIN EN 50265-2-1
Resistance to oil	in accordance with DIN EN 60811-2-1
Other resistance	largely oil-resistant
	partly UV-resistant (in accordance with DIN EN ISO 4892-2-A)
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
	-20 °C ... 80 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-20 °C ... 85 °C (valve plug)

Standards and regulations

Valve connector

Standard designation	Valve connector
Standards/specifications	EN 175301-803

SAC-3P- 3,0-PUR/CI-1L-Z - Sensor/actuator cable


1435690

<https://www.phoenixcontact.com/us/products/1435690>




Drawings

Dimensional drawing

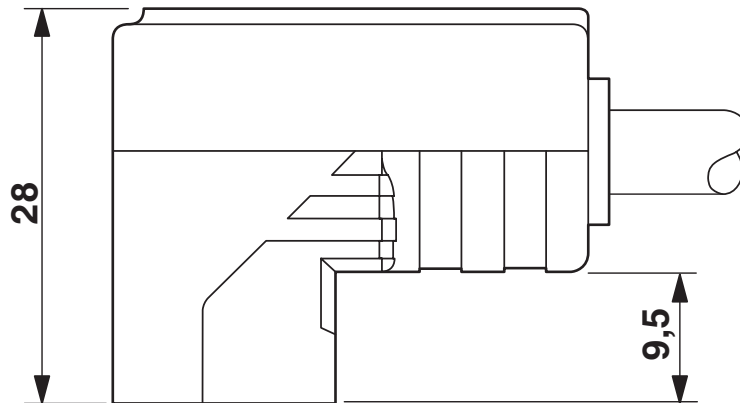


Valve connector, type CI, side view

Schematic diagram

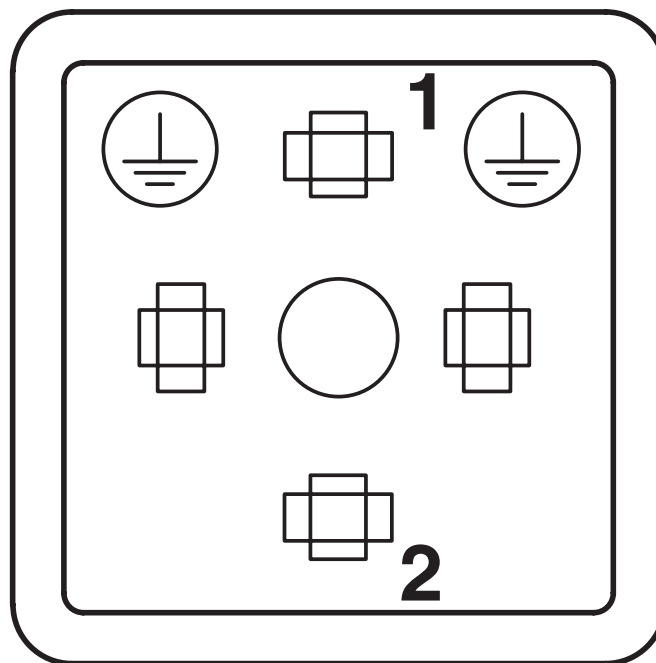


Valve connector connector pin assignment, type CI

Schematic diagram

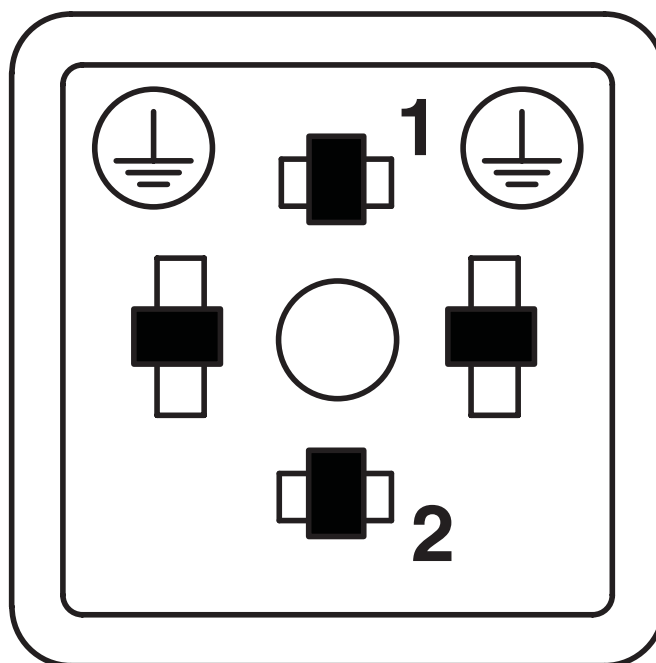

Valve connector connector pin assignment, type CI

Dimensional drawing

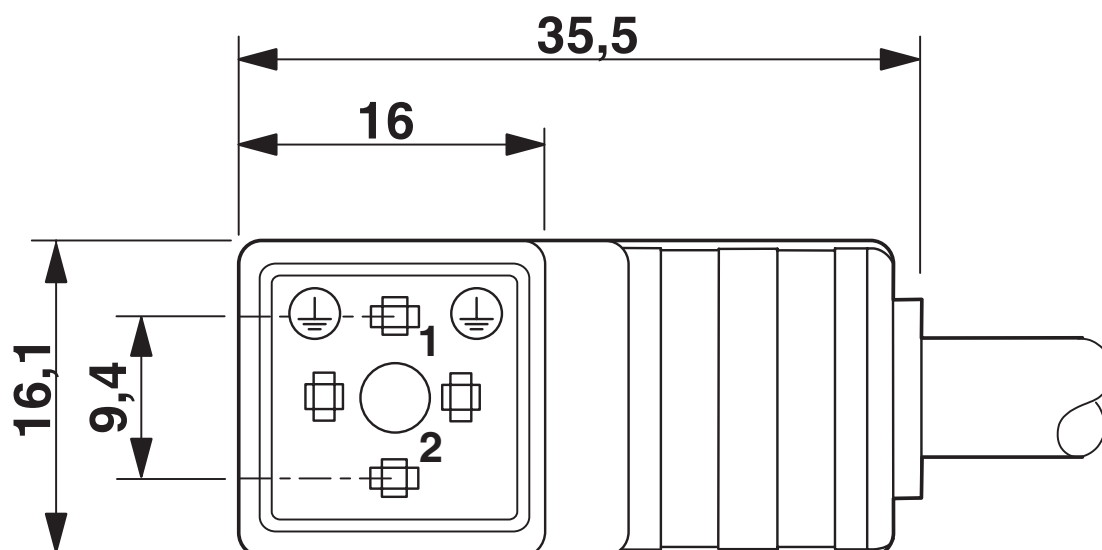


Valve connector, type CI

SAC-3P- 3,0-PUR/CI-1L-Z - Sensor/actuator cable

1435690

<https://www.phoenixcontact.com/us/products/1435690>

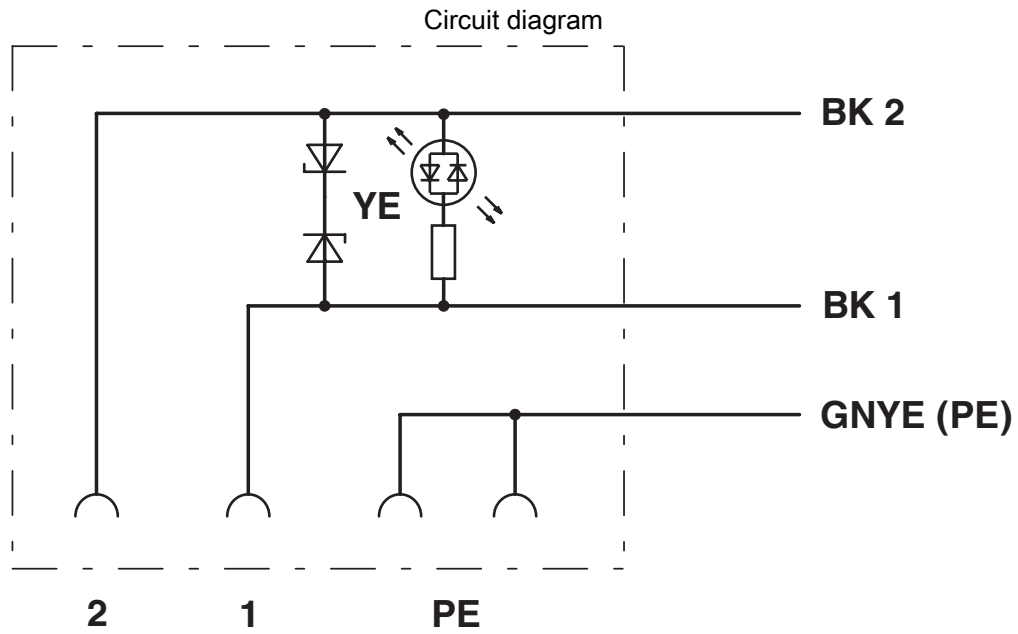

SAC-3P- 3,0-PUR/CI-1L-Z - Sensor/actuator cable




1435690


<https://www.phoenixcontact.com/us/products/1435690>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1435690>



EAC-RoHS
Approval ID: RU D-DE.HB35.B.00387

	CSAus Approval ID: 13631			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	6 A	-	-

SAC-3P- 3,0-PUR/CI-1L-Z - Sensor/actuator cable



1435690

<https://www.phoenixcontact.com/us/products/1435690>

Classifications

ECLASS

ECLASS-11.0	27060312
ECLASS-12.0	27060312
ECLASS-13.0	27060312

ETIM

ETIM 9.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

SAC-3P- 3,0-PUR/CI-1L-Z - Sensor/actuator cable



1435690
<https://www.phoenixcontact.com/us/products/1435690>

Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com