

# SACC-CI-M12MS-4CON-L90 SCO - Contact carrier



1436660

<https://www.phoenixcontact.com/us/products/1436660>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, 4-position, Pin, angled, M12-SPEEDCON, coding: A, PCB mounting, Wave soldering, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239628

## Your advantages

- Reduced mounting costs thanks to two-piece device connector
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate
- Additional gasket for the device when not plugged in

## Commercial data

Item number	1436660
Packing unit	20 pc
Minimum order quantity	20 pc
Sales key	AB23
Product key	ABQAHM
Catalog page	Page 252 (C-2-2013)
GTIN	4046356438735
Weight per piece (including packing)	4.99 g
Weight per piece (excluding packing)	4.52 g
Customs tariff number	85366990
Country of origin	DE

## Technical data

### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

### Product properties

Product type	Contact insert
Application	Signal
Number of positions	4
Seal present	yes
Shielded	no
Coding	A
Thread type	M12

### Insulation characteristics

Overvoltage category	II
Degree of pollution	3

### Electrical properties

Rated surge voltage	2.5 kV
Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	250 V
Nominal current $I_N$	4 A

### Connection data

Connection method	Wave soldering
-------------------	----------------

### Signaling

Status display	No
Status display present	No

### Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM / EPDM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6

### Connector

# SACC-CI-M12MS-4CON-L90 SCO - Contact carrier



1436660

<https://www.phoenixcontact.com/us/products/1436660>

## Connection 1

Head design	Pin
Head cable outlet	angled
Head thread type	M12
Head locking type	SPEEDCON
Coding	A

## Cable/line

Ambient temperature (operation)	-40 °C ... 85 °C (cable, fixed installation)
	-25 °C ... 85 °C (Cable, flexible installation)

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)
	-25 °C ... 85 °C (Cable, flexible installation)
	-40 °C ... 85 °C (cable, fixed installation)

## Standards and regulations

### M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

## Mounting


Mounting type	PCB mounting
---------------	--------------

## Packaging specifications

Type of packaging	Blister
-------------------	---------

## Drawings

Schematic diagram

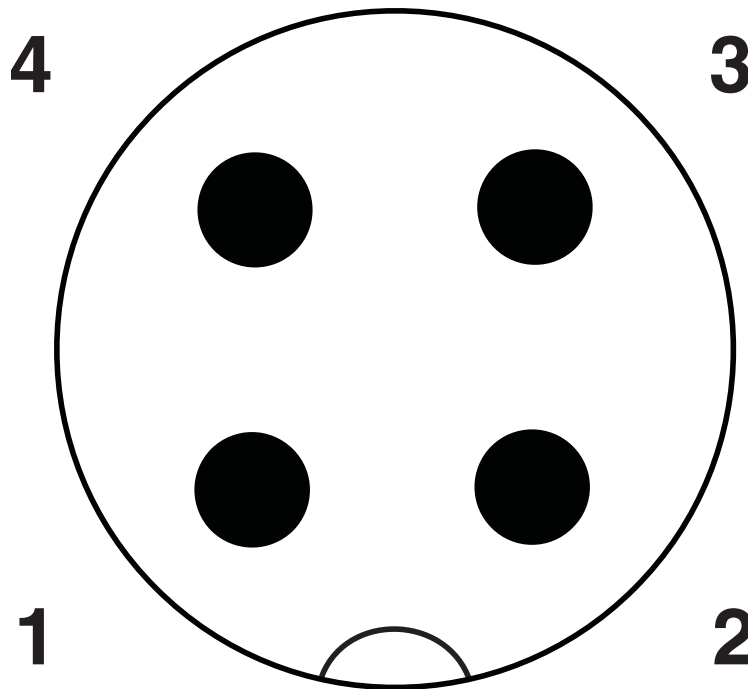

Pin assignment M12 plug, 4-pos., A-coded, view plug side

# SACC-CI-M12MS-4CON-L90 SCO - Contact carrier





1436660

<https://www.phoenixcontact.com/us/products/1436660>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1436660>

 <b>cUL Recognized</b> Approval ID: E118976-20100522				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	250 V	4 A	22 - 22	-

 <b>UL Recognized</b> Approval ID: E118976-20100522				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	250 V	4 A	22 - 22	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# SACC-CI-M12MS-4CON-L90 SCO - Contact carrier



1436660

<https://www.phoenixcontact.com/us/products/1436660>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27460201

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

# SACC-CI-M12MS-4CON-L90 SCO - Contact carrier



1436660

<https://www.phoenixcontact.com/us/products/1436660>

## Accessories

### PROT-M12 FS - Sealing cap

1560251

<https://www.phoenixcontact.com/us/products/1560251>



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

---

### PROT-M12 FS-M - Sealing cap

1430488

<https://www.phoenixcontact.com/us/products/1430488>



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field



## SACC-CI-M12MS-4CON-L90 SCO - Contact carrier

1436660

<https://www.phoenixcontact.com/us/products/1436660>



## SACC-DSIV-M12MS-SEAL - Sealing ring

1405751

<https://www.phoenixcontact.com/us/products/1405751>

Sealing ring, color: green



---

## SACC-M12-SCO PLUG - Housing screw connection

1551493

<https://www.phoenixcontact.com/us/products/1551493>



Housing screw connection, Pin, M12-SPEEDCON, Front mounting, M12 x 1,  
Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.  
1 %) item no.: 1237430

## SACC-CI-M12MS-4CON-L90 SCO - Contact carrier

1436660

<https://www.phoenixcontact.com/us/products/1436660>



## SACC-DSIV-M12-PLUG - Housing screw connection

1416145

<https://www.phoenixcontact.com/us/products/1416145>



Housing screw connection, Pin, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239108

---

## SACC-M12-SCO PLUG L90 - Housing screw connection

1436709

<https://www.phoenixcontact.com/us/products/1436709>



Housing screw connection, M12-SPEEDCON, Front mounting, M12 x 1, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239632

# SACC-CI-M12MS-4CON-L90 SCO - Contact carrier



1436660

<https://www.phoenixcontact.com/us/products/1436660>

## SACC-BP-M-M12/M15-6-THR - Housing screw connection

1413997

<https://www.phoenixcontact.com/us/products/1413997>



Housing screw connection, Pin, M12, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239050

---

## SACC-BP-M-M12/M15-7-THR - Housing screw connection

1413996

<https://www.phoenixcontact.com/us/products/1413996>



Housing screw connection, Pin, M12, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239049

# SACC-CI-M12MS-4CON-L90 SCO - Contact carrier



1436660

<https://www.phoenixcontact.com/us/products/1436660>

## SACC-BP-M-M12/M15-6-THR SCO - Housing screw connection

1413999

<https://www.phoenixcontact.com/us/products/1413999>



Housing screw connection, Pin, M12-SPEEDCON, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239052

---

## SACC-BP-M-M12/M15-7-THR SCO - Housing screw connection

1413998

<https://www.phoenixcontact.com/us/products/1413998>



Housing screw connection, Pin, M12-SPEEDCON, Rear mounting, M15 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239051

## SACC-CI-M12MS-4CON-L90 SCO - Contact carrier

1436660

<https://www.phoenixcontact.com/us/products/1436660>



## SACC-M12 PLUG PRESS - Housing screw connection

1437892

<https://www.phoenixcontact.com/us/products/1437892>



Housing screw connection, Pin, M12, Front mounting, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239688

---

## SACC-DSIV-M12-PLUG-9 THR - Housing screw connection

1417984

<https://www.phoenixcontact.com/us/products/1417984>



Housing screw connection, Pin, M12, Rear mounting, M14 x 1, THR solder connection, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239180

# SACC-CI-M12MS-4CON-L90 SCO - Contact carrier



1436660

<https://www.phoenixcontact.com/us/products/1436660>

## SACC-BP-M-M12-THR PP - Housing screw connection

1027661

<https://www.phoenixcontact.com/us/products/1027661>



Housing screw connection, Pin, M12-Push-Pull, Rear mounting, M15 x 1, THR- und Wellenlötkontakte, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

---

## SACC-FP-M-M12-THR PP - Housing screw connection

1027679

<https://www.phoenixcontact.com/us/products/1027679>



Housing screw connection, Pin, M12-Push-Pull, Front mounting, THR- und Wellenlötkontakte, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)