

SACC-DSIV-M12FSB-5CON-L180 SH - Device connector rear mounting



1437180
<https://www.phoenixcontact.com/us/products/1437180>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator flush-type connector, socket, 5-pos., M12, shielded, B-coded, rear/screw mounting with M12 thread, with polarity protection, with straight solder connection

Your advantages

- Standard pin assignments and codings for signal transmission with a uniform design-in design

Commercial data

Item number	1437180
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	AB23
Product key	ABQEHA
Catalog page	Page 189 (C-2-2013)
GTIN	4046356460385
Weight per piece (including packing)	15.02 g
Weight per piece (excluding packing)	15.02 g
Customs tariff number	85366990
Country of origin	HU

SACC-DSIV-M12FSB-5CON-L180 SH - Device

connector rear mounting



1437180

<https://www.phoenixcontact.com/us/products/1437180>

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

Mounting

Mounting type	Rear mounting M12 x 1 With locking nut
Assembly instructions	With locking nut

Product properties

Product type	Circular connectors (device side)
Number of positions	5
Shielded	yes
Coding	B
Thread type	M12

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	HB
Seal material	NBR
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 6.6
Material for screw connection	Brass, nickel-plated

Electrical properties

Rated surge voltage	1.5 kV
Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	60 V
Nominal current I_N	4 A

Connection data

Conductor connection

Connection method	Solder pins
Contact connection type	Socket

SACC-DSIV-M12FSB-5CON-L180 SH - Device connector rear mounting



1437180

<https://www.phoenixcontact.com/us/products/1437180>

Tightening torque	1 Nm ... 1.5 Nm (Installation-side)
-------------------	-------------------------------------

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Coding	B

Cable/line

Ambient temperature (operation)	-40 °C ... 85 °C (cable, fixed installation)
	-25 °C ... 85 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)
	-25 °C ... 85 °C (Cable, flexible installation)
	-40 °C ... 85 °C (cable, fixed installation)

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

SACC-DSIV-M12FSB-5CON-L180 SH - Device connector rear mounting




1437180

<https://www.phoenixcontact.com/us/products/1437180>

Drawings

Schematic diagram

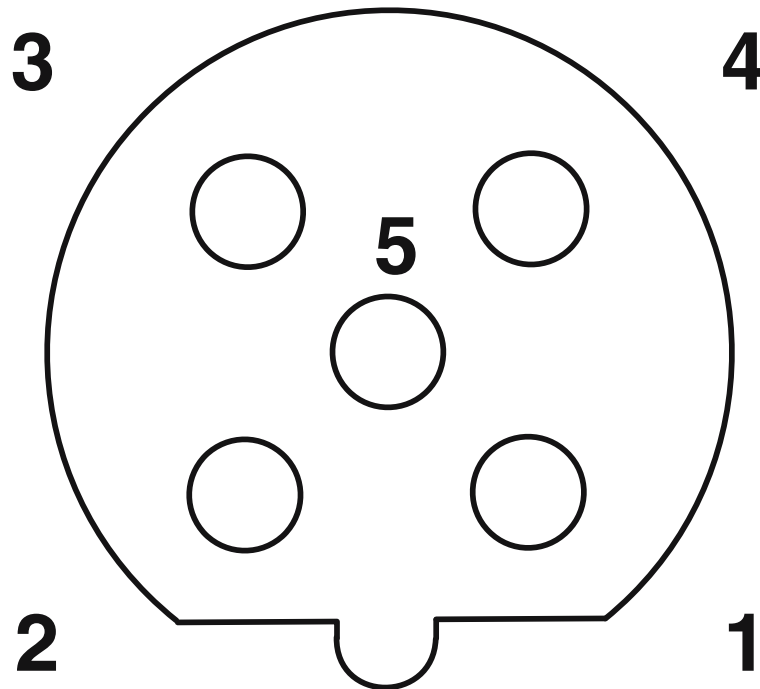

Pin assignment M12 socket, 5-pos., B-coded, female side

SACC-DSIV-M12FSB-5CON-L180 SH - Device connector rear mounting



1437180
<https://www.phoenixcontact.com/us/products/1437180>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1437180>

	cUL Recognized Approval ID: FILE E 221474			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	60 V	4 A	-	-

	UL Recognized Approval ID: FILE E 221474			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	60 V	4 A	-	-

	UL Recognized Approval ID: E221474-20070307			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	60 V	4 A	-	-

	cUL Recognized Approval ID: E221474-20070307			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	60 V	4 A	-	-

SACC-DSIV-M12FSB-5CON-L180 SH - Device connector rear mounting



1437180
<https://www.phoenixcontact.com/us/products/1437180>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACC-DSIV-M12FSB-5CON-L180 SH - Device connector rear mounting



1437180
<https://www.phoenixcontact.com/us/products/1437180>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	402a191d-28df-46fb-971a-ca718ed7537f

SACC-DSIV-M12FSB-5CON-L180 SH - Device connector rear mounting



1437180

<https://www.phoenixcontact.com/us/products/1437180>

Accessories

PROT-M12 - Screw plug

1680539

<https://www.phoenixcontact.com/us/products/1680539>



An M12 screw plug for the unoccupied M12 sockets of the sensor/actuator cable, boxes and flush-type connectors

PROT-M12 SH - Screw plug

1503302

<https://www.phoenixcontact.com/us/products/1503302>



An M12 screw plug for the unoccupied M12 sockets of the shielded sensor/actuator cable, boxes and flush-type connectors

SACC-DSIV-M12FSB-5CON-L180 SH - Device connector rear mounting



1437180

<https://www.phoenixcontact.com/us/products/1437180>

PROT-M12 FB - Screw plug

1555538

<https://www.phoenixcontact.com/us/products/1555538>



M12 high-grade steel screw plug, for unoccupied M12 sockets of the sensor/actuator cables, boxes and flush-type connectors for the food industry

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com