

SACB-8/ 8-C SCO P - Distributor box



1452783

<https://www.phoenixcontact.com/it/products/1452783>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distributor box, application: Standard, connection method: M12-SPEEDCON-socket Plastic, number of slots: 8, number of positions: 4, coding: A, slot assignment: single, status display: No, Universal; master cable connection: Pluggable screw connection 180°, shielding: no

Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Save time, thanks to installation with SPEEDCON fast locking system
- Flexible: distributor box with connector hood for on-site assembly

Commercial data

Item number	1452783
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF3
Product key	BF3CBD
Catalog page	Page 263 (C-2-2019)
GTIN	4046356553520
Weight per piece (including packing)	229 g
Weight per piece (excluding packing)	229 g
Customs tariff number	85366990
Country of origin	DE

SACB-8/ 8-C SCO P - Distributor box



1452783

<https://www.phoenixcontact.com/it/products/1452783>

Technical data

Notes

General	For details about the PCB connectors used, refer to the technical data for MC 1,5/10-STF-3,5 (1847204)
General	NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
General	Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".


Product properties

Product type	Distributor boxes with M8 to M12 slots
Number of positions	4
Application	Standard
Number of slots	8
Coding	A
LED	No

Material specifications

Material Threaded sleeve	PBT
Material Housing	PBT
Material Molding compound	PUR
Flammability rating according to UL 94	V0
Seal material O-ring	NBR
Contact material	Cu alloy
Contact surface material	gold-plated
Contact carrier material	PA
Material of contact, master cable side	CU alloy
Material of the contact carrier on the master cable side	PA
Material of contact surface, master cable side	Sn

Dimensions

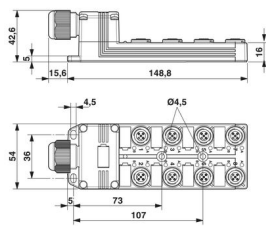Dimensional drawing	
Width	54 mm
Height	43 mm
Length	149 mm

SACB-8/ 8-C SCO P - Distributor box



1452783

<https://www.phoenixcontact.com/it/products/1452783>

Signaling

Status display present	No
------------------------	----

Electrical properties

Nominal voltage U_N	120 V AC
	120 V DC
Rated current, total	10 A
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	4 A

Cable/line

Sensor/actuator connection system	M12-SPEEDCON-socket
Connection method	Pluggable screw connection
External cable diameter	7 mm ... 12 mm
Stripping length (signal)	7 mm
Stripping length (power)	7 mm
Stripping length for sheath	50 mm (Master cable)
Tightening torque, cover screw	1 Nm
Tightening torque of mounting screw for fixing the housing	0.5 Nm
Tightening torque slot sensor/actuator cable	0.4 Nm
Tightening torque, union nut	2.5 Nm

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 80 °C


SACB-8/ 8-C SCO P - Distributor box

1452783

<https://www.phoenixcontact.com/it/products/1452783>

Drawings

Dimensional drawing

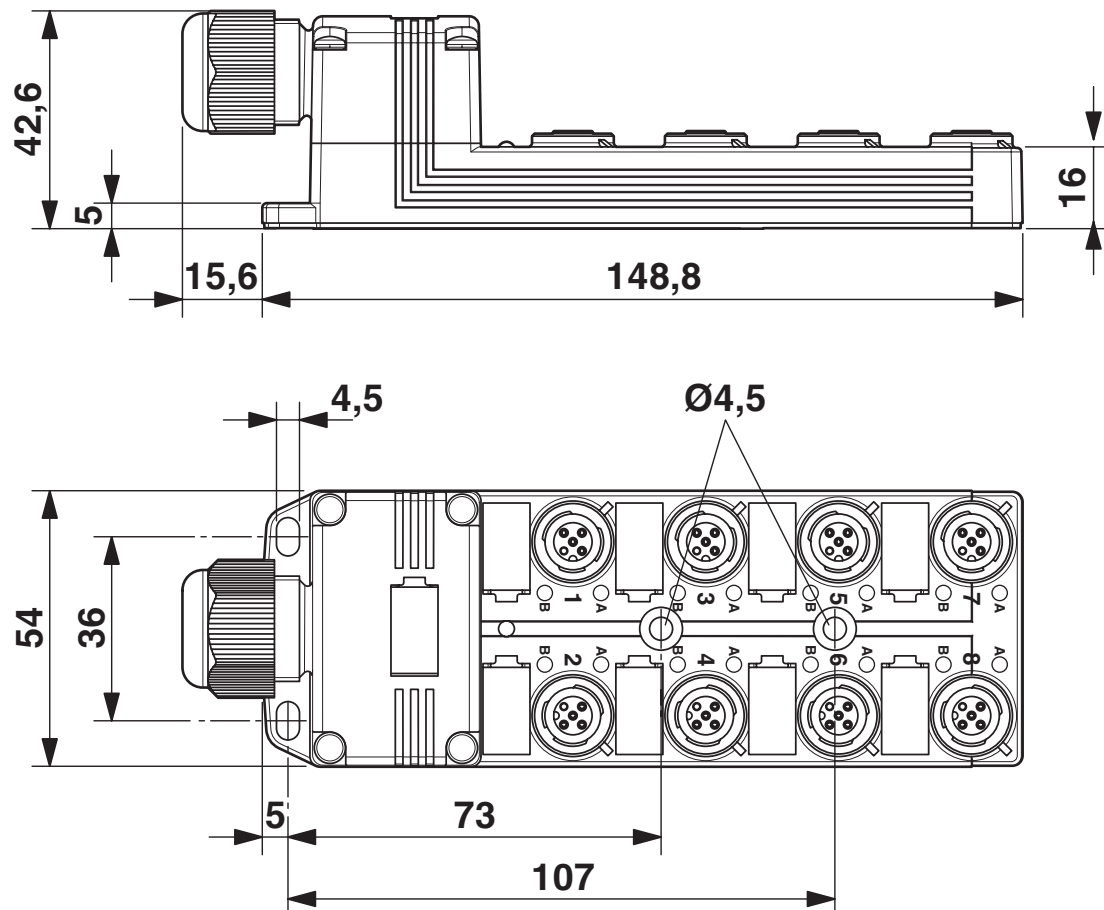


SACB-8/ 8-C SCO P - Distributor box


1452783

<https://www.phoenixcontact.com/it/products/1452783>

Circuit diagram

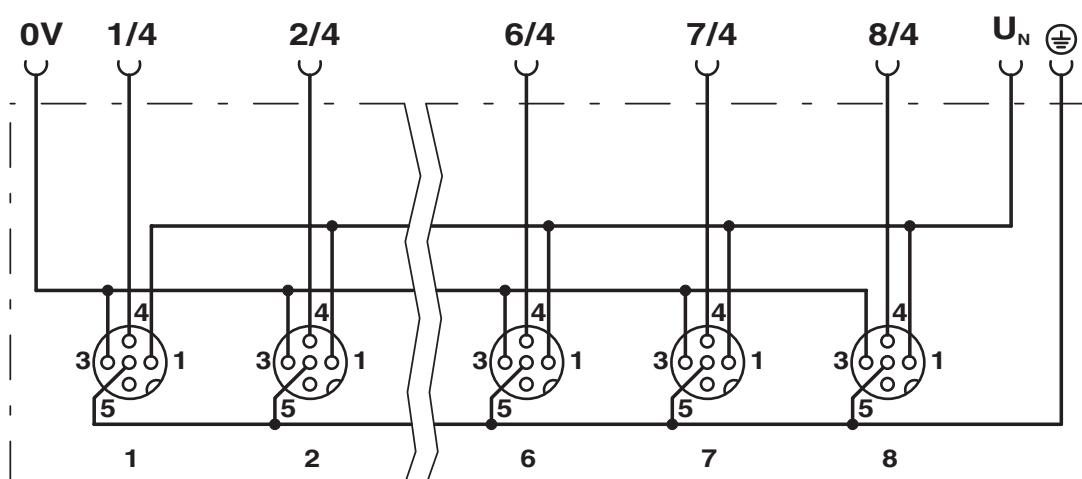

Schematic diagram

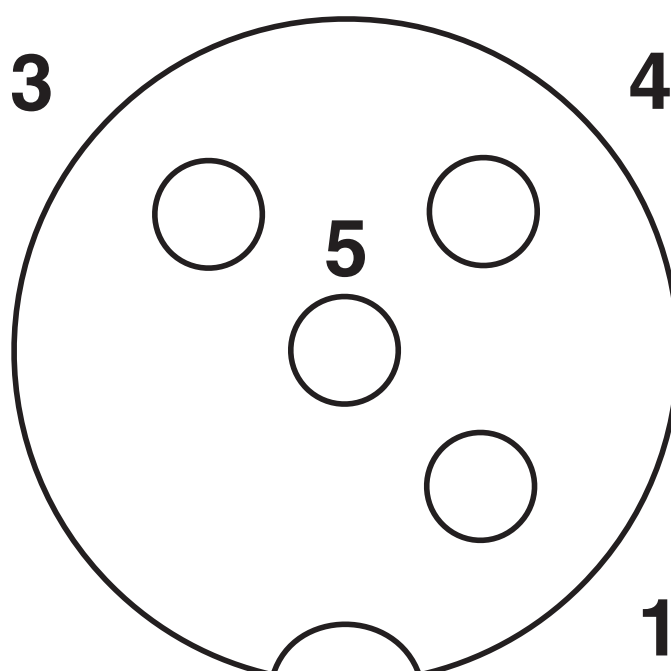

M12 slot, socket, 4-pos.

SACB-8/ 8-C SCO P - Distributor box





1452783


<https://www.phoenixcontact.com/it/products/1452783>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/it/products/1452783>

 cUL Recognized Approval ID: FILE E 118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	120 V	-	-	-

 UL Recognized Approval ID: FILE E 118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	120 V	-	-	-

 EAC Approval ID: RU C-DE.BL08.B.00511				
--	--	--	--	--

cULus Recognized				
-------------------------	--	--	--	--

SACB-8/ 8-C SCO P - Distributor box



1452783

<https://www.phoenixcontact.com/it/products/1452783>

Classifications

ECLASS

ECLASS-11.0	27440111
ECLASS-12.0	27440111
ECLASS-13.0	27440111

ETIM

ETIM 9.0	EC003558
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

SACB-8/ 8-C SCO P - Distributor box



1452783

<https://www.phoenixcontact.com/lt/products/1452783>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact UAB
Svitrigailos str. 11B
03228 Vilnius
+370 5 2106321
balticinfo@phoenixcontact.com