


1492WM4

Allen-Bradley 1492-W Screw Connection Mini Terminal 4mm 1
Level 2 Conductor Entries Grey

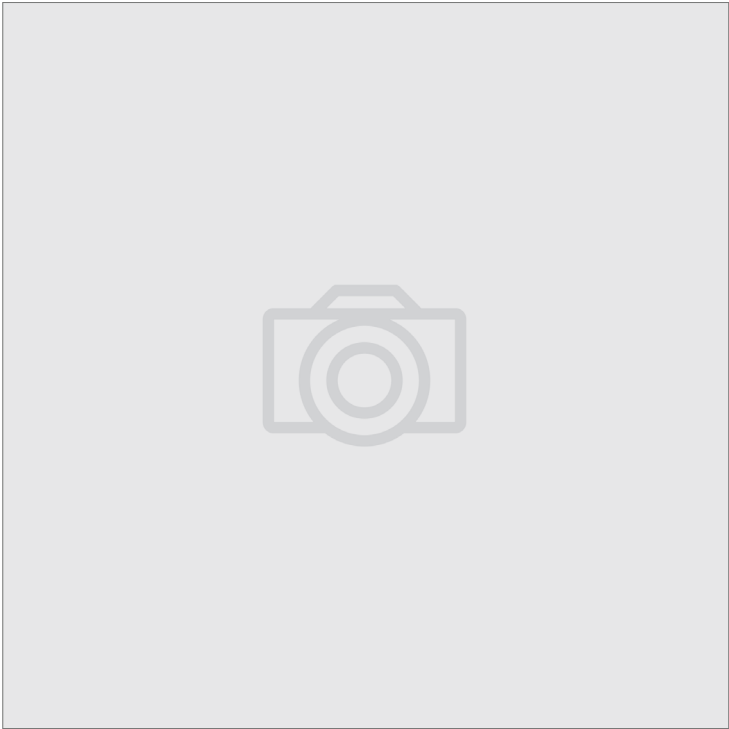

Component type	Feed-through terminal block
Range	1492J/W
Model	N/A
Product status	Existing

The Allen-Bradley 1492-J and W ranges of screw connection terminal blocks are reliable, safe and straight forward electrical connections for wiring management. With cross-sectional wire sizes from 0.5mm² to 120mm² and terminal types such as feed-through, disconnect, fused, plug-in and thermocouple. Options include single or multi-level housing and accessories for various panel space requirements.

ELECTRICAL	Type of electrical connection 1	Screw connection
	Rated current I _n	32 A
	Rated voltage	500 V
CONSTRUCTION	Number of levels	1
	Number of clamp positions per level	2
	Colour	Grey
	Mounting method	DIN rail (top hat rail) 35 mm
	Inflammability class of insulation material according to with UL94	V0
MECHANICAL	Nominal tightening torque	0.7 Nm
DIMENSIONS	Wire/conductor size	0.5-4 mm
	Width	6 mm
	Height	32 mm
	Depth	28 mm
	Wire strip length	10 mm
ENVIRONMENT	Insulation temperature	-40...90 °C
	Operating temperature	...40...90 °C