

SACB-8/16-L-C GG SCO - Header

1516771

<https://www.phoenixcontact.com/it/products/1516771>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Header, application: Standard, connection method: M12-SPEEDCON-socket Metal, number of slots: 8, number of positions: 5, coding: A, slot assignment: Double, status display: Yes, pnp; master cable connection: Pluggable screw connection, shielding: no

Commercial data

Item number	1516771
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF3
Product key	BF3CCD
Catalog page	Page 265 (C-2-2019)
GTIN	4017918967505
Weight per piece (including packing)	313.8 g
Weight per piece (excluding packing)	303 g
Customs tariff number	85366990
Country of origin	DE

SACB-8/16-L-C GG SCO - Header

1516771

<https://www.phoenixcontact.com/it/products/1516771>



Technical data

Notes

General	NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
General	Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".

Product properties

Product type	Header with metric measurement slots
Number of positions	5
Application	Standard
Number of slots	8
Coding	A
LED	yes

System properties

Local diagnostics	
Monitored function	Supply voltage per module
Optical representation	Green LED

Electrical properties

Max. operating voltage U_{max}	30 V DC
Local diagnostics	Supply voltage per module Green LED
	Status display I/O Yellow LED
Nominal voltage U_N	24 V DC
Rated current, total	10 A
	2x 8 A (For electrical isolation)
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	4 A

Signaling

Status display present	Yes
------------------------	-----

Dimensions

Dimensional drawing	
Width	58 mm

SACB-8/16-L-C GG SCO - Header



1516771

<https://www.phoenixcontact.com/it/products/1516771>

Height	26 mm
Length	153 mm

Material specifications

Material Threaded sleeve	Die-cast zinc
Material Housing	PBT
Material Molding compound	PUR
Flammability rating according to UL 94	V0
Seal material O-ring	NBR
Contact material	Cu alloy
Contact surface material	gold-plated
Contact carrier material	PA
Material of contact, master cable side	CU alloy
Material of the contact carrier on the master cable side	PA 6.6 V0
Material of contact surface, master cable side	gold-plated

Cable/line

Sensor/actuator connection system	M12-SPEEDCON-socket
Connection method	Pluggable screw connection
Tightening torque of mounting screw for fixing the housing	0.5 Nm
Tightening torque slot sensor/actuator cable	0.4 Nm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
	IP69K
Ambient temperature (operation)	-30 °C ... 80 °C

Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101


SACB-8/16-L-C GG SCO - Header

1516771


<https://www.phoenixcontact.com/it/products/1516771>

Drawings

Circuit diagram

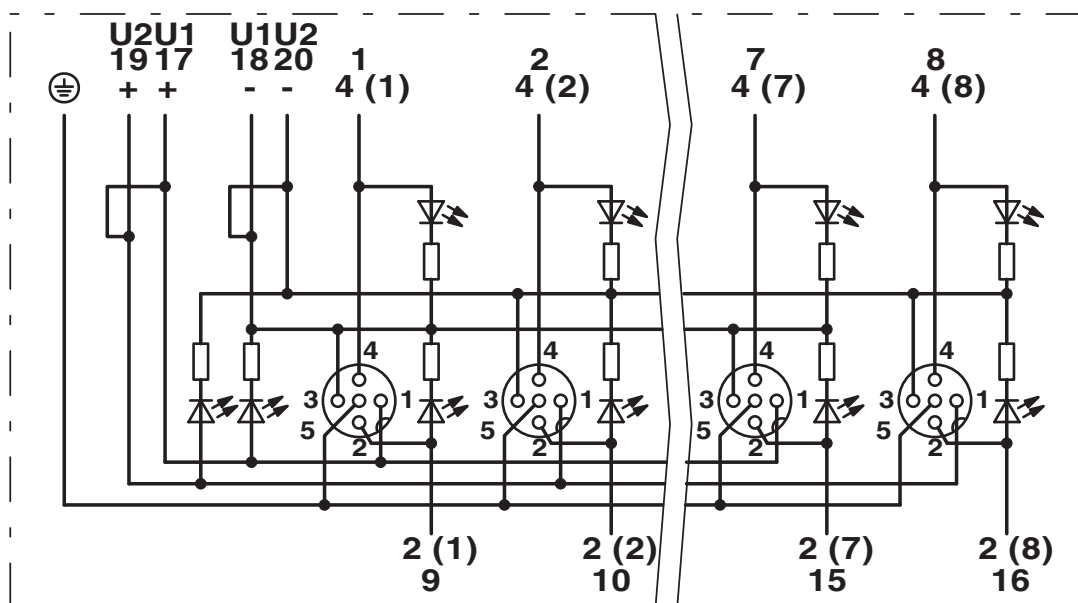

Schematic diagram

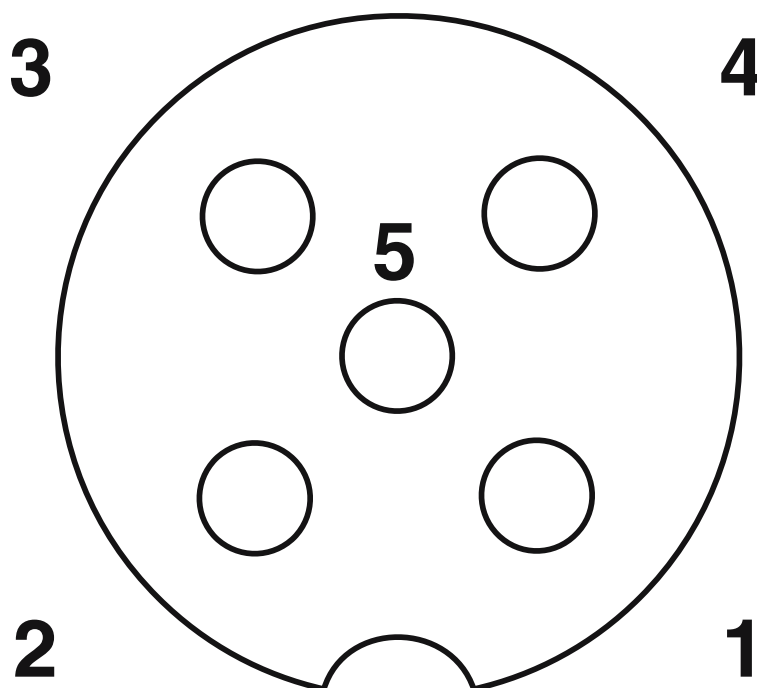

M12 slot, socket, 5-pos.


SACB-8/16-L-C GG SCO - Header

1516771

<https://www.phoenixcontact.com/it/products/1516771>



Schematic diagram

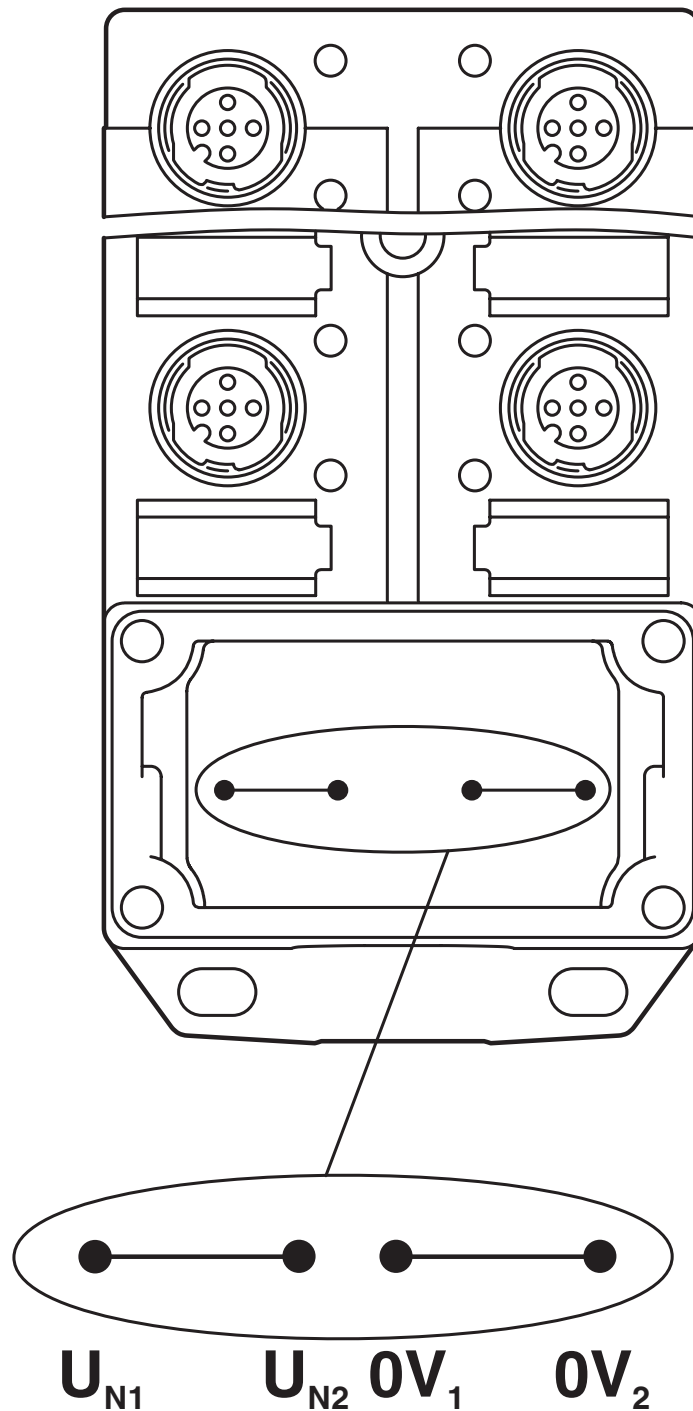

Potential U_{N1} and U_{N2} bridged. Potential assignment: $U_{N1} = U_{N2} = \text{slots } 1,2,3,4,5,6,7,8$.


SACB-8/16-L-C GG SCO - Header

1516771

<https://www.phoenixcontact.com/it/products/1516771>



Dimensional drawing

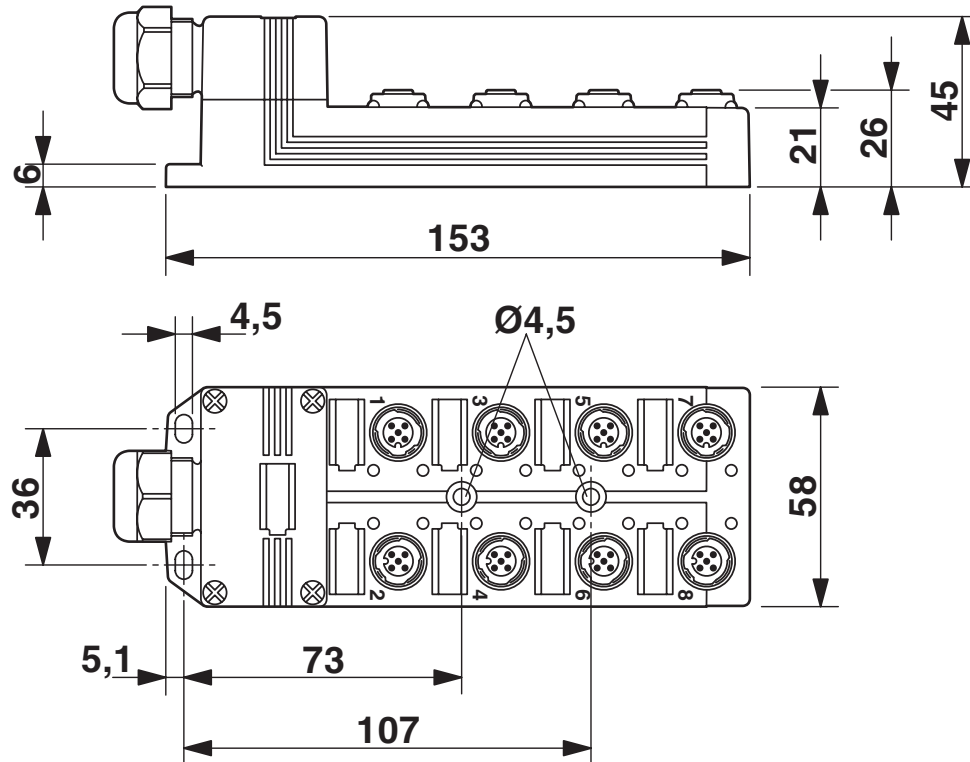


SACB-8/16-L-C GG SCO - Header

1516771

<https://www.phoenixcontact.com/it/products/1516771>



Schematic diagram

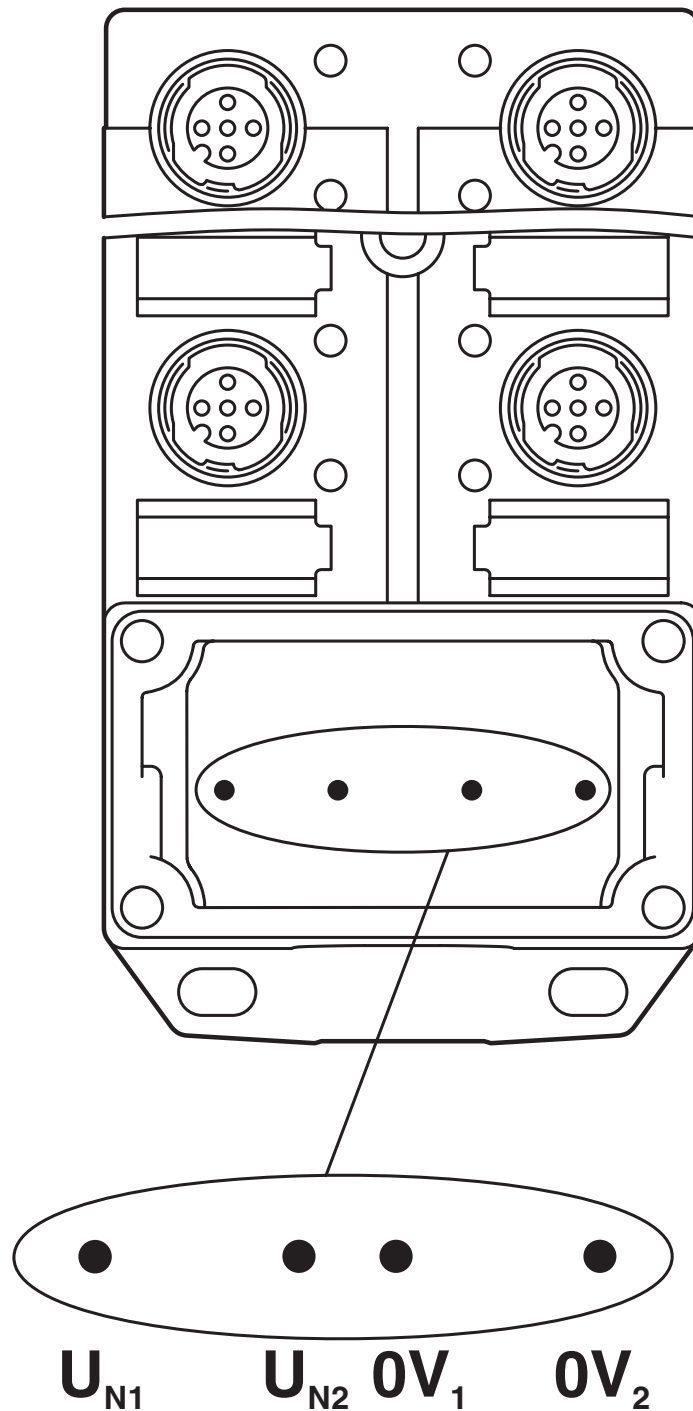

Electrically isolated. Potential assignment: U_{N1} = slots 1,3,5,7 and U_{N2} = slots 2,4,6,8.


SACB-8/16-L-C GG SCO - Header




1516771
<https://www.phoenixcontact.com/it/products/1516771>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/it/products/1516771>

 cUL Recognized Approval ID: FILE E 118976				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	24 V	3 A	-	-

 UL Recognized Approval ID: FILE E 118976				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	24 V	3 A	-	-

cULus Recognized				
-------------------------	--	--	--	--



Classifications

ECLASS

ECLASS-11.0	27440111
ECLASS-12.0	27440111
ECLASS-13.0	27440111

ETIM

ETIM 9.0	EC003558
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact UAB
Svitrigailos str. 11B
03228 Vilnius
+370 5 2106321
balticinfo@phoenixcontact.com