

# SACB-4/ 4- 5,0PUR SCO - Distributor box



1516962

<https://www.phoenixcontact.com/it/products/1516962>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distributor box, application: Standard, connection method: M12-SPEEDCON-socket Metal, number of slots: 4, number of positions: 4, coding: A, slot assignment: single, status display: No, Universal; master cable connection: Fixed connection 180°, PUR/PVC, cable length: 5 m, shielding: no

## Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Save time, thanks to installation with SPEEDCON fast locking system

## Commercial data

Item number	1516962
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF3
Product key	BF3CCA
Catalog page	Page 264 (C-2-2019)
GTIN	4017918967635
Weight per piece (including packing)	656.5 g
Weight per piece (excluding packing)	631.2 g
Customs tariff number	85366990
Country of origin	DE

# SACB-4/ 4- 5,0PUR SCO - Distributor box



1516962

<https://www.phoenixcontact.com/it/products/1516962>

## Technical data

### Notes

General	<b>NOTE:</b> Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
General	Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".


### Product properties

Product type	Distributor boxes with M8 to M12 slots
Number of positions	4
Application	Standard
Number of slots	4
Coding	A
LED	No

### Material specifications

Material Threaded sleeve	Die-cast zinc
Material Housing	PBT
Material Molding compound	PUR
Flammability rating according to UL 94	V0
Seal material O-ring	NBR
Contact material	Cu alloy
Contact surface material	gold-plated
Contact carrier material	PA

### Dimensions

Dimensional drawing	
Width	58 mm
Height	26 mm
Length	117 mm

### Signaling

Status display present	No
------------------------	----

### Electrical properties

Max. operating voltage $U_{max}$	135 V
----------------------------------	-------

# SACB-4/ 4- 5,0PUR SCO - Distributor box



1516962


<https://www.phoenixcontact.com/it/products/1516962>

Nominal voltage $U_N$	120 V AC
	120 V DC
Rated current, total	12 A
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	4 A

## Cable/line

Cable length	5 m
--------------	-----

### PUR/PVC black [PUR]

Dimensional drawing	
Cable weight	77.9 kg/km
UL AWM Style	20549
Number of positions	7
Shielded	no
Cable type	PUR/PVC black [PUR]
Conductor structure signal line	19x 0.15 mm
AWG signal line	22
Conductor cross section	4x 0.34 mm² (Signal line)
	3x 0.75 mm² (power line)
Wire diameter incl. insulation	1.3 mm ±0.1 mm (Signal line)
	1.8 mm ±0.1 mm (power line)
External cable diameter	6.90 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	brown, blue, green/yellow, white, green, yellow, gray
Inner sheath thickness	≥ 0.15 mm
Thickness, outer sheath	≥ 0.38 mm
Overall twist	Wires twisted in layers
Nominal voltage, cable	300 V
Test voltage	2000 V
Minimum bending radius, fixed installation	7.5 x D
Minimum bending radius, flexible installation	10 x D
Smallest bending radius, fixed installation	52 mm
Smallest bending radius, movable installation	69 mm

# SACB-4/ 4- 5,0PUR SCO - Distributor box



1516962

<https://www.phoenixcontact.com/it/products/1516962>

Max. bending cycles	1500000
Flame resistance	DIN EN 50265
Resistance to oil	according to VDE 0472 Part 803
Other resistance	Highly resistant to acids, alkaline solutions and solvents
Special properties	Silicone-free
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation)
	-5 °C ... 80 °C (Cable, flexible installation)
	80 °C (in acc. with UL)

## Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
	IP67
	IP69K
Ambient temperature (operation)	-30 °C ... 90 °C


# SACB-4/ 4- 5,0PUR SCO - Distributor box

1516962


<https://www.phoenixcontact.com/it/products/1516962>




## Drawings

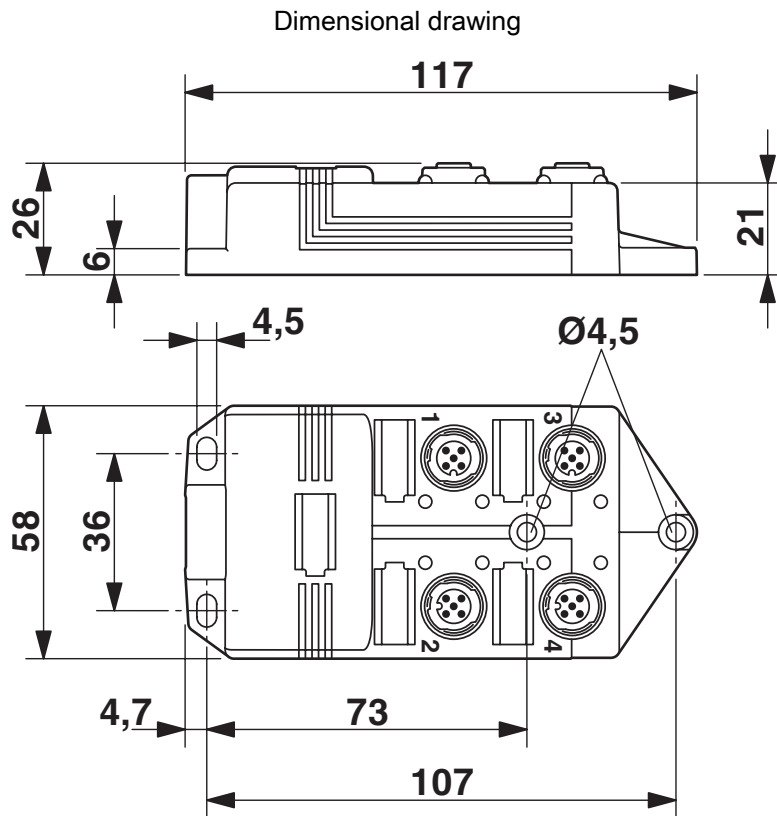

Circuit diagram

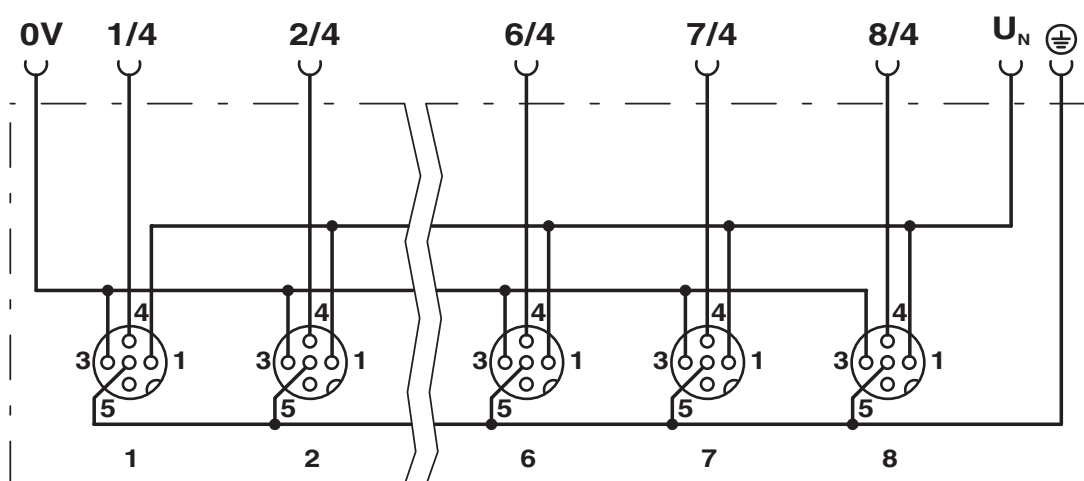

Schematic diagram

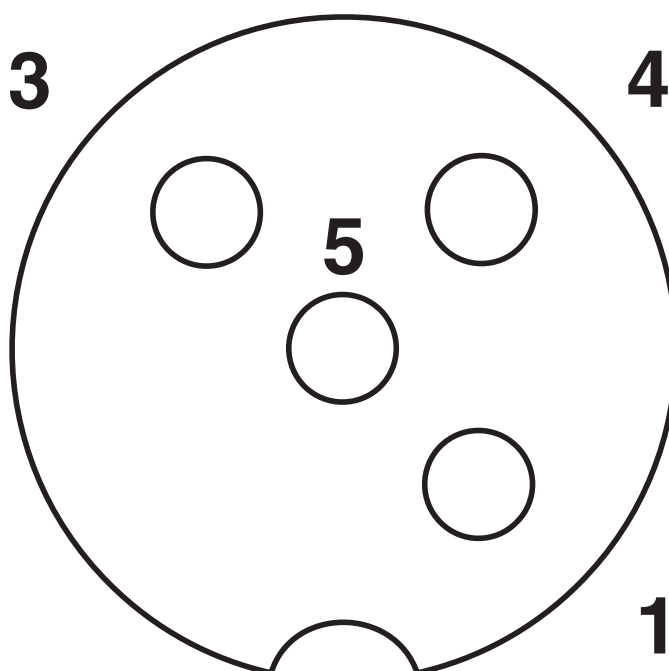

# SACB-4/ 4- 5,0PUR SCO - Distributor box





1516962


<https://www.phoenixcontact.com/it/products/1516962>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/it/products/1516962>

 <b>cUL Recognized</b> Approval ID: FILE E 118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	120 V	3 A	-	-

 <b>UL Recognized</b> Approval ID: FILE E 118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	120 V	3 A	-	-

 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00511				
--	--	--	--	--

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# SACB-4/ 4- 5,0PUR SCO - Distributor box



1516962

<https://www.phoenixcontact.com/it/products/1516962>

## Classifications

### ECLASS

ECLASS-11.0	27440108
ECLASS-12.0	27440108
ECLASS-13.0	27440108

### ETIM

ETIM 9.0	EC002585
----------	----------

### UNSPSC

UNSPSC 21.0	31251500
-------------	----------



# SACB-4/ 4- 5,0PUR SCO - Distributor box



1516962

<https://www.phoenixcontact.com/lt/products/1516962>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact UAB  
Svitrigailos str. 11B  
03228 Vilnius  
+370 5 2106321  
[balticinfo@phoenixcontact.com](mailto:balticinfo@phoenixcontact.com)