SACC-E-FS-4CON-M16/0,5 SCO - Device connector front mounting



1523434

https://www.phoenixcontact.com/pc/products/1523434

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, Universal, 4-position, Socket, straight, M12, coding: A, on free cable end, Front mounting, M16 x 1.5, Individual wires, cable length: 0.5 m, 0.34 mm², TPE litz wire

Your advantages

- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- · All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · For high transmission safety: shield connection to the housing with optional EMC nut
- · SPEEDCON fast locking system reduces cabling times

Commercial data

| Item number | 1523434 |
|--------------------------------------|--------------------|
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Product key | ABQCFB |
| Catalog page | Page 37 (C-2-2019) |
| GTIN | 4046356021265 |
| Weight per piece (including packing) | 30.5 g |
| Weight per piece (excluding packing) | 20.3 g |
| Customs tariff number | 85444290 |
| Country of origin | DE |



https://www.phoenixcontact.com/pc/products/1523434

Technical data

Notes

General Contact connection method: Crimp connection Safety note Safety note WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property. • WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. · WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. • The products are suitable for applications in plant, controller, and electrical device engineering. · When operating the connectors in outdoor applications, they must be separately protected against environmental influences. · Assembled products may not be manipulated or improperly opened. • Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). · When using the product in direct connection with third-party manufacturers, the user is responsible. • For operating voltages > 50 V AC, conductive connector housings must be grounded · Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. · Observe the corresponding technical data. You will find information. o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product · Only use tools recommended by Phoenix Contact • Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products Ensure that the protective or functional ground has been properly connected. • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector



https://www.phoenixcontact.com/pc/products/1523434

| | • The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12). |
|--|--|
| lounting | |
| Mounting type | Front mounting M16 x 1.5 |
| roduct properties | |
| Product type | Circular connectors (device side) |
| Application | Signal |
| Sensor type | Universal |
| Number of positions | 4 |
| No. of cable outlets | 1 |
| Shielded | no |
| Coding | А |
| Thread type | M12 |
| Insulation characteristics | |
| Overvoltage category | II |
| Degree of pollution | 3 |
| laterial specifications | |
| | |
| Flammability rating according to UL 94 | V0 |
| Flammability rating according to UL 94 Seal material | V0 NBR/FKM |
| | |
| Seal material | NBR/FKM |
| Seal material Contact material | NBR/FKM CuZn |
| Seal material Contact material Contact surface material | NBR/FKM CuZn Ni/Au |
| Seal material Contact material Contact surface material Contact carrier material | NBR/FKM CuZn Ni/Au PA 6.6 |
| Seal material Contact material Contact surface material Contact carrier material Material for screw connection Conductor material | NBR/FKM CuZn Ni/Au PA 6.6 Zinc die-cast, nickel-plated |
| Seal material Contact material Contact surface material Contact carrier material Material for screw connection Conductor material | NBR/FKM CuZn Ni/Au PA 6.6 Zinc die-cast, nickel-plated |
| Seal material Contact material Contact surface material Contact carrier material Material for screw connection Conductor material | NBR/FKM CuZn Ni/Au PA 6.6 Zinc die-cast, nickel-plated Tin-plated Cu litz wires |
| Seal material Contact material Contact surface material Contact carrier material Material for screw connection Conductor material Iectrical properties Rated surge voltage | NBR/FKM CuZn Ni/Au PA 6.6 Zinc die-cast, nickel-plated Tin-plated Cu litz wires 2.5 kV |
| Seal material Contact material Contact surface material Contact carrier material Material for screw connection Conductor material Idectrical properties Rated surge voltage Contact resistance | NBR/FKMCuZnNi/AuPA 6.6Zinc die-cast, nickel-platedTin-plated Cu litz wires2.5 kV $\leq 3 m\Omega$ |
| Seal material Contact material Contact surface material Contact carrier material Material for screw connection Conductor material Idectrical properties Rated surge voltage Contact resistance Insulation resistance | NBR/FKMCuZnNi/AuPA 6.6Zinc die-cast, nickel-platedTin-plated Cu litz wires2.5 kV \leq 3 mQ \geq 100 MQ |
| Seal material Contact material Contact surface material Contact carrier material Material for screw connection Conductor material Idectrical properties Rated surge voltage Contact resistance Insulation resistance | NBR/FKMCuZnNi/AuPA 6.6Zinc die-cast, nickel-platedTin-plated Cu litz wires2.5 kV $\leq 3 m\Omega$ $\geq 100 M\Omega$ 250 V (AC) |

Conductor connection Connection method Individual wires Contact connection type Socket



https://www.phoenixcontact.com/pc/products/1523434

| Conductor cross section | 0.34 mm ² |
|---------------------------------|---|
| Tightening torque | 3 Nm 4 Nm (Installation-side) |
| lechanical properties | |
| | |
| Mechanical data | |
| Insertion/withdrawal cycles | > 100 |
| onnector | |
| Connection 1 | |
| Head design | Socket |
| Head cable outlet | straight |
| Head thread type | M12 |
| Coding | А |
| Connection 2 | |
| Head design | free cable end |
| | |
| able/line | |
| Cable length | 0.5 m |
| Cable type | TPE litz wire |
| Signal type/category | Universal |
| Wire diameter incl. insulation | 1.2 mm ±0.07 mm |
| Single wire, color | brown, white, blue, black |
| Cable cross section | 0.34 mm ² |
| Conductor material | Tin-plated Cu litz wires |
| Conductor structure signal line | 7x 0.25 mm |
| AWG signal line | 22 |
| Material wire insulation | TPE |
| Thickness, insulation | 0.21 mm (Core insulation) |
| Nominal voltage, cable | 300 V |
| Test voltage, cable | 2000 V AC |
| Cable resistance | ≤ 57.6 mΩ/m |
| Cable insulation resistance | ≥ 20 MΩ*km |
| Ambient temperature (operation) | -40 °C 85 °C (cable, fixed installation) |
| | -25 °C 85 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| Degree of protection | IP67 | |
|---------------------------------|---|--|
| | IP65/IP67 | |
| Ambient temperature (operation) | -25 °C 85 °C (Plug / socket) | |
| | -40 °C 85 °C (without mechanical actuation) | |



https://www.phoenixcontact.com/pc/products/1523434

| -25 °C 85 °C (Cable, flexible installation) |
|---|
| -40 °C 85 °C (cable, fixed installation) |
| |

Standards and regulations

| M12 | | |
|--------------------------|-----------------|--|
| Standard designation | M12 connector | |
| Standards/specifications | IEC 61076-2-101 | |

SACC-E-FS-4CON-M16/0,5 SCO - Device connector front mounting




1523434

https://www.phoenixcontact.com/pc/products/1523434

Drawings

Schematic diagram

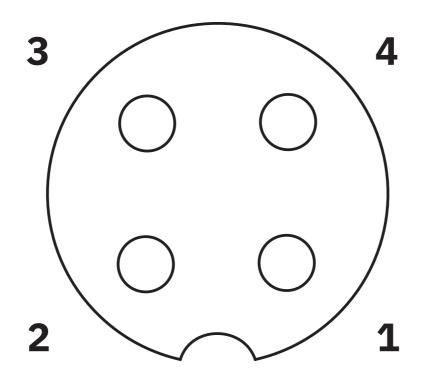

Pin assignment M12 socket, 4-pos., A-coded, view female side

SACC-E-FS-4CON-M16/0,5 SCO - Device connector front mounting



1523434

https://www.phoenixcontact.com/pc/products/1523434

Circuit diagram

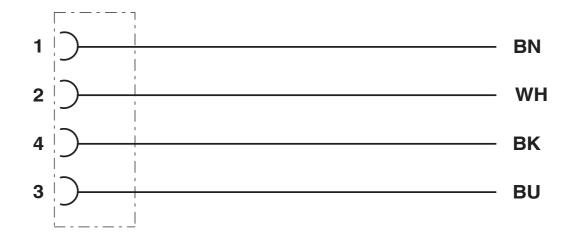


Diagram 9 8 7 6 1 5 4 3 2 $1 = 4x0,34mm^2$ 1 0 10 20 30 40 50 60 70 80 90 100 110 120 130 0 ϑ[°C]

I = current strength, T = ambient temperature



https://www.phoenixcontact.com/pc/products/1523434

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/1523434

| UL Recognized Approval ID: E118976-20100522 | | | | |
|---|--------------------------------|--------------------------------|-------------------|-------------------------------|
| | Nominal voltage U _N | Nominal current I _N | Cross section AWG | Cross section mm ² |
| | 250 V | 4 A | 22 - 22 | - |

| 6 91 .05 | CULus Recognized Approval ID: E221474-20140616 | | | | |
|-----------------|---|--------------------------------|--------------------------------|-------------------|-------------------------------|
| | | Nominal voltage U _N | Nominal current I _N | Cross section AWG | Cross section mm ² |
| | | 250 V | 4 A | 22 - 20 | - |



https://www.phoenixcontact.com/pc/products/1523434

Classifications

ECLASS

| | ECLASS-11.0 | 27440102 | | |
|----|-------------|----------|--|--|
| | ECLASS-12.0 | 27440116 | | |
| | ECLASS-13.0 | 27440116 | | |
| ΕT | ETIM | | | |
| | ETIM 9.0 | EC002635 | | |
| UN | UNSPSC | | | |
| | UNSPSC 21.0 | 39121400 | | |



https://www.phoenixcontact.com/pc/products/1523434

Environmental product compliance

EU RoHS

| Fulfills EU RoHS substance requirements | Yes, No exemptions | | | |
|---|--|--|--|--|
| China RoHS | | | | |
| Environment friendly use period (EFUP) | EFUP-E | | | |
| | No hazardous substances above the limits | | | |
| EU REACH SVHC | | | | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% | | | |

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com