

1552971

https://www.phoenixcontact.com/us/products/1552971

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 5-position, Pin, straight, M12-SPEEDCON, coding: B, Rear mounting, M12 \times 1, Solder pins, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240022

Your advantages

- · Easy PCB assembly: one-piece connectors for wave soldering
- · All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · SPEEDCON fast locking system reduces cabling times
- · For high transmission reliability: optional shield connection to the housing by means of shield contact

Commercial data

Item number	1552971
Packing unit	20 pc
Minimum order quantity	20 pc
Note	Made to order (non-returnable)
Sales key	AB26
Product key	ABQEGA
Catalog page	Page 188 (C-2-2013)
GTIN	4046356162005
Weight per piece (including packing)	8.615 g
Weight per piece (excluding packing)	8.203 g
Customs tariff number	85366990
Country of origin	DE



1552971

https://www.phoenixcontact.com/us/products/1552971

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Order information:	Lock nut is included in the scope of delivery

Mounting

Mounting type	Rear mounting M12 x 1 With flat nut
Assembly note	With flat nut

Product properties

Product type	Circular connectors (device side)
Number of positions	5
Shielded	yes
Coding	В
Thread type	M12
Insulation characteristics	
Overvoltage category	II

3

Material specifications

Degree of pollution

Flammability rating according to UL 94	V0
Seal material	NBR
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Rated surge voltage	1.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	60 V
Nominal current I _N	4 A

Connection data

Conductor of	connection
--------------	------------

Connection method	Solder pins
-------------------	-------------



1552971

https://www.phoenixcontact.com/us/products/1552971

Contact connection type	Pin
Tightening torque	3 Nm 4 Nm (Installation-side)

Mechanical properties

Mechanical data

Wedianical data	
Insertion/withdrawal cycles	> 100

Connector

Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON
Coding	В

Cable/line

Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)
	-25 °C 85 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67 (When plugged in)
	IP65 (When plugged in)
	IP65/IP67
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 85 °C (Cable, flexible installation)
	-40 °C 85 °C (cable, fixed installation)

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101




1552971

https://www.phoenixcontact.com/us/products/1552971

Drawings

Schematic diagram

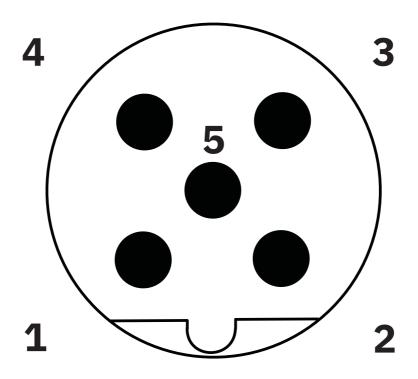

Pin assignment M12 male connector, 5-pos., B-coded, male side



1552971

https://www.phoenixcontact.com/us/products/1552971

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1552971

7. 1	UL Recognized Approval ID: E118976-20100522				
		Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
		60 V	4 A	22 - 22	-

c 911 us	CULus Recognized Approval ID: E221474-20140616				
		Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
		60 V	4 A	22 - 20	-



1552971

https://www.phoenixcontact.com/us/products/1552971

Classifications

ECLASS

UNSPSC 21.0

252.65			
	ECLASS-11.0	27440102	
	ECLASS-12.0	27440116	
	ECLASS-13.0	27440116	
ETIM			
	ETIM 9.0	EC002635	
UNSPSC			

39121400



1552971

https://www.phoenixcontact.com/us/products/1552971

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	2f91f376-a930-4214-884b-65decd31ed23



1552971

https://www.phoenixcontact.com/us/products/1552971

Accessories

PROT-M12 FS - Sealing cap

1560251

https://www.phoenixcontact.com/us/products/1560251



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

PROT-M12 FS-M - Sealing cap

1430488

https://www.phoenixcontact.com/us/products/1430488



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com