

K-12 - OE/010-E00/M23 F8 - Cable plug in molded plastic



1619274

<https://www.phoenixcontact.com/sg/products/1619274>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable plug in molded plastic, Straight, plastic molded, number of positions: 12, type of locking: Screw locking mechanism, cable length: 10 m, shielded: yes, color of outer sheath: orange RAL 2003

Your advantages

- Our standard: robust halogen-free PUR cable
- Simple and safe: 100% electrically tested and assembled ready for use
- Designs with preassembled cables on one or both sides
- High flexibility: customer-specific assemblies and cable lengths can be supplied

Commercial data

Item number	1619274
Packing unit	1 pc
Minimum order quantity	2 pc
Note	Made to order (non-returnable)
Sales key	*****
Product key	ABRDFA
Catalog page	Page 217 (C-2-2019)
GTIN	4046356833486
Weight per piece (including packing)	1,130 g
Weight per piece (excluding packing)	974.8 g
Customs tariff number	85444290
Country of origin	DE

K-12 - OE/010-E00/M23 F8 - Cable plug in molded plastic



1619274

<https://www.phoenixcontact.com/sg/products/1619274>

Technical data

Product properties

Product type	Signal and power cable
--------------	------------------------

Data management status

Article revision	11
------------------	----

Connector

Connector specifications

Type	Straight, plastic molded
Housing material	Zinc die-cast
Type of locking	Screw locking mechanism
Degree of protection	IP67, when in locked state
No. of pos.	12
Direction of rotation	Standard
Insertion/withdrawal cycles	50
Contact resistance	< 0.3 mΩ
Max. current	8 A
Voltage	48 V AC 74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV
Ambient temperature (operation)	-40 °C ... 105 °C

Cable specifications

Cable type	RSL9YSLC11Y
Shielded	yes
Cable structure	4 x 2 x 0.25 mm ² + 2 x 0.5 mm ²
Cable structure (AWG)	24 AWG/4pr + 20 AWG/2c
External cable diameter	8.00 mm
Outer sheath, material	TPU
Material wire insulation	PP
External sheath, color	orange RAL 2003
Test voltage	1 kV
Rated current	9 A
Smallest bending radius, fixed installation	40 mm
Smallest bending radius, movable installation	60 mm
Ambient temperature (operation) for fixed installation	-40 °C ... 80 °C
Ambient temperature (operation) for flexible installation	-20 °C ... 60 °C

Electrical properties

Nominal current I _N	9 A
--------------------------------	-----

K-12 - OE/010-E00/M23 F8 - Cable plug in molded plastic



1619274

<https://www.phoenixcontact.com/sg/products/1619274>

Cable/line

Cable length	10 m
--------------	------


K-12 - OE/010-E00/M23 F8 - Cable plug in molded plastic

1619274


<https://www.phoenixcontact.com/sg/products/1619274>

Drawings

Circuit diagram

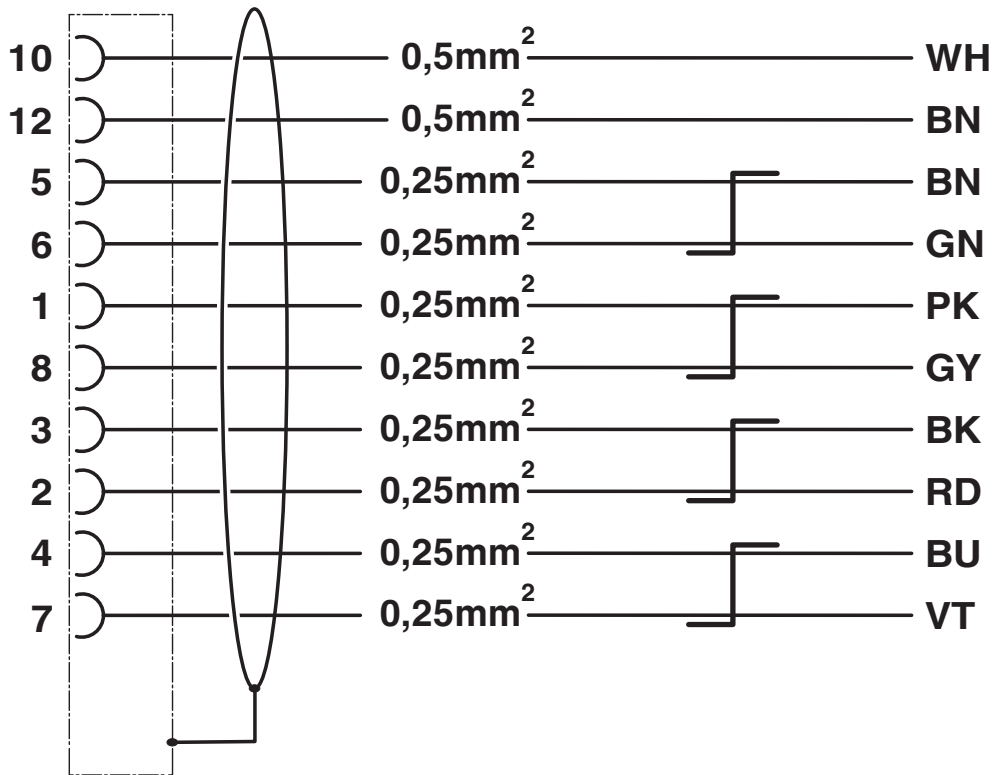

Dimensional drawing

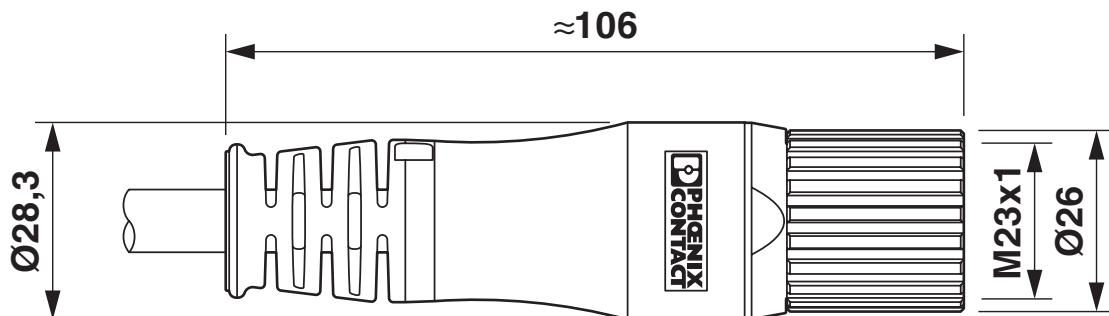


Dimensional drawing

K-12 - OE/010-E00/M23 F8 - Cable plug in molded plastic

1619274

<https://www.phoenixcontact.com/sg/products/1619274>

Schematic diagram

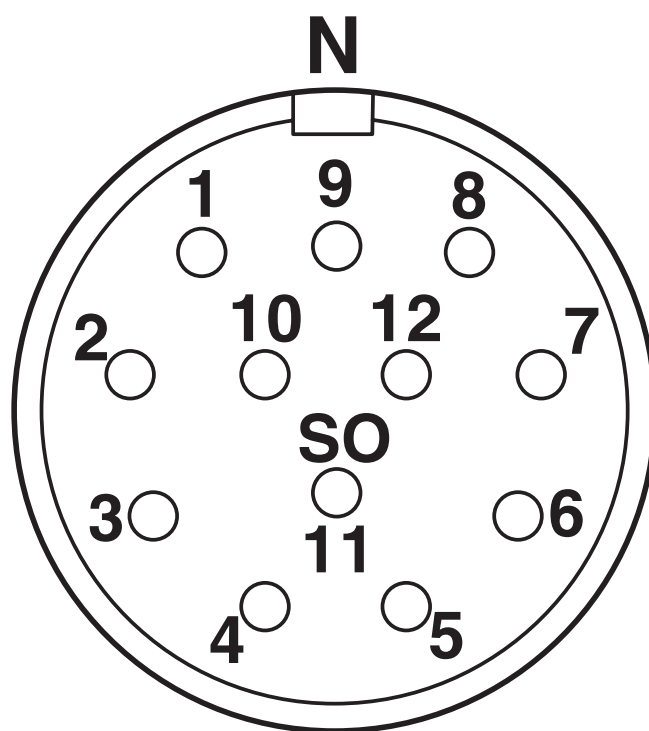

Connector pin assignment

K-12 - OE/010-E00/M23 F8 - Cable plug in molded plastic



1619274

<https://www.phoenixcontact.com/sg/products/1619274>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sg/products/1619274>



EAC

Approval ID: 19060508



UL Listed

Approval ID: E335019-20140707

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Power	48 V	5 A	-	-
Signal	48 V	2 A	-	-



cUL Listed

Approval ID: E335019-20140707

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Power	48 V	5 A	-	-
Signal	48 V	2 A	-	-

cULus Listed

K-12 - OE/010-E00/M23 F8 - Cable plug in molded plastic



1619274

<https://www.phoenixcontact.com/sg/products/1619274>

Classifications

ECLASS

ECLASS-11.0	27060106
ECLASS-12.0	27060106
ECLASS-13.0	27060106

ETIM

ETIM 9.0	EC003250
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

K-12 - OE/010-E00/M23 F8 - Cable plug in molded plastic



1619274

<https://www.phoenixcontact.com/sg/products/1619274>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(b), 6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	d48a33bd-ea3b-46da-9d0c-19aa60bc6f41

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.

105 Eunos Avenue 3, #04-00

Singapore 409836

+65 6228 4900

marketing@phoenixcontact.com.sg