

# CA-12S1N12T006S - Cable connector

1619412

<https://www.phoenixcontact.com/be/products/1619412>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

M23, Cable connector, series: CA, angled, shielded: yes, SPEEDCON, No. of pos.: 12, Direction of rotation: Standard, contact connection type: Socket, Solder connection, cable diameter range: 4 mm ... 6 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243530



## Your advantages

- Angled cable outlet for confined spaces
- Can be adapted to various applications, thanks to adjustable cable outlet direction
- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Reduced connection time with SPEEDCON fast locking system
- Solder connection: proven connection technology for various litz wires

## Commercial data

Item number	1619412
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	ABRAED
Product key	ABRAED
Catalog page	Page 90 (C-2-2019)
GTIN	4046356824354
Weight per piece (including packing)	191,3 g
Weight per piece (excluding packing)	191,3 g
Customs tariff number	85366990
Country of origin	DE

# CA-12S1N12T006S - Cable connector

1619412

<https://www.phoenixcontact.com/be/products/1619412>



## Technical data

### Notes

Order information:	Order 12 x 1 mm crimp contacts separately
--------------------	---

### Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

#### Data management status

Article revision	07
------------------	----

### Connector

#### Connection 1

Head design	Socket
-------------	--------

#### Insulating body

Coding	N
Insulation body material	PBT
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	100
Connection method	Solder connection
Contact switching type	Socket
Application	Signal
Number of positions	12
Direction of rotation	Standard
Connection profile	12
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Oversupply category	III
Degree of pollution	3
Contact diameter	Signal contacts
Litz wire cross-section	Signal contacts max.
Nominal current per signal contact	1 mm <sup>2</sup>
	8 A

#### Housing

Housing material	Metal
Type of locking	SPEEDCON
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

#### Seal

# CA-12S1N12T006S - Cable connector

1619412

<https://www.phoenixcontact.com/be/products/1619412>



External cable diameter	4 mm ... 6 mm
Seal material	NBR

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
Ambient temperature (storage/transport)	15 °C ... 25 °C
Permissible humidity (storage/transport)	50 % ... 65 %

# CA-12S1N12T006S - Cable connector


1619412

<https://www.phoenixcontact.com/be/products/1619412>



## Drawings

Schematic diagram

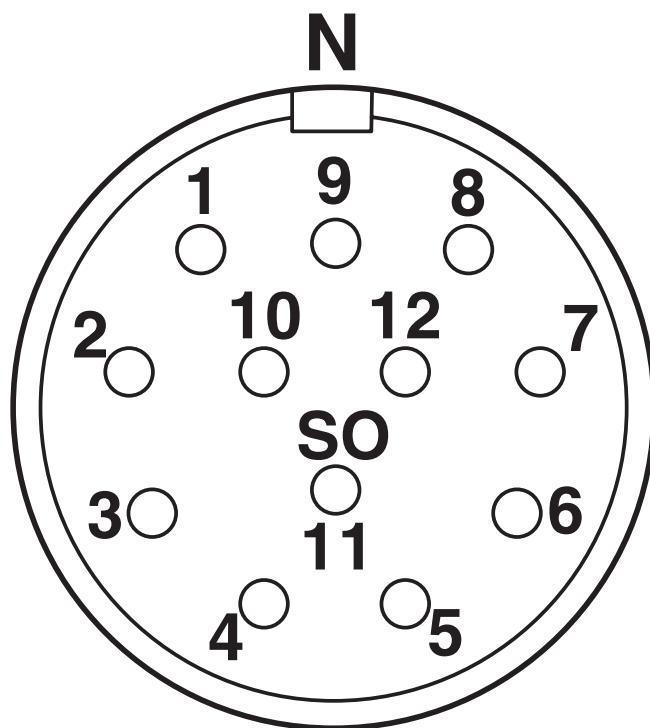

Connector pin assignment

# CA-12S1N12T006S - Cable connector

1619412

<https://www.phoenixcontact.com/be/products/1619412>



## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/be/products/1619412>

cUL Recognized	
Approval ID: E335019-20141210	
Nominal voltage $U_N$	Nominal current $I_N$
48 V	6 A
Cross section AWG	Cross section $mm^2$
18 - 18	-

UL Recognized	
Approval ID: E335019-20141210	
Nominal voltage $U_N$	Nominal current $I_N$
48 V	8 A
Cross section AWG	Cross section $mm^2$
18 - 18	-

cULus Recognized

# CA-12S1N12T006S - Cable connector

1619412

<https://www.phoenixcontact.com/be/products/1619412>



## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# CA-12S1N12T006S - Cable connector

1619412

<https://www.phoenixcontact.com/be/products/1619412>



## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	8b738d17-4905-4fb8-802c-451c8388d496

# CA-12S1N12T006S - Cable connector

1619412

<https://www.phoenixcontact.com/be/products/1619412>



## Accessories

### SF-Z0028 - Torque screwdriver

1607456

<https://www.phoenixcontact.com/be/products/1607456>

Torque screwdriver, series: RC, UC, SH, SF



### SF-Z0027 - Hook wrench

1607455

<https://www.phoenixcontact.com/be/products/1607455>

Hook wrench, series: RC, UC, RF, SF



# CA-12S1N12T006S - Cable connector

1619412

<https://www.phoenixcontact.com/be/products/1619412>



## RF-Z0014 - Color coding

1620588

<https://www.phoenixcontact.com/be/products/1620588>

Color coding, color: green



---

## RF-Z0015 - Color coding

1620592

<https://www.phoenixcontact.com/be/products/1620592>

Color coding, color: orange



# CA-12S1N12T006S - Cable connector

1619412

<https://www.phoenixcontact.com/be/products/1619412>



## RF-Z0016 - Color coding

1620593

<https://www.phoenixcontact.com/be/products/1620593>

Color coding, color: black



---

## PROT-M23-SG-IT-IP20 - Plastic protective cap

1577206

<https://www.phoenixcontact.com/be/products/1577206>

Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM



---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT nv/sa  
Minervalaan 10-12  
1930 Zaventem-Keiberg II  
+32 (0)2/723 98 11  
[info@phoenixcontact.be](mailto:info@phoenixcontact.be)